

T8

10T8/COR/48-850/IF16/G 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.


Product data

General Information		Starting Time (Nom)		0.5 s
Base	G13 [Medium Bi-Pin Fluorescent]	Warm Up Time to 60% Light (Nom)		0.5 s
EU RoHS compliant	Yes	Power Factor (Nom)		0.9
Nominal Lifetime (Nom)	50000 h	Voltage (Nom)		120-277, 347 V
Switching Cycle	50000X			
Light Technical		Temperature		
Color Code	850 [CCT of 5000K]	T-Ambient (Max)		45 °C
Initial lumen (Nom)	1600 lm	T-Ambient (Min)		-20 °C
Correlated Color Temperature (Nom)	5000 K	T-Storage (Max)		65 °C
Luminous Efficacy (rated) (Nom)	160.00 lm/W	T-Storage (Min)		-40 °C
Color Consistency	<5	T-Case Maximum (Nom)		50 °C
Color Rendering Index (Nom)	82			
LLMF At End Of Nominal Lifetime (Nom)	70 %	Controls and Dimming		
		Dimmable		No
Operating and Electrical		Mechanical and Housing		
Input Frequency	25000-105000 Hz	Product Length		1200 mm
Power (Rated) (Nom)	10 W			
Lamp Current (Max)	260 mA	Approval and Application		
Lamp Current (Min)	100 mA	Energy Saving Product		Yes

Approbation Marks	RoHS compliance UL certificate DLC compliance
Product Data	
XUCDM.COPY.Product.Title	10T8/COR/48-850/IF16/G 10/1
EAN/UPC - Product	046677553241
Order code	553248

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001991834
Net Weight (Piece)	0.230 kg
Model Number	9290019918


Dimensional drawing

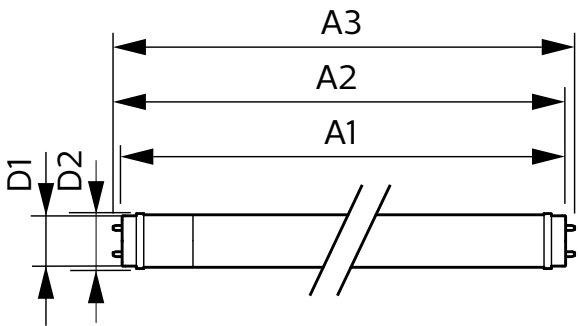


TLED 1200mmT8 120-277 10.5W 1650lm 5000K

Product	D1	D2	A1	A2	A3
10T8/COR/48-850/IF16/G 10/1	25.7 mm	28 mm	1198.1 mm	1205.2 mm	1212.3 mm


Photometric data



LEDtube 10W G13 850 ND




LEDtube 10W G13 850 ND

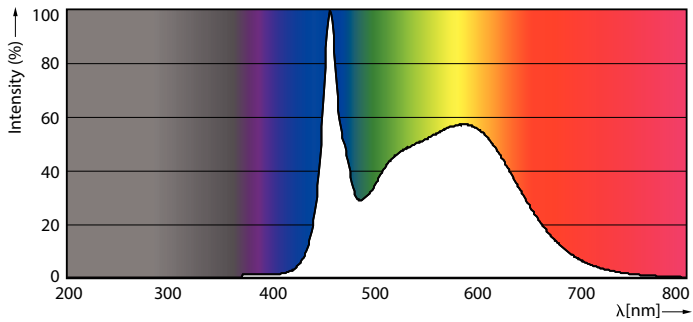


LEDtube 10W G13 850 ND


Lifetime

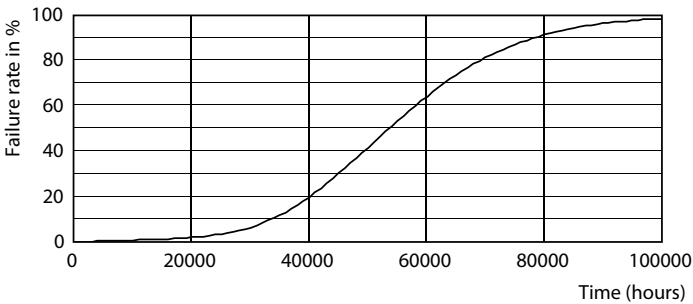


LEDtube 10W G13 850 ND

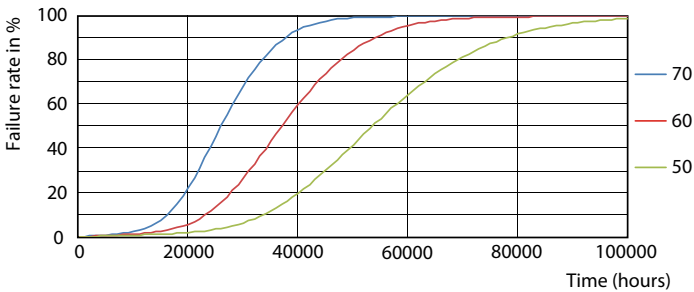


LEDtube 10W G13 850 ND

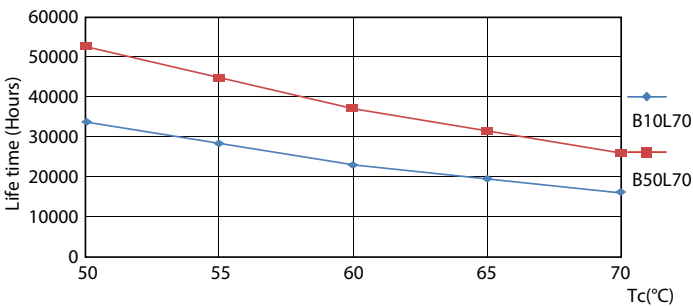

LEDtube 10W G13 850 ND

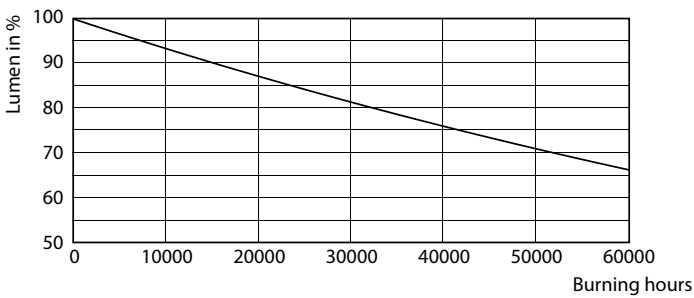

LEDtube 10W G13 850 ND

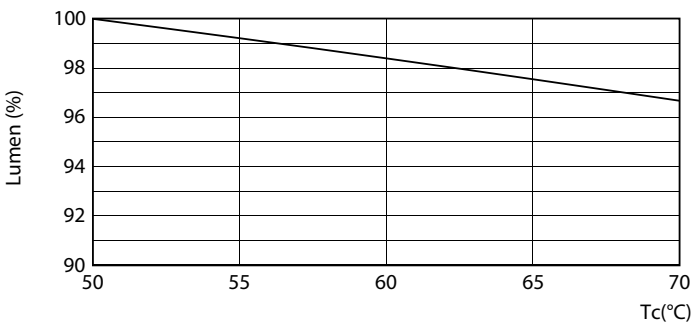

LEDtube 10W G13 850 ND

