



PAR30/PAR20 LED

12.5PAR30L/F25 4000 DIM SO

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12.7-75W
Light Technical	
Color Code	841 [CCT of 4100K (841)]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	950 lm
Luminous Flux (Rated) (Nom)	950 lm
Luminous Intensity (Nom)	5200 cd
Color Designation	Cool White (CW)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	12.7 W
Lamp Current (Nom)	125 mA

Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	89 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy star mark	Energy star
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	Not applicable
Product Data	
Order product name	120V PAR30L 12.7W 25D 4000K 900 D SO
EAN/UPC - Product	046677454685
Order code	454686
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001132504


PAR30/PAR20 LED

Net Weight (Piece)	0.001 kg
--------------------	----------

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005.



Dimensional drawing



PAR30L CL 120V 12.5W-75W 25D 4000K E26 D

Product	D	C
120V PAR30L 12.7W 25D 4000K 900 D SO	92 mm	116 mm

Photometric data

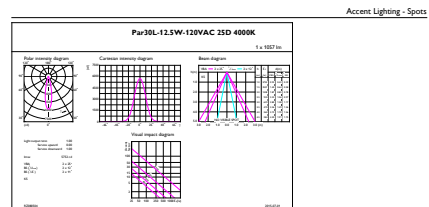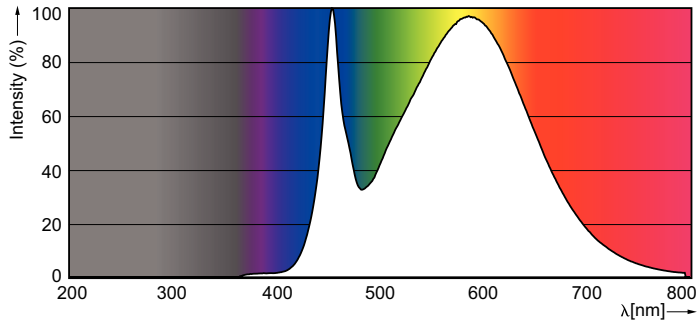

PAR30/PAR20 LED

