



BR/R LED

BC9.5BR30/AMB/927/DIM 120V

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.

Product data


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	9.5-65W
Light Technical	
Color Code	927
Beam Angle (Nom)	110 °
Luminous Flux (Nom)	650 lm
Luminous Flux (Rated) (Nom)	650 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (Rated) (Nom)	84.21 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	9.5 W
Lamp Current (Nom)	100 mA
Wattage Equivalent	65 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	76 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Approval and Application	
Suitable For Accent Lighting	Yes
Product Data	
Order product name	BC9.5BR30/AMB/927/DIM 120V
EAN/UPC - Product	046677465209
Order code	929001221803
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

BR/R LED

Material Nr. (12NC)	929001221803
Net Weight (Piece)	0.001 kg



Dimensional drawing




BR30_Gen5 120V 9.5-65W 2700K E26 D

Product	D	C
BC9.5BR30/AMB/927/DIM 120V	96 mm	132 mm

Photometric data

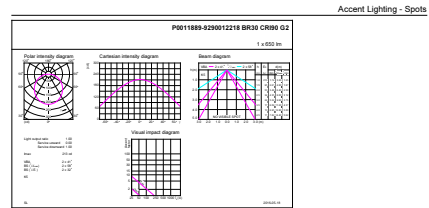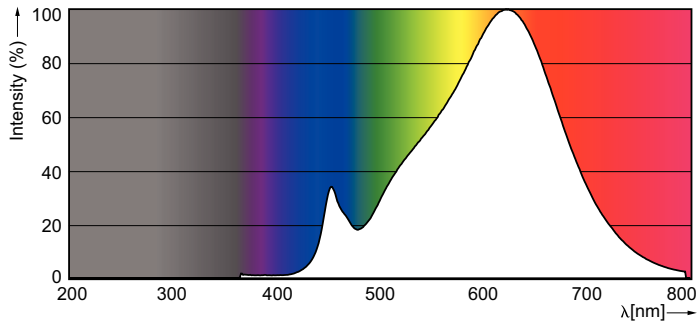

Calculux Photometrics 4.5 Philips Lighting B.V. Page 1/1



BR/R LED

