

# General Purpose Taper Length Drill

## Styles

### R51, R52, R55

	HSS
	ANSI
	6XD
	118°
	R51 R52 R55
	N80 - 1.3/4
1.1	89G
1.2	82G
1.3	66E
1.4	52E
1.5	30D
1.6	20B
1.7	
1.8	
2.1	33D
2.2	20F
2.3	13B
2.4	
3.1	92H
3.2	69E
3.3	49D
3.4	43D
4.1	56E
4.2	30C
4.3	13A
5.1	26F
5.2	13D
5.3	10A
6.1	98E
6.2	105H
6.3	89G
6.4	52E
7.1	105I
7.2	89H
7.3	89G
7.4	82E
8.1	115I
8.2	85G
8.3	39E
9.1	10A
10.1	

**How To Use This Chart:**

- 1. Determine your Workpiece Material from the Application Material Groups (AMG) below.
- 2. Use the Icons to find Product Features.
- 3. Find the Surface Feet Per Minute (SFM) and Alpha Code  
 example: 361W  
 361 = SFM  
 W = Alpha Code used to find your Feed Rate

## Feed Rate Chart

Alpha Code	Feed in Inches per Revolution (IPR) ± 25%															Ø Diameter				
	1mm/ 1/32"	2mm/ 3/32"	3mm/ 1/8"	4mm/ 5/32"	5mm/ 3/16"	6mm/ 1/4"	8mm/ 5/16"	10mm/ 3/8"	12mm/ 1/2"	15mm/ 9/16"	16mm/ 5/8"	20mm/ 3/4"	25mm/ 1"	30mm/ 1.1/8"	40mm/ 1.5/8"	50mm/ 2"				
A	0.0004	0.0009	0.0011	0.0013	0.0014	0.0017	0.0021	0.0024	0.0027	0.0032	0.0034	0.0043	0.0049	0.0053	0.0061	0.0069				
B	0.0006	0.0011	0.0015	0.0016	0.0018	0.0021	0.0026	0.0031	0.0035	0.0041	0.0043	0.0053	0.0060	0.0065	0.0074	0.0082				
C	0.0006	0.0013	0.0017	0.0020	0.0022	0.0025	0.0031	0.0039	0.0043	0.0049	0.0051	0.0063	0.0071	0.0077	0.0087	0.0094				
D	0.0006	0.0015	0.0021	0.0024	0.0027	0.0031	0.0039	0.0047	0.0051	0.0059	0.0061	0.0074	0.0083	0.0090	0.0100	0.0108				
E	0.0007	0.0017	0.0024	0.0028	0.0031	0.0037	0.0045	0.0055	0.0059	0.0068	0.0071	0.0085	0.0094	0.0102	0.0112	0.0122				
F	0.0007	0.0020	0.0029	0.0033	0.0037	0.0043	0.0054	0.0065	0.0070	0.0080	0.0083	0.0098	0.0108	0.0116	0.0126	0.0135				
G	0.0007	0.0022	0.0033	0.0038	0.0043	0.0050	0.0063	0.0075	0.0081	0.0091	0.0094	0.0110	0.0122	0.0130	0.0140	0.0148				
H	0.0008	0.0026	0.0040	0.0046	0.0051	0.0059	0.0075	0.0090	0.0096	0.0107	0.0110	0.0126	0.0140	0.0148	0.0157	0.0165				
I	0.0008	0.0030	0.0047	0.0053	0.0059	0.0068	0.0087	0.0104	0.0110	0.0122	0.0126	0.0142	0.0157	0.0165	0.0173	0.0181				
J	0.0009	0.0033	0.0053	0.0060	0.0067	0.0078	0.0098	0.0117	0.0124	0.0137	0.0142	0.0159	0.0175	0.0183	0.0191	0.0198				
K	0.0010	0.0036	0.0059	0.0067	0.0075	0.0087	0.0110	0.0130	0.0138	0.0153	0.0157	0.0177	0.0193	0.0201	0.0209	0.0215				
L	0.0011	0.0040	0.0065	0.0073	0.0082	0.0094	0.0120	0.0142	0.0152	0.0165	0.0169	0.0191	0.0207	0.0215	0.0224	0.0231				
M	0.0012	0.0043	0.0071	0.0080	0.0089	0.0102	0.0130	0.0154	0.0165	0.0177	0.0181	0.0205	0.0220	0.0228	0.0238	0.0248				
N	0.0013	0.0047	0.0077	0.0086	0.0095	0.0110	0.0140	0.0165	0.0179	0.0189	0.0193	0.0219	0.0234	0.0242	0.0253	0.0265				
S	0.0003	0.0006	0.0008	0.0010	0.0012	0.0015	0.0020	0.0031	0.0039	0.0048	0.0051	0.0059	0.0070	0.0070	0.0090					
T	0.0006	0.0011	0.0016	0.0020	0.0024	0.0028	0.0035	0.0043	0.0051	0.0063	0.0067	0.0075	0.0080	0.0090	0.0100					
U	0.0010	0.0019	0.0028	0.0031	0.0035	0.0042	0.0055	0.0067	0.0079	0.0088	0.0091	0.0094	0.0110	0.0120	0.0140					
V	0.0015	0.0027	0.0039	0.0045	0.0051	0.0060	0.0079	0.0098	0.0110	0.0122	0.0126	0.0134	0.0160	0.0170	0.0200					
W	0.0019	0.0035	0.0051	0.0059	0.0067	0.0079	0.0102	0.0130	0.0150	0.0165	0.0169	0.0177	0.0190	0.0190	0.0200					
X	0.0022	0.0041	0.0059	0.0071	0.0083	0.0098	0.0130	0.0165	0.0189	0.0210	0.0217	0.0228								
Y	0.0027	0.0049	0.0071	0.0087	0.0102	0.0125	0.0169	0.0217	0.0276	0.0276	0.0276	0.0291								
Z	0.0037	0.0068	0.0098	0.0128	0.0157	0.0210	0.0315	0.0394	0.0433	0.0463	0.0472	0.0472								

### How To Use This Chart to Find Cutting Feed Rate (IPR):

1. Find your Alpha Code on the AMG Chart (example: 279 U : U is the Alpha Code)
2. Find the closest diameter for your cutting application on the chart to find your IPR

Application Material Groups (AMG)		Hardness HRC	ISO	
1. Steel	1.1 Magnetic soft steel	12L14, 12L15	<120 HB	P 1
	1.2 Structural Steel/ case carburising steel	1005-1025, 1214, 1215, A36	<200 HB	P 1
	1.3 Plain Carbon steel	1030-1060, 1050-1060, 1144-1146	<24	P 2
	1.4 Alloy steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	<24	P 3
	1.5 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>24<38	P 4
	1.6 Alloy steel/ Hardened and tempered steel	4140,4340,52100,8620 H11-H41,A2,D2,01,P20,420	>38	H 1
	1.7 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	49-55	H 3
	1.8 Alloy steel Hardened	A2-D2, H10-H41, L1-L6, M1-M42, T1	55-63	H 4
2. Stainless Steel	2.1 Free machining Stainless Steel	200, 303, 416, 420F, 430F, 440	<24	M 1
	2.2 Austenitic	301, 302, 304, 316, 321, 330, CUSTOM 455, AM-350	<24	M 3
	2.3 Ferritic + Austenitic, Martensitic	318-329, 400-446, DUPLEX	<32	M 2
	2.4 Precipitation Hardened	15-5PH, Custom 450 17-4PH	<32	S 2
3. Cast Iron	3.1 Lamellar graphite	Grey, G10, Gg40, J431C, A48 CLASS 20	<150 HB	K 1
	3.2 Lamellar graphite	Grey, GG25-Gg40, J158, A48 CLASS 40-60	>150 HB<32	K 2
	3.3 Nodular graphite/ Malleable Cast Iron	A220, A436, A439, A602, Black, GGG40-GGG70	<200 HB	K 3
	3.4 Nodular graphite/ Malleable Cast Iron	Black Gts/Gtw, J434C	>200 HB<32	K 4
4. Titanium	4.1 Titanium, unalloyed	Commercially Pure	<200 HB	S 1
	4.2 Titanium, alloyed	6Al4V, 6A14V-2Sn, Monel, Monel K	<28	S 2
	4.3 Titanium, alloyed	6Al4V-4Mo, 7A14V-4Mo, 4911-4967	>28<38	S 3
5. Nickel	5.1 Nickel, unalloyed	Commercially Pure, 17644, 200, 5553	<150 HB	S 1
	5.2 Nickel, alloyed	Monel 400, Hastelloy C, Inconel 625, Waspaloy	<28	S 2
	5.3 Nickel, alloyed	Inconel 718, Nimonic 75-95, Rene 41, Inconel 825, A286	>28<38	S 3
6. Copper	6.1 Copper	Commercially Pure	<100 HB	N 3
	6.2 β-Brass, Bronze	314-340, 350-370	<200 HB	N 4
	6.3 α-Brass	Alloyed Cu + Al + Fe, Long Chipping	<200 HB	N 3
	6.4 High Strength Bronze	Ampco 18-25	<49	N 4
7. Aluminium Magnesium	7.1 Al, Mg, unalloyed	Commercially Pure	<100 HB	N 1
	7.2 Al alloyed, Si<0.5%	6061 T6, 7075, 314-340	<150 HB	N 1
	7.3 Al alloyed, Si>0.5%<10%	6061 T6, 380-390	<120 HB	N 1
	7.4 Al alloyed, Si>10% Mg alloys	Magnesium Whisker Reinforced	<120 HB	N 2
8. Synthetic Materials	8.1 Thermoplastics	Ultradim, Polystrol	---	O
	8.2 Thermosetting plastics	Bakelit, Pertinax	---	O
	8.3 Reinforced plastic materials	CFK, GFKAFK	---	O
9. Hard Mat.	9.1 Cermets (Metal-ceramics)	Ferrotic	<54	H
10. Graphite	10.1 Standard graphite		---	O



# TAPER LENGTH DRILL

## General Purpose Taper Length



**R51** - Fractional Sizes

**R52** - Wire Gauge Sizes

**R55** - Letter Sizes

Bright finish improves chip flow in soft or non-ferrous materials.  
Longer flute and Overall length for depth and reach.

\* Sizes 45/64 and larger are steam oxide

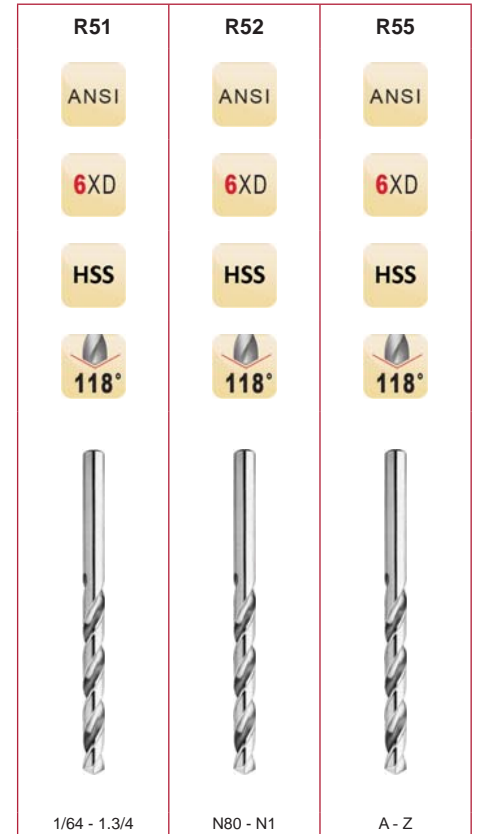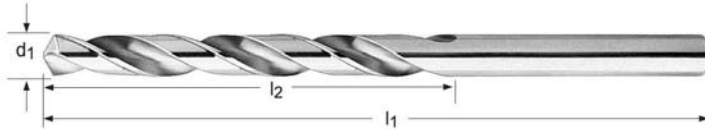

$d_1$ Ø Inch	$d_1$ Ø Nr.	$d_1$ Ø letter	$d_1$ decimal Inch	$l_2$ Inch	$l_1$ Inch	Pack Qty	R51	R52	R55
	80		0.0135	5/16	1.1/2	12	—	052080	—
	79		0.0145	5/16	1.1/2	12	—	052079	—
1/64			0.0156	5/16	1.1/2	12	051001	—	—
	78		0.0160	5/16	1.1/2	12	—	052078	—
	77		0.0180	5/16	1.1/2	12	—	052077	—
	76		0.0200	5/16	1.1/2	12	—	052076	—
	75		0.0210	5/16	1.1/2	12	—	052075	—
	74		0.0225	5/16	1.1/2	12	—	052074	—
	73		0.0240	5/16	1.1/2	12	—	052073	—
	72		0.0250	5/16	1.1/2	12	—	052072	—
	71		0.0260	3/4	2"	12	—	052071	—
	70		0.0280	3/4	2"	12	—	052070	—
	69		0.0292	3/4	2"	12	—	052069	—
	68		0.0310	3/4	2"	12	—	052068	—
1/32			0.0313	3/4	2"	12	051002	—	—
	67		0.0320	3/4	2"	12	—	052067	—
	66		0.0330	3/4	2"	12	—	052066	—
	65		0.0350	3/4	2"	12	—	052065	—
	64		0.0360	3/4	2"	12	—	052064	—
	63		0.0370	3/4	2"	12	—	052063	—
	62		0.0380	3/4	2"	12	—	052062	—
	61		0.0390	1.1/8	2.1/4	12	—	052061	—
	60		0.0400	1.1/8	2.1/4	12	—	052060	—
	59		0.0410	1.1/8	2.1/4	12	—	052059	—
	58		0.0420	1.1/8	2.1/4	12	—	052058	—
	57		0.0430	1.1/8	2.1/4	12	—	052057	—
	56		0.0465	1.1/8	2.1/4	12	—	052056	—
3/64			0.0469	1.1/8	2.1/4	12	051003	—	—
	55		0.0520	1.3/4	3"	12	—	052055	—
	54		0.0550	1.3/4	3"	12	—	052054	—
	53		0.0595	1.3/4	3"	12	—	052053	—
1/16			0.0625	1.3/4	3"	12	051004	—	—

# TAPER LENGTH DRILL



d <sub>1</sub> Ø Inch	d <sub>1</sub> Ø Nr.	d <sub>1</sub> Ø letter	d <sub>1</sub> decimal Inch	l <sub>2</sub> Inch	l <sub>1</sub> Inch	Pack Qty	R51	R52	R55
	52		0.0635	2"	3.3/4	12	—	052052	—
	51		0.0670	2"	3.3/4	12	—	052051	—
	50		0.0700	2"	3.3/4	12	—	052050	—
	49		0.0730	2"	3.3/4	12	—	052049	—
	48		0.0760	2"	3.3/4	12	—	052048	—
5/64			0.0781	2"	3.3/4	12	051005	—	—
	47		0.0785	2.1/4	4.1/4	12	—	052047	—
	46		0.0810	2.1/4	4.1/4	12	—	052046	—
	45		0.0820	2.1/4	4.1/4	12	—	052045	—
	44		0.0860	2.1/4	4.1/4	12	—	052044	—
	43		0.0890	2.1/4	4.1/4	12	—	052043	—
	42		0.0935	2.1/4	4.1/4	12	—	052042	—
3/32			0.0938	2.1/4	4.1/4	12	051006	—	—
	41		0.0960	2.1/2	4.5/8	12	—	052041	—
	40		0.0980	2.1/2	4.5/8	12	—	052040	—
	39		0.0995	2.1/2	4.5/8	12	—	052039	—
	38		0.1015	2.1/2	4.5/8	12	—	052038	—
	37		0.1040	2.1/2	4.5/8	12	—	052037	—
	36		0.1065	2.1/2	4.5/8	12	—	052036	—
7/64			0.1094	2.1/2	4.5/8	12	051007	—	—
	35		0.1100	2.3/4	5.1/8	12	—	052035	—
	34		0.1110	2.3/4	5.1/8	12	—	052034	—
	33		0.1130	2.3/4	5.1/8	12	—	052033	—
	32		0.1160	2.3/4	5.1/8	12	—	052032	—
	31		0.1200	2.3/4	5.1/8	12	—	052031	—
1/8			0.1250	2.3/4	5.1/8	12	051008	—	—
	30		0.1285	3"	5.3/8	12	—	052030	—
	29		0.1360	3"	5.3/8	12	—	052029	—
	28		0.1405	3"	5.3/8	12	—	052028	—
9/64			0.1406	3"	5.3/8	12	051009	—	—
	27		0.1440	3"	5.3/8	12	—	052027	—
	26		0.1470	3"	5.3/8	12	—	052026	—
	25		0.1495	3"	5.3/8	12	—	052025	—
	24		0.1520	3"	5.3/8	12	—	052024	—
	23		0.1540	3"	5.3/8	12	—	052023	—
5/32			0.1563	3"	5.3/8	12	051010	—	—
	22		0.1570	3.3/8	5.3/4	12	—	052022	—
	21		0.1590	3.3/8	5.3/4	12	—	052021	—
	20		0.1610	3.3/8	5.3/4	12	—	052020	—
	19		0.1660	3.3/8	5.3/4	12	—	052019	—
	18		0.1695	3.3/8	5.3/4	12	—	052018	—
11/64			0.1719	3.3/8	5.3/4	12	051011	—	—
	17		0.1730	3.3/8	5.3/4	12	—	052017	—
	16		0.1770	3.3/8	5.3/4	12	—	052016	—
	15		0.1800	3.3/8	5.3/4	12	—	052015	—
	14		0.1820	3.3/8	5.3/4	12	—	052014	—
	13		0.1850	3.3/8	5.3/4	12	—	052013	—
3/16			0.1875	3.3/8	5.3/4	12	051012	—	—
	12		0.1890	3.5/8	6"	12	—	052012	—
	11		0.1910	3.5/8	6"	12	—	052011	—
	10		0.1935	3.5/8	6"	12	—	052010	—
	9		0.1960	3.5/8	6"	12	—	052009	—
	8		0.1990	3.5/8	6"	12	—	052008	—
	7		0.2010	3.5/8	6"	12	—	052007	—
13/64			0.2031	3.5/8	6"	12	051013	—	—
	6		0.2040	3.5/8	6"	12	—	052006	—
	5		0.2055	3.5/8	6"	12	—	052005	—
	4		0.2090	3.5/8	6"	12	—	052004	—
	3		0.2130	3.5/8	6"	12	—	052003	—
7/32			0.2188	3.5/8	6"	12	051014	—	—
	2		0.2210	3.3/4	6.1/8	12	—	052002	—
	1		0.2280	3.3/4	6.1/8	12	—	052001	—
		A	0.2340	3.3/4	6.1/8	12	—	—	055001
15/64			0.2344	3.3/4	6.1/8	12	051015	—	—
		B	0.2380	3.3/4	6.1/8	12	—	—	055002
		C	0.2420	3.3/4	6.1/8	12	—	—	055003



# TAPER LENGTH DRILL

d <sub>1</sub> Ø Inch	d <sub>1</sub> Ø Nr.	d <sub>1</sub> Ø letter	d <sub>1</sub> decimal Inch	l <sub>2</sub> Inch	l <sub>1</sub> Inch	Pack Qty	R51	R52	R55
		D	0.2460	3.3/4	6.1/8	12	—	—	055004
		E	0.2500	3.3/4	6.1/8	12	—	—	055005
1/4			0.2500	3.3/4	6.1/8	12	051016	—	—
		F	0.2570	3.7/8	6.1/4	12	—	—	055006
		G	0.2610	3.7/8	6.1/4	6	—	—	055007
17/64			0.2656	3.7/8	6.1/4	6	051017	—	—
		H	0.2660	3.7/8	6.1/4	6	—	—	—
		I	0.2720	3.7/8	6.1/4	6	—	—	055009
		J	0.2770	3.7/8	6.1/4	6	—	—	055010
		K	0.2810	3.7/8	6.1/4	6	—	—	055011
9/32			0.2813	3.7/8	6.1/4	6	051018	—	—
		L	0.2900	4"	6.3/8	6	—	—	055012
		M	0.2950	4"	6.3/8	6	—	—	055013
19/64			0.2969	4"	6.3/8	6	051019	—	—
		N	0.3020	4"	6.3/8	6	—	—	055014
5/16			0.3125	4"	6.3/8	6	051020	—	—
		O	0.3161	4.1/8	6.1/2	6	—	—	055015
		P	0.3230	4.1/8	6.1/2	6	—	—	055016
21/64			0.3281	4.1/8	6.1/2	6	051021	—	—
		Q	0.3320	4.1/8	6.1/2	6	—	—	055017
		R	0.3390	4.1/8	6.1/2	6	—	—	055018
11/32			0.3437	4.1/8	6.1/2	6	051022	—	—
		S	0.3480	4.1/4	6.3/4	6	—	—	055019
		T	0.3580	4.1/4	6.3/4	6	—	—	055020
23/64			0.3594	4.1/4	6.3/4	6	051023	—	—
		U	0.3680	4.1/4	6.3/4	6	—	—	055021
3/8			0.3750	4.1/4	6.3/4	6	051024	—	—
		V	0.3770	4.3/8	7"	6	—	—	055022
		W	0.3860	4.3/8	7"	6	—	—	055023
25/64			0.3906	4.3/8	7"	6	051025	—	—
		X	0.3970	4.3/8	7"	6	—	—	055024
		Y	0.4040	4.3/8	7"	6	—	—	055025
13/32			0.4063	4.3/8	7"	6	051026	—	—
		Z	0.4130	4.5/8	7.1/4	6	—	—	055026
27/64			0.4219	4.5/8	7.1/4	6	051027	—	—
7/16			0.4375	4.5/8	7.1/4	6	051028	—	—
29/64			0.4531	4.3/4	7.1/2	6	051029	—	—
15/32			0.4687	4.3/4	7.1/2	6	051030	—	—
31/64			0.4844	4.3/4	7.3/4	6	051031	—	—
1/2			0.5000	4.3/4	7.3/4	6	051032	—	—
33/64			0.5156	4.3/4	8"	1	051033	—	—
17/32			0.5313	4.3/4	8"	1	051034	—	—
35/64			0.5469	4.7/8	8.1/4	1	051035	—	—
9/16			0.5625	4.7/8	8.1/4	1	051036	—	—
37/64			0.5781	4.7/8	8.3/4	1	051037	—	—
19/32			0.5937	4.7/8	8.3/4	1	051038	—	—
39/64			0.6094	4.7/8	8.3/4	1	051039	—	—
5/8			0.6250	4.7/8	8.3/4	1	051040	—	—
41/64			0.6406	5.1/8	9"	1	051041	—	—
21/32			0.6563	5.1/8	9"	1	051042	—	—
43/64			0.6719	5.3/8	9.1/4	1	051043	—	—
11/16			0.6875	5.3/8	9.1/4	1	051044	—	—
45/64			0.7031	5.5/8	9.1/2	1	051045 <sup>1)</sup>	—	—
23/32			0.7188	5.5/8	9.1/2	1	051046 <sup>1)</sup>	—	—
47/64			0.7344	5.7/8	9.3/4	1	051047 <sup>1)</sup>	—	—
3/4			0.7500	5.7/8	9.3/4	1	051048 <sup>1)</sup>	—	—
49/64			0.7656	6"	9.7/8	1	051049 <sup>1)</sup>	—	—
25/32			0.7813	6"	9.7/8	1	051050 <sup>1)</sup>	—	—
51/64			0.7969	6.1/8	10"	1	051051 <sup>1)</sup>	—	—
13/16			0.8125	6.1/8	10"	1	051052 <sup>1)</sup>	—	—
53/64			0.8281	6.1/8	10"	1	051053 <sup>1)</sup>	—	—
27/32			0.8438	6.1/8	10"	1	051054 <sup>1)</sup>	—	—
55/64			0.8594	6.1/8	10"	1	051055 <sup>1)</sup>	—	—
7/8			0.8750	6.1/8	10"	1	051056 <sup>1)</sup>	—	—
57/64			0.8906	6.1/8	10"	1	051057 <sup>1)</sup>	—	—

<sup>1)</sup> steam oxide

# TAPER LENGTH DRILL



d <sub>1</sub> Ø Inch	d <sub>1</sub> Ø Nr.	d <sub>1</sub> Ø letter	d <sub>1</sub> decimal Inch	l <sub>2</sub> Inch	l <sub>1</sub> Inch	Pack Qty	R51	R52	R55
29/32			0.9063	6.1/8	10"	1	051058	<sup>1)</sup> —	—
59/64			0.9219	6.1/8	10.3/4	1	051059	<sup>1)</sup> —	—
15/16			0.9375	6.1/8	10.3/4	1	051060	<sup>1)</sup> —	—
61/64			0.9531	6.3/8	11"	1	051061	<sup>1)</sup> —	—
31/32			0.9688	6.3/8	11"	1	051062	<sup>1)</sup> —	—
63/64			0.9844	6.3/8	11"	1	051063	<sup>1)</sup> —	—
1"			1.0000	6.3/8	11"	1	051100	<sup>1)</sup> —	—
1.1/64			1.0156	6.1/2	11.1/8	1	051101	<sup>1)</sup> —	—
1.1/32			1.0312	6.1/2	11.1/8	1	051102	<sup>1)</sup> —	—
1.3/64			1.0469	6.5/8	11.1/4	1	051103	<sup>1)</sup> —	—
1.1/16			1.0625	6.5/8	11.1/4	1	051104	<sup>1)</sup> —	—
1.5/64			1.0781	6.7/8	11.1/2	1	051105	<sup>1)</sup> —	—
1.3/32			1.0937	6.7/8	11.1/2	1	051106	<sup>1)</sup> —	—
1.7/64			1.1094	7.1/8	11.3/4	1	051107	<sup>1)</sup> —	—
1.1/8			1.1250	7.1/8	11.3/4	1	051108	<sup>1)</sup> —	—
1.9/64			1.1406	7.1/4	11.7/8	1	051109	<sup>1)</sup> —	—
1.5/32			1.1563	7.1/4	11.7/8	1	051110	<sup>1)</sup> —	—
1.11/64			1.1719	7.3/8	12"	1	051111	<sup>1)</sup> —	—
1.3/16			1.1875	7.3/8	12"	1	051112	<sup>1)</sup> —	—
1.13/64			1.2031	7.1/2	12.1/8	1	051113	<sup>1)</sup> —	—
1.7/32			1.2187	7.1/2	12.1/8	1	051114	<sup>1)</sup> —	—
1.15/64			1.2344	7.7/8	12.1/2	1	051115	<sup>1)</sup> —	—
1.1/4			1.2500	7.7/8	12.1/2	1	051116	<sup>1)</sup> —	—
1.5/16			1.3125	8.5/8	14.1/4	1	051120	<sup>1)</sup> —	—
1.3/8			1.3750	8.7/8	14.1/2	1	051124	<sup>1)</sup> —	—
1.7/16			1.4375	9.1/8	14.3/4	1	051128	<sup>1)</sup> —	—
1.1/2			1.5000	9.3/8	15"	1	051132	<sup>1)</sup> —	—
1.9/16			1.5625	9.5/8	15.1/4	1	051136	<sup>1)</sup> —	—
1.5/8			1.6250	9.7/8	15.5/8	1	051140	<sup>1)</sup> —	—
1.3/4			1.7500	10.1/2	16.1/4	1	051148	<sup>1)</sup> —	—

<sup>1)</sup> steam oxide