

## COMMERCIAL FAN-FORCED WALL HEATERS

# LFK SERIES



### APPLICATIONS:

Attics  
Basements  
Entryways  
Large Rooms  
Offices  
Remodels

#### **CONTEMPORARY DESIGN**

- Commercial grade steel grille designed to provide a sleek appearance and rugged use

#### **UNIFORM DISTRIBUTION OF WARMTH**

- Built-in fan delay switch energizes fan motor only after elements are heated, which prevents discharge of unheated air
- Integral double pole thermostat allows for easy adjustment of room temperature to maintain desired comfort level and a positive OFF to assure heater will not operate if not needed

#### **SAFETY STANDARDS COMPLIANT**


- Safety listed by Intertek (ETL) for use in the USA and Canada complying with ANSI/UL2021 and C22.2, NO. 56 Safety Standards
- Manual-reset thermal overheat protector disconnects power in the event of overheating due to accidental blockage

#### **DURABILITY AND EASY MAINTENANCE**

- All units have a permanently lubricated, totally enclosed fan motor, which creates long life and low maintenance, and gently distributes warmth throughout the area

Catalog Number	Voltage	Wattage	Phase	AMPS
LFK151F	120	1500	1	12.5
LFK204F	240/208	2000/1500	1	8.3/7.2
LFK303F	347	3000	1	8.6
LFK304F	240	3000	1	12.5
LFK306F	600	3000	3	5
LFK403F	347	4000	1	11.5
LFK404F	240/208	4000/3000	1	16.7/14.4
LFK406F	600	4000	3	6.7
LFK408F	208	4000	1	19.2
LFK483F	347	4800	1	13.8
LFK484F	240/208	4800/3600	1	20/17.3
LFK486F	600	4800	3	8
LFK4083F	208	4000	3	11.1
LFK487F	277/240	4800/3600	1	17.3/15
LFK488F	208	4800	1	23.1
LFK4883F	208	4800	3	13.3
Accessories				
LFKSM	Surface mounting frame for surface installations. 3-13/16" deep in northern white			
LFKS1	1" deep surface mounting frame for semi-recessed installation in northern white			
LFKS2	2" deep surface mounting frame for semi-recessed installation in northern white			
LFKSFCNW	14 gauge security front cover in northern white			

## DIMENSIONS

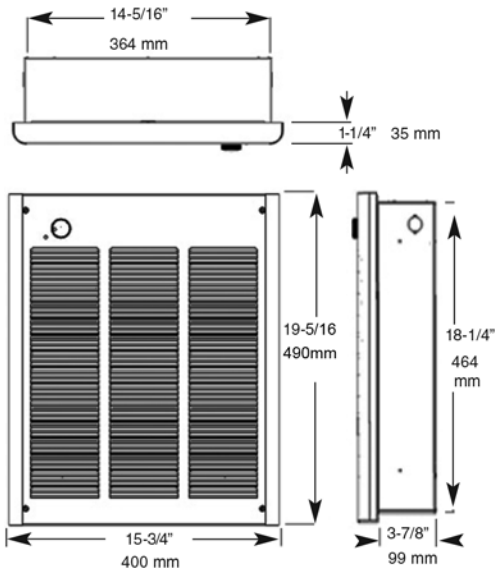

## MOUNTING LIMITATIONS

Do not install heater closer than 8" from floor or adjacent wall surface, behind towel rack or door, upside down or side up, in floor, ceiling or closet.



Conforms to ANSI/UL2021  
and CSA C22.2, No. 58