

Rittal – The System.

Faster – better – everywhere.

► TopTherm roof-mounted fans for TS 8 – SK 3149.410

Date : Jun 8, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



TopTherm roof-mounted fans for TS 8 – SK 3149.410

created: 08.06.2018 build on www.rittal.com/us-en

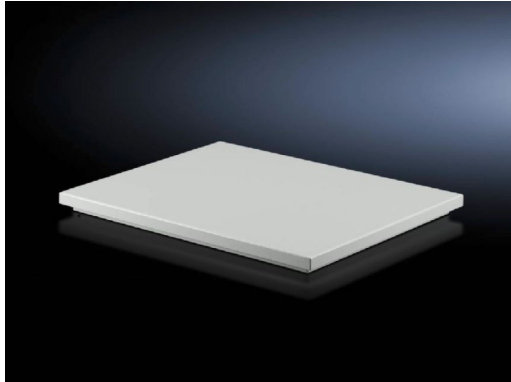

Discontinued article.

This item will be discontinued on: 30.04.2017 |||This item is being replaced by: 3139110

Product description

Description:	The active roof-mounted fans fit precisely onto the cut-outs for the small and medium TopTherm roof-mounted cooling unit output category.
Material:	Carbon steel, spray finished
Color:	RAL 7035
Protection category IP to IEC 60 529:	IP 43
Supply includes:	Unit ready for connection with built-in radial fan Sealing and assembly components

Product features

Air throughput (unimpeded air flow):	400 m ³ /h (235.4 cfm)
Unimpeded air flow (without filter mats):	
Unimpeded air flow (with filter mats):	
Rated operating voltage:	115 V, 1~, 50 Hz/60 Hz
Dimensions:	Height: 125 mm (4.9 ") Width: 550 mm (22 ") Depth: 370 mm (15 ")
Required mounting	Width: 475 mm (19 ")

cut-out:	Depth: 260 mm (10 ")
Temperature range:	Operation (environment): -10°C...+55°C
Rated power Pel:	At 50 Hz: 120 W At 60 Hz: 170 W
Rated current (max.):	At 50 Hz: 1.1 A At 60 Hz: 1.6 A
Noise pressure level:	At 50 Hz: 68 dB(A) At 60 Hz: 69 dB(A)
Packaging unit:	1 pc(s).
Weight/packaging unit:	10 kg
EAN:	4028177387119
Customs tariff number:	84145915
ETIM 6.0:	EC000320
ETIM 5.0:	EC000320
eCl@ss 8.0/8.1:	27180716
eCl@ss 7.0/7.1:	27180716
eCl@ss 6.0/6.1:	27180716
eCl@ss 5.1/5.1.4:	27180707
Product description (long):	SK TopTherm roof-mounted fan, 400 m ³ /h, 115 V, 1~, 50/60 Hz, WHD: 550x125x370 mm
Approvals	
Approvals:	Approval overview CSA
Certificates:	EAC
Declarations:	Declaration of conformity