

SHOWER MODULE DRAIN

» 827 & 828 SERIES

SPECIFICATION

Sioux Chief 827 or 828 series shower module drain shall be used where necessary in drainage systems. Shower drain shall have an outer locknut design with compression gasket connection for Sch. 40 ABS/PVC pipe. Snap-in strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005/CSA B125.2-05.

MATERIALS

Strainer: Stainless steel

Body, locknut, compression nut:

827 SERIES: Brass

828 SERIES: Glass-filled polypropylene

Washers: Rubber, polyethylene

Compression gasket: Elastomer

STRAINER LOAD RATING

300 lbs. (19 gauge)

STRAINER FREE AREA

3.25 in²

FLOW RATE*

4.5 GPM

DIMENSIONS

A: Connection 2" Sch. 40 compression gasket

B: Top diameter 4¹/₄"

C: Overall height 2"

* Flow rate at which water in drain area does not exceed 0.375"


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



827-2B



828-2

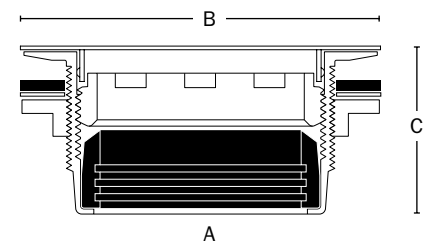

Choose Item Number

827-2B = Brass model

828-2 = Polypro model