


## Pfirst Series™ Kitchen Faucet

- |   |   |
|---|---|
| G134-5000 Finish(PC) <input type="checkbox"/> | G134-6000 Finish(PC) <input type="checkbox"/> |
| G134-500S Finish(SS) <input type="checkbox"/> | G134-600S Finish(SS) <input type="checkbox"/> |
|   | G134-7000 Finish(PC) <input type="checkbox"/> |
|   | G134-700S Finish(SS) <input type="checkbox"/> |

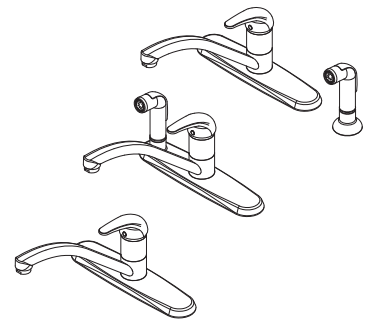

## Specifications

### Features

- 1.8 GPM Flow Rate
- Includes Metal Supply Nuts
- 3-Hole Installation (500\* & 600\* Only)
- 4-Hole Installation (700\* Only)
- Swivel Spout
- Includes Matching Side Spray (600S\* & 700S Only)
- Chrome Spray (6000 & 7000 Only)
- Stainless Steel Side Spray (600S & 700S Only)
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

