


Fork Terminals

- Fork terminals enable easy installation because the mounting screw does not have to be completely removed
- Brazed-seam barrel is serrated for high pull-out value
- Terminal is high-conductivity electrolytic copper, electro-tin plated. Insulation is colour-coded
- Vinyl-insulated fork terminals have extra-long PVC insulation sleeve for protection and stress relief at wire's flex point


Nylon-Insulated Forks

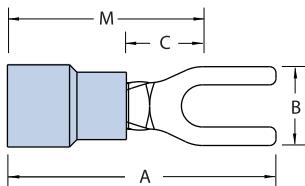

Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)
						A	B	C	M	
RA18-6F	100	22-16	0.136	#6	ERG4001	0.83	0.25			0.02
RA1103	1,000					0.83	0.25			
RA18-8F	100					0.86	0.31	0.25	0.71	
RA1123	1,000					0.86	0.31			
RA18-10F	100					0.86	0.31			
RA1153	1,000					0.86	0.31			
RA18-14F	100					0.95	0.44	0.31	0.70	
RA1163	1,000					0.95	0.44			
RB14-6F	100	18-14	0.162	#6	ERG4001	0.87	0.31			0.03
RB1113	1,000					0.87	0.31			
RB14-8F	100					0.87	0.31	0.25	0.71	
RB1123	1,000					0.87	0.31			
RB14-10F	100					0.87	0.38			
RB1153	1,000					0.87	0.38			
RB14-14F	100					0.95	0.44	0.28	0.74	
RB1163	1,000					0.95	0.44			
RB1103	1,000					0.74	0.28	0.16	0.60	
RB1124	1,000					0.95	0.31	0.25	0.79	
RB1154	1,000					0.95	0.31			
RC10-6F	50	12-10	0.210	#6	ERG4001	0.97	0.31			0.04
RC1113	500					0.97	0.31			
RC10-8F	50					1.00	0.37	0.81		
RC1123	500					1.00	0.37			
RC10-10F	50					1.00	0.37	0.27		
RC1153	500					1.00	0.37			
RC10-14F	50					1.12	0.50	0.86		
RC1163	500					1.12	0.50			
RC1124	500					1.10	0.37	0.91		
RC1154	500					1.10	0.37			

Add suffix "X" for wider wire entry to accommodate heavy wall insulation

Nylon-Insulated Locking Forks

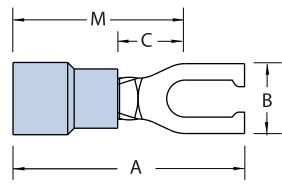


Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)
						A	B	C	M	
RA18-6FL	100	22-16	0.136	#6	ERG4001	0.86	0.25			0.02
RA2213	1,000					0.86	0.25			
RA18-8FL	100					0.88	0.31			
RA2243	1,000					0.88	0.31			
RA18-10FL	100					0.90	0.29			
RA2253	1,000					0.90	0.29			
RB14-6FL	100					0.87	0.31			
RB2213	1,000					0.87	0.31			
RB2214	1,000					0.95	0.31			
RB14-8FL	100					0.98	0.31			
RB2233	1,000					0.98	0.31			
RB14-10FL	100	18-14	0.162	#10	ERG4001	0.98	0.31			0.03
RB2253	1,000					0.98	0.31			
RB2254	1,000					0.98	0.31			
RC10-6FL	50		0.210	#6	ERG4001	0.97	0.31			0.04
RC2203	500					1.07	0.31			
RC2204	1,000					1.07	0.31			
RC10-8FL	50					1.00	0.31			
RC2213	500					1.00	0.31			
RC10-10FL	50					1.00	0.37			
RC2223	500					1.00	0.37			
RC2224	500					1.10	0.37			
RC10-14FL	50					1.12	0.50			
RC2233	500					1.12	0.50			


Add suffix "X" for wider wire entry to accommodate heavy wall insulation

Fork Terminals

Nylon-Insulated Forks — Flanged Tongue

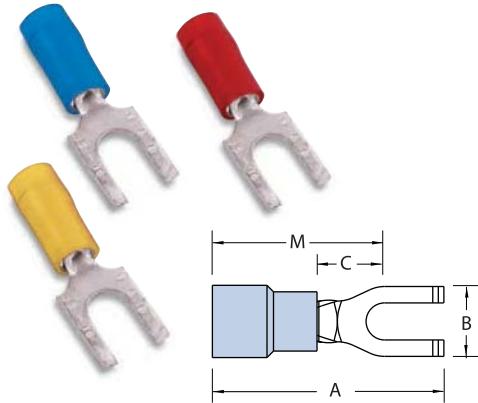

Vinyl-Insulated Forks


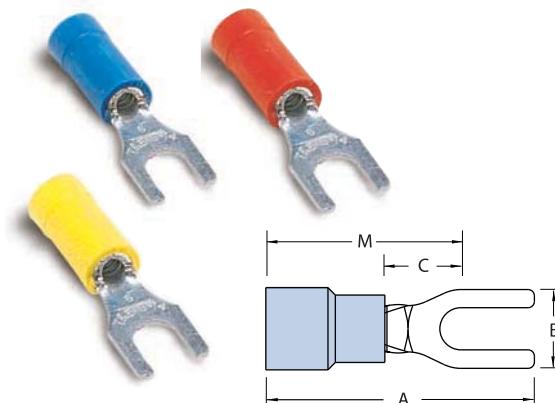


Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)
						A	B	C	M	
RA18-6FS	100	22-16	0.136	#6	ERG4001	0.75	0.28	0.16	0.62	0.02
RA1203	1,000			#6		0.75	0.28	0.16	0.62	
RA18-8FS	100			#8		0.89	0.31	0.23	0.65	
RA1223	1,000			#8		0.89	0.31	0.23	0.65	
RA18-10FS	100			#10		0.93	0.38	0.26	0.68	
RA1253	1,000			#10		0.93	0.38	0.26	0.68	
RB14-6FS	100	18-14	0.162	#6	ERG4001	0.74	0.28	0.16	0.60	0.03
RB1203	1,000			#6		0.74	0.28	0.16	0.60	
RB14-8FS	100			#8		0.89	0.31	0.23	0.66	
RB1223	1,000			#8		0.89	0.31	0.23	0.66	
RB14-10FS	100			#10		0.94	0.38	0.27	0.69	
RB1253	1,000			#10		0.94	0.38	0.27	0.69	
RB1204	1,000	12-10	0.190	#6	ERG4001	0.79	0.28	0.16	0.67	0.04
RB1224	1,000			#8		0.94	0.31	0.23	0.71	
RC10-8FS	50	12-10	0.210	#8	ERG4001	0.97	0.34	0.23	0.73	0.04
RC1223	500			#8		0.97	0.34	0.23	0.73	
RC10-10FS	50			#10		1.00	0.38	0.26	0.74	
RC1253	500			#10		1.00	0.38	0.26	0.74	
RC1224	1,000	0.250	#8	1.08	ERG4001	0.34	0.23	0.80	0.04	
RC1254	1,000			#10		1.12	0.38	0.26	0.86	


Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)	
						A	B	C	M		
18RA-6F	100	22-16	0.150	#6	ERG4001	0.94	0.25	0.27	0.81	0.02	
RA1167	1,000			#6		0.94	0.25				
18RA-8F	100			#8		0.97	0.31				
RA1147	1,000			#8		0.97	0.31				
18RA-10F	100			#10		0.97	0.31				
RA1157	1,000			#10		0.97	0.31				
14RB-6F	100	18-14	0.170	#6	ERG4001	0.97	0.31	0.27	0.81	0.03	
RB647	1,000			#6		0.97	0.31				
14RB-6FS	100			#6		0.89	0.30	0.25	0.75		
14RB-8F	100			#8		0.97	0.31				
RB657	1,000			#8		0.97	0.31				
14RB-10F	100			#10		0.97	0.31				
RB1157	1,000	12-10	0.210	#10	ERG4001	0.97	0.31	0.38	0.89	0.04	
14RB-14F	100			1/4 in.		1.11	0.44				
RB1717	1,000			1/4 in.		1.11	0.44				
10RC-6F	50			#6		1.09	0.31	0.27	0.90	0.04	
RC1337	500			#6		1.09	0.31				
10RC-8F	50			#8		1.09	0.38				
RC1147	500			#8		1.09	0.38				
10RC-10F	50			#10		1.09	0.38				
RC1157	500			#10		1.09	0.38				
10RC-14F	50	0.250	#8	1/4 in.	ERG4001	1.15	0.50	0.37	1.15	0.04	
RC1167	500			#10		1.15	0.50				

Fork Terminals

Vinyl-Insulated Forks – Expanded Insulation

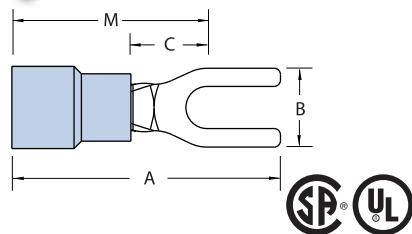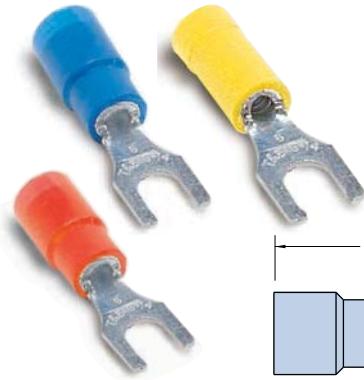

Non-Insulated Locking Fork Terminals

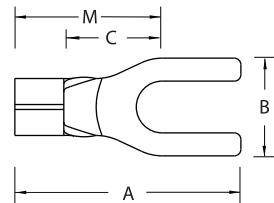


Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)
						A	B	C	M	
18RA-6FX	100	22-16	0.170	#6	ERG4001	0.94	0.25			0.02
RA1167-170	1,000			#6						
18RA-8FX	100			#8						
RA1147-170	1,000			#8						
18RA-10FX	100			#10						
RA1157-170	1,000			#10						
14RB-6FX	100			#6						
RB647-200	1,000			#6						
14RB-8FX	100			#8						
RB657-200	1,000			#8						
14RB-10FX	100			#10						
RB1157-200	1,000			#10						
10RC-8FX	50	18-14	0.200	#8	ERG4001					0.03
RC1147-250	500			#8						
10RC-10FX	50			#10						
RC1157-250	500			#10						
10RC-14FX	50	12-10	0.250	1/4 in.		1.11	0.38			0.04
						1.17	.50	.37		


Cat. No.	Pkg. Qty.	Wire Range	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)
					A	B	C	M	
A18-6F	100	22-16	#6	ERG4002	0.72	0.25			0.02
A116	1,000		#6		0.72	0.25			
A18-8F	100		#8		0.75	0.31			
A114	1,000		#8		0.75	0.31			
A18-10F	100		#10		0.75	0.31			
A115-TB	1,000		#10		0.75	0.31			
B14-6F	100		#6		0.75	0.31			
B64	1,000		#6		0.75	0.31			
B19	1,000		#6		0.66	0.25	0.13	0.50	0.03
B14-8F	100		#8		0.75	0.31			
B65-TB	1,000		#8		0.75	0.31			
B14-10F	100		#10		0.75	0.31			
B115	1,000		#10		0.75	0.31			
B14-14F	100	18-14	1/4 in.	ERG4002	0.90	0.44	0.38	0.68	0.04
C10-6F	50		#6		0.77	0.31			
C133	500		#6		0.77	0.31			
C10-8F	50		#8		0.82	0.38			
C114	500		#8		0.82	0.38			
C10-10F	50		#10		0.82	0.38			
C115	500		#10		0.82	0.38			
C10-14F	50		1/4 in.		0.98	0.50			
C116-TB	500		1/4 in.		0.98	0.50	0.37	0.73	

Fork Terminals

Vinyl-Insulated Locking Forks – Expanded Insulation




Vinyl-Insulated Locking Forks



Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)	
						A	B	C	M		
18RA-6FLX	100	22-16	0.170	#6	ERG4001	0.97	0.25	0.25	0.02	0.02	
RA2217-170	1,000						#6				
18RA-8FLX	100						#8				
18RA-10FLX	100					0.97	0.29	0.29	0.03		
RA2257-170	1,000						#10				
14RB-6FLX	100						#6				
RB2207-200	1,000						#6				
RB2217-200	1,000						#6				
14RB-8FLX	100						#8				
RB2237-200	1,000						#8				
14RB-10FLX	100	18-14	0.200	#10	ERG4001	0.97	0.31	0.81	0.03	0.03	
RB2257-200	1,000						#10				
10RC-6FLX	50						#6				
RC2207-250	500						#6				
10RC-8FLX	50						#8				
10RC-10FLX	50	12-10	0.250	#10	ERG4001	1.07	0.31	0.27	0.04	0.04	
RC2227-250	500						#10				
10RC-14FLX	50						#10				
						1.10	0.37	0.91	0.04		
							#10				
						1.22	0.50	0.32	0.96		

Cat. No.	Pkg. Qty.	Wire Range	Max. Ins. (in.)	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)	
						A	B	C	M		
18RA-6FL	100	22-16	0.150	#6	ERG4001	0.97	0.25	0.25	0.02	0.02	
RA2217	1,000						#6				
RA2227	1,000						#6				
18RA-8FL	100					0.97	0.29	0.29	0.03		
RA2247	1,000						#8				
18RA-10FL	100						#8				
RA2257	1,000					0.97	0.31	0.29	0.03		
14RB-6FL	100						#6				
RB2207	1,000						#6				
RB2217	1,000					1.09	0.37	0.29	0.04		
14RB-8FL	100						#8				
RB2237	1,000						#8				
14RB-10FL	100	18-14	0.170	#10	ERG4001	1.09	0.37	0.29	0.04	0.04	
RB2257	1,000						#10				
10RC-6FL	50						#6				
RC2207	500					1.09	0.31	0.27	0.04		
10RC-8FL	50						#8				
RC2217	500	12-10	0.220	#10	ERG4001	1.09	0.37	0.29	0.04	0.04	
10RC-10FL	50						#10				
RC2227	500						#10				
10RC-14FL	50					1.09	0.49	0.49	0.04		
RC2237	500						#10				

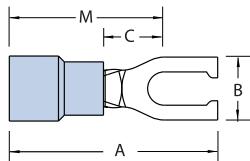

Cat. No.	Pkg. Qty.	Wire Range	Bolt Hole	Rec. Tool	Dimensions (in.)				Stock Thick. (in.)	
					A	B	C	M		
A18-6FL	100	22-16	#6	ERG4002	0.75	0.25	0.29	0.59	0.02	
A221	1,000					#6				
A18-8FL	100					#8				
A224	1,000				0.75	0.29	0.29	0.59		
A18-10FL	100					#10				
A225	1,000					#10				
B14-6FL	100	18-14	#6	ERG4002	0.75	0.25	0.29	0.27	0.03	
B220	1,000					#6				
B14-8FL	100					#8				
B223	1,000				0.85	0.31	0.37	0.66		
B14-10FL	100					#10				
B225	1,000				ERG4002	0.85	0.37	0.49	0.04	
C10-6FL	50					#6				
C220-TB	500					#6				
C10-8FL	50					#8				
C221	500					#8				
C10-10FL	50	12-10	#10	ERG4005	0.85	0.31	0.37	0.66	0.04	
C222-TB	500					#10				
C10-14FL	50					#10				