

# Windham™ Comfort Height®

Pro Force® Toilet 403082-RA

#### **Features**

- Two-piece design.
- Elongated bowl offers added room and comfort.
- Luxury Height.
- 1.28 gpf (4.8 lpf).
- Pro Force® flushing technology.

#### Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.

### **Recommended Products/Accessories**

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat

K-5588 Purefresh® Elongated Toilet Seat

K-4108 C3®-230 Elongated cleansing toilet seat

K-5420 Low-Profile Bolt Caps

K-23726 Drain treatment

## **Included Components**

Product consists of:

404551-RA Toilet tank

403315 Elongated toilet bowl

Additional Components:

Bolt caps (pair)

Tank cover

tank hardware accessory pack

trip lever

**CSA B651** 

OBC

## Codes/Standards

ASME A112.19.2/CSA B45.1

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

# STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.




nis product nas een discontinued





# Windham™ Comfort Height®

Pro Force® Toilet 403082-RA

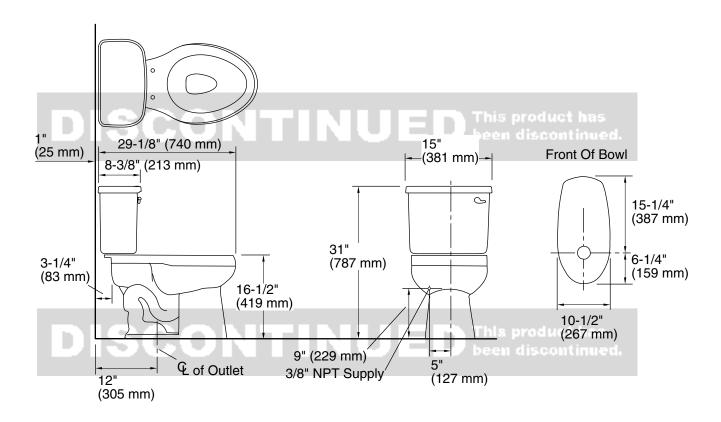

#### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor Bowl shape: Elongated

Flush type: Gravity siphon rim jet

Trap passageway: 2" (51 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 8" x 10" (203 mm x 254 mm)

12" (305 mm) Rough-in: 5-1/2" (140 mm) Seat-mounting

holes:

#### **Notes**

Install this product according to the installation

Measure your actual product for roughing-in

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.