



**ALL PURPOSE**

# **PAINTERS PREFERRED®**

**Acrylic Latex Caulk**



White Lightning® Painter's Preferred® is an economical general purpose acrylic latex caulk suitable for sealing interior/exterior cracks and joints. Ideal for use on doors, windows and trim. White Lightning® Painter's Preferred® seals cracks between drywall, wood, and glass.

- Easy Application
- Cured Sealant is Mold and Mildew Resistant




PAINTABLE



WATER CLEANUP

PART #	UPC	Color	SIZE
W13000010	0-23275-30010-1	White	10 fl oz

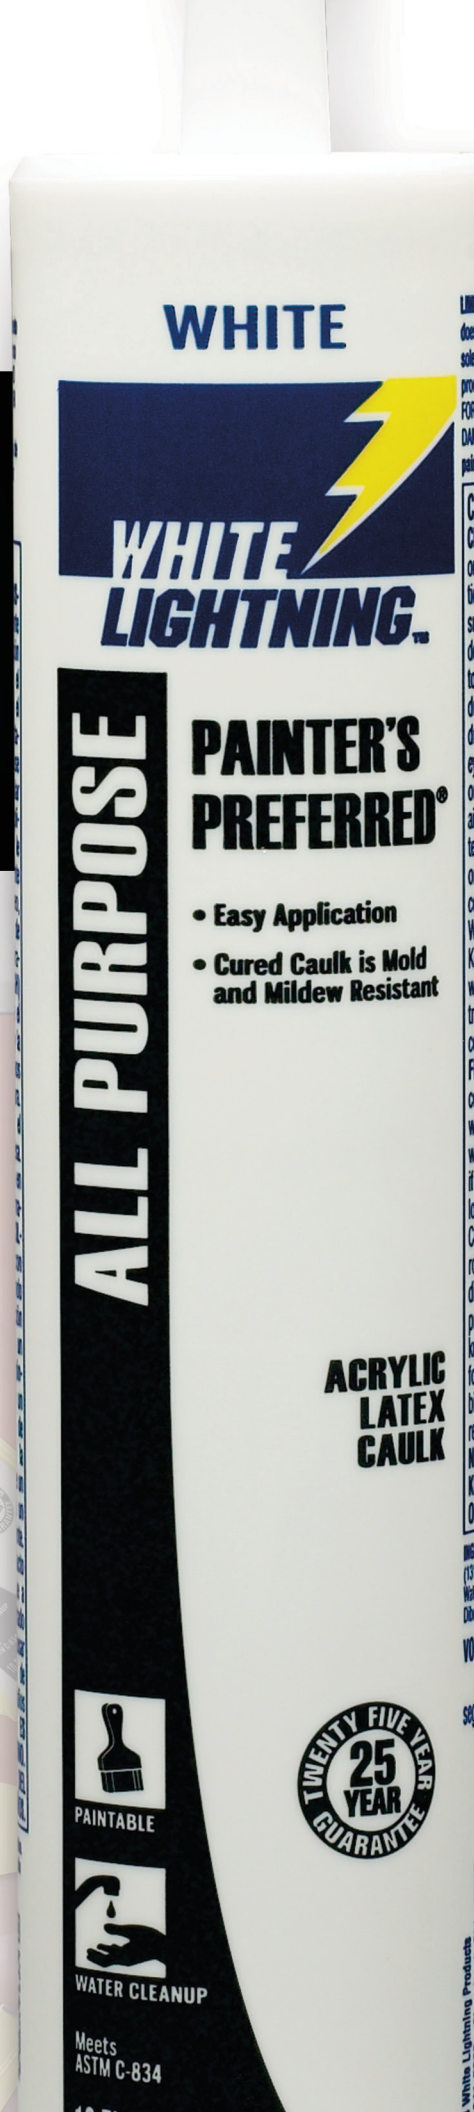

**WHITE**



**ALL PURPOSE**

## **PAINTER'S PREFERRED®**

- Easy Application
- Cured Caulk is Mold and Mildew Resistant

**ACRYLIC LATEX CAULK**



PAINTABLE



WATER CLEANUP



Meets ASTM C-834

**Product Description:**

White Lightning® Painter's Preferred® is an economical general purpose acrylic latex caulk suitable for sealing interior/exterior cracks and joints. Ideal for use on doors, windows and trim. White Lightning® Painter's Preferred® seals cracks between drywall, wood, and glass..

**Physical Properties:**

**Type:** Acrylic

**Colors:** White

**Shelf Life:** 24 Months

**Flash Point:** n/a (water based)

**Flammability:** n/a (water based)

**Full Cure Time:** 7 to 14 days at 75° F

**Tack Free Time:** 5-7 Minutes at 75° F

**Application Temperature:** above 40° F

**Service Temperature:** -30° F to 180° F

**Vehicle:** Water

**Solids by Weight:** 82% +/- .2%

**Weight/Gallon:** 13.71 lbs/gal

**Painting:** Paintable

**Primers:** Not required

**Mildew Resistance:** Good

**Water Resistance:** Good

**Odor:** Low

**Shrinkage:** Low/Moderate

---

**Performance Data:**

**Joint Size:** 1/8" x 1/8" to 1/2" x 1/4"

**Freeze-Thaw Stability:** Passes Through 5 Cycles

**Shelf Life:** 24 Months

**Clean Up:** Water, promptly clean tools and excess caulk with water or a damp cloth.

**Flexibility:** Good

**Linear Coverage** 10oz cartridge 24ft at 1/4" wide by 1/4" deep bead

**Painting:** A minimum of 2-4 hours dry time is required before painting with latex or oil based paint. Allow extra dry time during periods of high humidity and/or cool temperatures.

**ASTM:** Meets ASTM Specification C-834, Grade NF

**Application:**

1. Remove all existing caulk
2. Clean thoroughly to remove all loose material, grease, dirt, oil, wax, loose paint, dust and soap film.
3. Remove mold/mildew with bleach (4:1 mix, water to bleach), and detergent that does not contain ammonia. Rinse surfaces and allow to dry.

• **10oz cartridge**

- Cut cartridge tip 45° angle.
- Load cartridge into caulk gun.
- Squeeze trigger to start flow of caulk and work caulk into joint.
- Smooth caulk with proper tool.

**Clean Up:**

Water; promptly clean tools and excess caulk with water or a damp cloth.

**Cautions:**

See MSDS

**Limitations:**

For best results, apply at temperatures above 40° F and allow 24 hours to cure before exposing to moisture. Do not apply to frozen or frost covered surfaces. Not for use below grade, on aquariums or for marine use below the water line

**LIMITED WARRANTY:**

LIMITED WARRANTY: For 25 years from date of purchase, if when applied according to label directions within one year from date of purchase, if this product fails to perform in accordance with the specifications set forth on this label, as your sole remedy, upon proof of purchase, we will replace the product at no cost or refund the original purchase price. Labor or costs associated with labor not included. Applies to single family house only. This warranty is made to the original residential consumer purchaser and is not transferable. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY, WHICH ARE ALL DISCLAIMED AND/OR LIMITED IN DURATION TO THE EXTENT PERMITTED BY LAW. WE SHALL NOT BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS) FROM ANY CAUSE WHATSOEVER.

**For more information please call or write:**

---

White Lightning® Products | 101 Prospect Ave. NW | Cleveland, OH 44115  
1-800-241-5295 Option 1 Customer Service | 1-800-241-5295 Option 2 Technical Service  
[www.wlcaulk.com](http://www.wlcaulk.com)

PAINTER'S PREFERRED