


M-10017 1

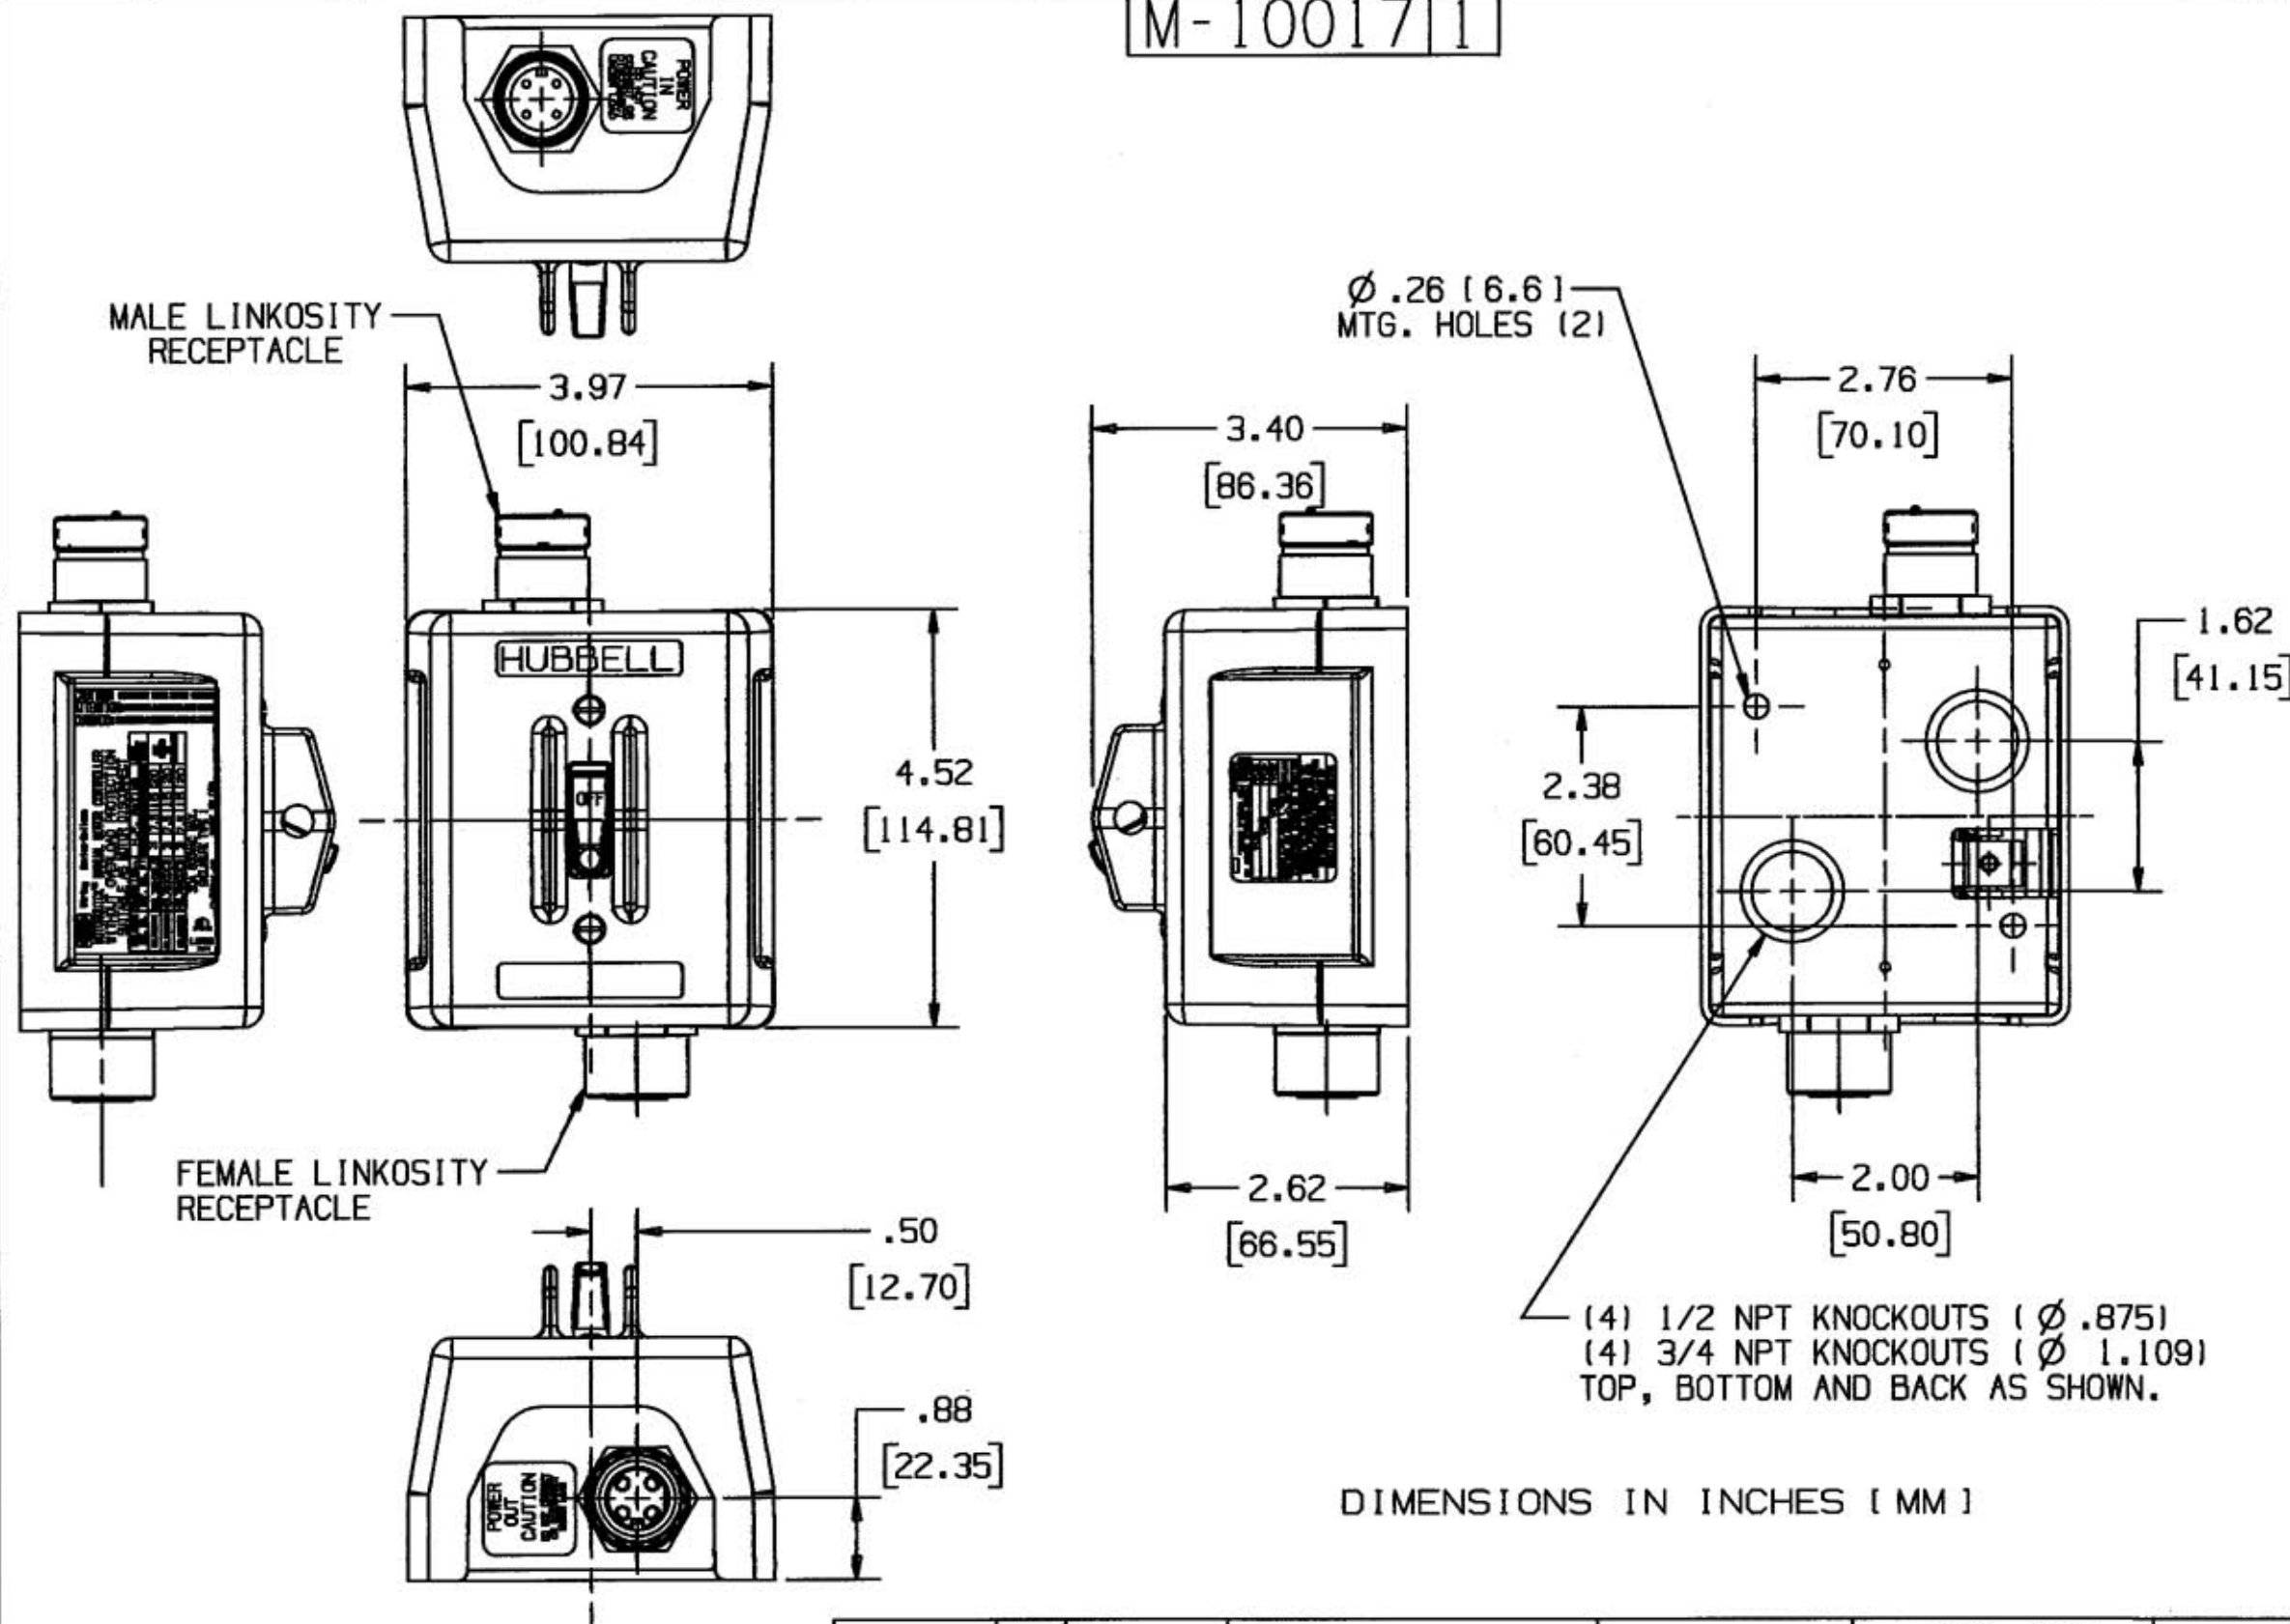

DIMENSIONS IN INCHES [MM]

CATALOG NUMBER	PHASE	GENERAL RATING	H.P. RATINGS				TERM. MAX. CAP. & WIRE INFO.	INSUL. STRIP IN. [MM]		TERMINAL TORQUE LB.IN. [Nm]
			120V AC	240V AC	480V AC	600V AC		SIDE WIRE	BACK WIRE	
HBL1389MQR2	3 Ø	30A 600VAC	3	7.5	15	20	#10 AWG CU ONLY	1-1/4 [32]	5/8 [16]	20 [2.4]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BOX FRAME	STEEL	GALVANIZED
GROUND SCREW	STEEL	GREEN
SWITCH ASSY	30A DISC.	2-POLE OR 3-POLE
SW. MTG SCREW (2)	STEEL	ZINC PLATE
BOX COVER	THERMOPLASTIC	BLACK
COVER MTG. SCREW (2)	STEEL	NICKEL PLATE
LINKOSITY RECEP. FEMALE		
LINKOSITY RECEP. MALE		

INITIAL RELEASE DCN#12883	WRV	1/06
SYM	REVISIONS	APP DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE MOTORQUICK LINKOSITY NEMA 1 SWITCH POWER IN & POWER OUT

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ± 1/84	DR. BY WRV	APP. BY TLS
DECIMALS ± .005	TR. BY	SCALE 1:2
ANGLES ± 2°	CHK'D BY TLS	DATE 1/06