

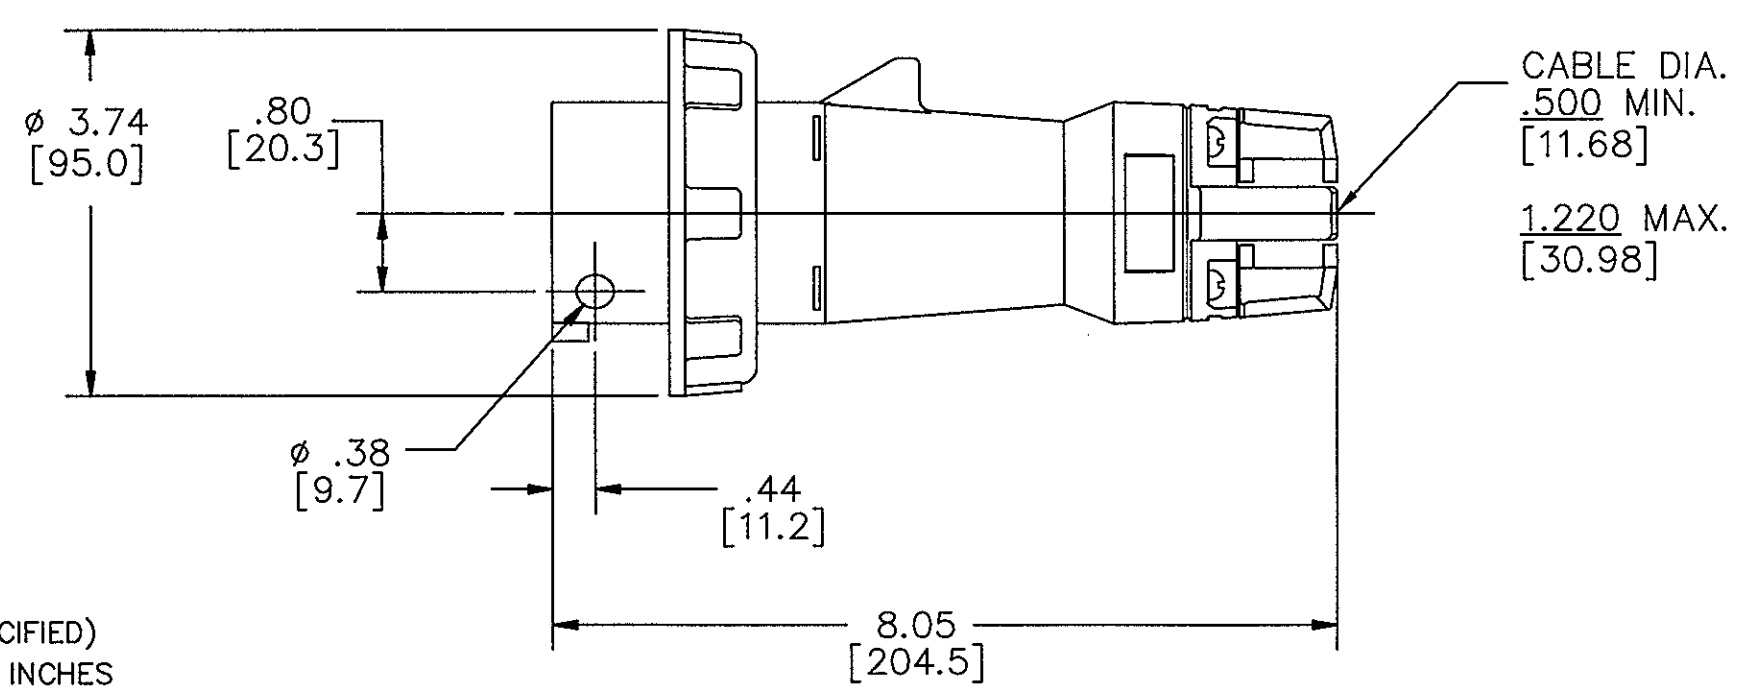


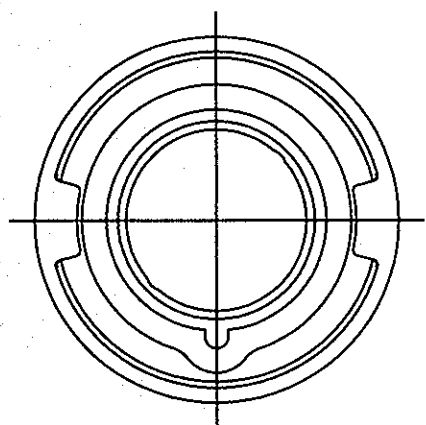

NOTES: (UNLESS OTHERWISE SPECIFIED)  
1) DIMENSION FORMAT IS: INCHES [mm]

| LIST OF PARTS |              |        |
|---------------|--------------|--------|
| DESCRIPTION   | MATERIAL     | FINISH |
| HOUSING       | SEE TABLE    |        |
| GASKET        | RUBBER       |        |
| LOCK RING     | POLYESTER    |        |
| INTERIOR      | THERMOSET    |        |
| PINS          | BRASS        |        |
| TERM.SCREWS   | STAIN. STEEL |        |
| GLAND CAP     | POLYESTER    |        |
| GLANDS        | RUBBER       |        |
| CLAMPS        | POLYESTER    |        |
| CLAMP NUTS    | BRASS        | NICKEL |
| ASS'Y SCRS.   | STAIN. STEEL |        |
|               |              |        |
|               |              |        |
|               |              |        |

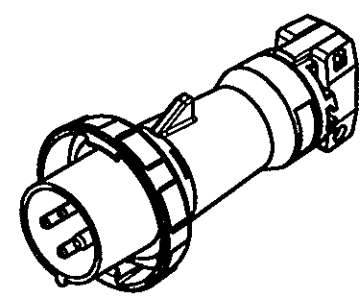

CATALOG NO. HBL430P9W  
(NOT SHOWN TO SCALE)

WHD 3/11/16

|     |                                                                                                                                   |     |          |
|-----|-----------------------------------------------------------------------------------------------------------------------------------|-----|----------|
| 6   | ADDED ALL HBLs CAT. NO.s. ADDED ISO VIEW TO INDICATE EMBEDDED SOLID MODEL IN DRAWING Ø.500 MIN CABLE SIZE WAS Ø.375 PER DCN 21767 | WHD | 01/26/16 |
| 5   | ADDED CAT. NO. HBL430P6V02 AND SPECS. TO TABLE. PER DCN 18867 DDL                                                                 | CAC | 05/30/12 |
| SYM | REVISIONS                                                                                                                         | APP | DATE     |

|                                                                                                     |  |                                                                                                                         |  |
|-----------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------|--|
| THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE |  |                                                                                                                         |  |
| TITLE 30A & 32A 3 POLE 4 WIRE PIN & SLEEVE PLUGS                                                    |  |                                                                                                                         |  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED<br>.XX = ±.01<br>.XXX = ±.005<br>ANGLES = ±2°                 |  | WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT<br>DR. BY CAC APP. BY<br>TR. BY SCALE 1/2<br>CHK. BY DATE 1/6/99 |  |

| CAT NO.     | CONFIGURATION | RATING                        | HOUSING |          | CAT. NO.    | CONFIGURATION | RATING              | HOUSING |          |
|-------------|---------------|-------------------------------|---------|----------|-------------|---------------|---------------------|---------|----------|
|             |               |                               | COLOR   | MATERIAL |             |               |                     | COLOR   | MATERIAL |
| HBL432P3W   |               | 30A<br>380-440VAC             | RED     | NYLON    | HBL430P7WR  |               | 30A 3Ø<br>480VAC    | RED     | NYLON    |
| HBLS432P3W  |               | 32A<br>380V-50HZ<br>440V-60HZ | RED     | PBT      | HBL430P7W   |               |                     |         |          |
| HBL430P5W   |               | 30A 3Ø<br>600VAC              | BLACK   | NYLON    | HBL430P7V05 |               | 30A 3Ø<br>480VAC    | RED     | PBT      |
| HBL430P5WR  |               |                               | BLACK   | PBT      | HBLS430P7W  |               |                     |         |          |
|             |               |                               |         |          | HBL430P9WR  |               | 30A 3Ø<br>250VAC    | BLUE    | NYLON    |
|             |               |                               |         |          | HBL430P9W   |               |                     |         |          |
| HBL432P6W   |               | 30A<br>380-415VAC             | RED     | NYLON    | HBL430P9W   |               | 30A 3Ø<br>250VAC    | BLUE    | PBT      |
| HBLS430P6W  |               | 32A<br>380V-415VAC            | RED     | PBT      | HBLS430P9W  |               | 32A 3Ø<br>250VAC    |         |          |
|             |               |                               |         |          | HBL430P9V04 |               | 30A 3Ø<br>250VAC    | BLUE    | PBT      |
| HBL430P6V02 |               | 30A<br>380-415VAC             | RED     | PBT      | HBL430P12W  |               | 30AMP<br>125/250VAC | ORANGE  | NYLON    |
|             |               |                               |         |          | HBLS430P12W |               |                     | ORANGE  | PBT      |