


M-6096 7

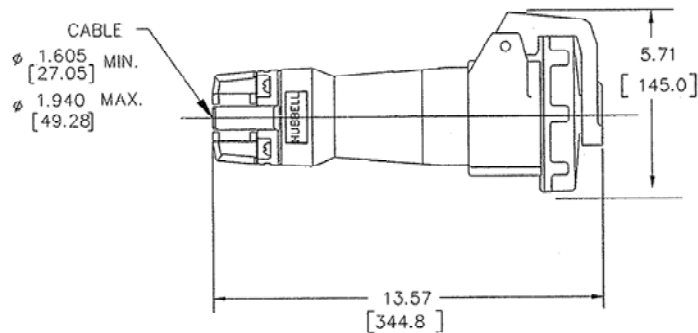

CAT NO.	CONFIGURATION	RATING	HOUSING		CAT. NO.	CONFIGURATION	RATING	HOUSING	
			MATERIAL	COLOR				MATERIAL	COLOR
					HBL5100C7W		100A 3ØY 277/480 VAC	NYLON	RED
					HBL5100C8V0DC		100 A 400 VDC	PBT	RED
					HBL5100C9W		100A 3ØY 120/208 VAC	NYLON	BLUE
HBL5100C5W		100A 3ØY 347/600 VAC	NYLON	BLACK					
HBL5125C6W		125 A 220/380 VAC 240/415 VAC	NYLON	RED					

NOTES: (UNLESS OTHERWISE SPECIFIED)

1) TOLERANCES ARE:
 DECIMALS ± .03
 ANGLES ± 2°

2) DIMENSIONS ARE INCHES
 [MILLIMETERS]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	SEE TABLE	
INTERIOR	THERMOSET	
SLEEVES	BRASS	
INSERT SPRINGS	BERR COPPER	SILVER
TERM. SCRS.	STAIN. STEEL	
COVER	POLYESTER	
COV. SCR.	BRASS	NICKEL
COV. SPR.	STAIN. STEEL	
GASKET	NEOPRENE	
DISC	POLYCARBONATE	
ARM	POLYESTER	
HINGE PIN	STAIN. STEEL	
HINGE SPR.	STAIN. STEEL	
GLAND CAP	POLYESTER	
GLANDS	NEOPRENE	
CLAMPS	POLYESTER	
CLAMP NUTS	BRASS	NICKEL
ASS'Y SCRS	STAIN. STEEL	

7	ADDED POLARITY TO HBL5100C8V0DC, PER DCN16648 MYA	TLS	5/11/10
6	ADDED CAT. HBL5100C8V0DC PER DCN 16502 SPN TLS	MJM	4/13/10
5	REDRAWN ON CAD WITH CHANGES, ADDED "HOUSING" AND "COMMENTS" COLUMNS TO TABLE, "& 125A TO DWG TITLE AND NOTES 1 & 2, IN TABLE, ADDED 240VAC TO CAT NO HBL5125C6W AND "A" WAS "AMP" IN LIST OF PARTS, "SEE TABLE" WAS "NYLON" AND "NEOPRENE" WAS "RUBBER" IN (2) PLACES, "CABLE Ø.1.065[27.05] MIN. Ø.1.940[49.27] MAX" WAS "CABLE DIA.1.180/28.57 MM MIN.1940 48.27]MM MAX" "Ø" WAS "DIA." AND "(XX.X)" WAS "MM". SUPERSEDES DRAWING DATED 5/9/80 PER DCN #12944. JMN	DJP	6/28/06

SYM REVISIONS APP DATE

THE DESIGN AND DIMENSIONS OF THE
 PRODUCT SHOWN ON THIS DRAWING ARE
 SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 100A & 125A 4 POLE 5 WIRE
 PIN AND SLEEVE
 CONNECTORS

TOLERANCES UNLESS
 OTHERWISE SPECIFIED
 FRACTIONS 1/16, 1/8, 3/16, 1/2, 3/4
 DECIMALS .005
 ANGLES 2°

WIRING DEVICE-KELLEMS
 HUBBELL INCORPORATED
 BRIDGEPORT, CT

DR. BY MJK APP. BY DJP
 TR. BY JMN SCALE NONE
 CHK'D BY DJP DATE 6/28/06

CODE 74545

DIMENSION SHEET FOR CAT. NO.

SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-6096

7