M-8933 | 2

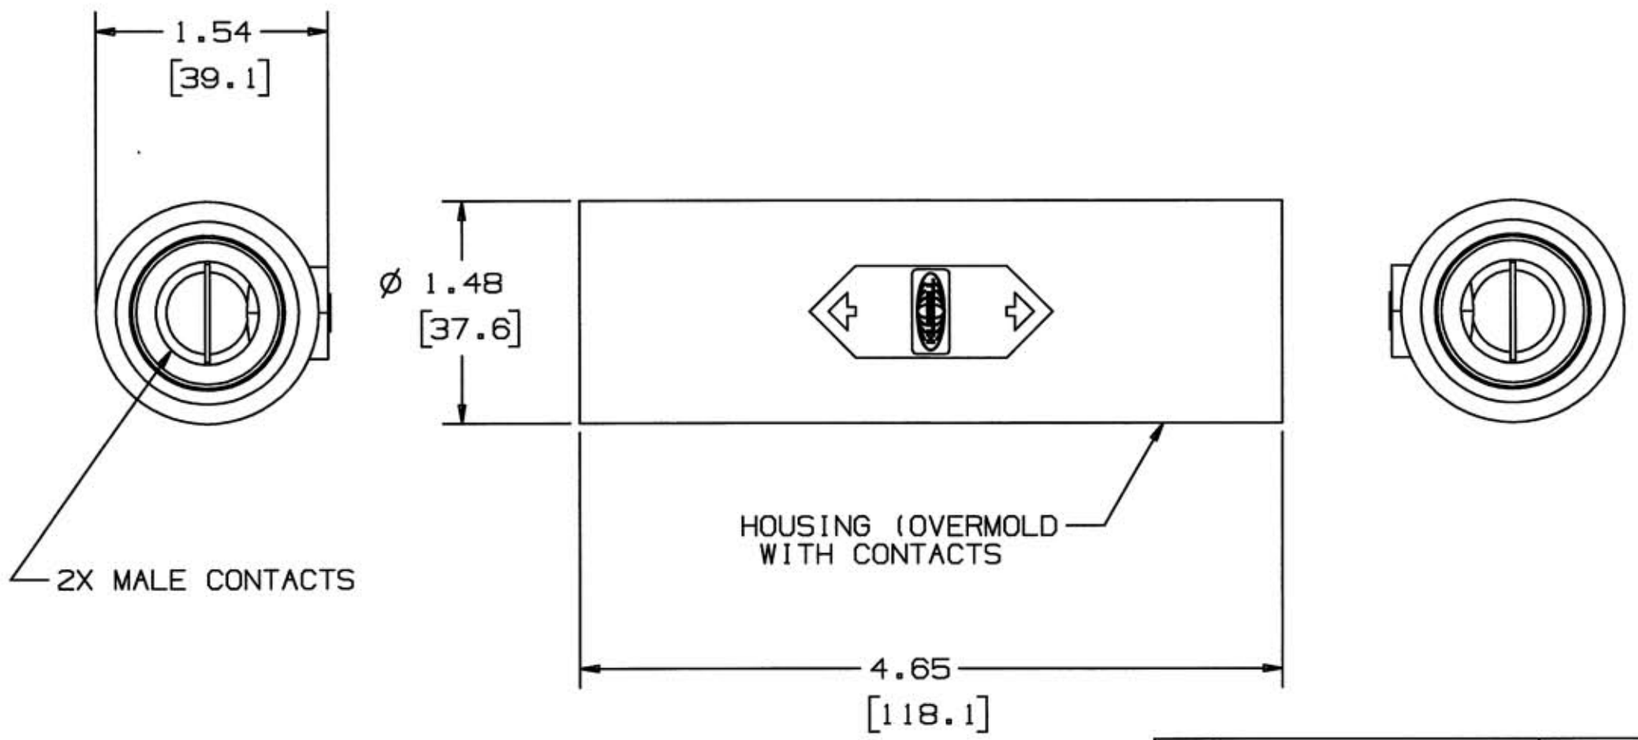

NOTES:
1. DIMENSIONS ARE INCHES ±.02
   [mm] ±.5
2. RATING: 600VAC/250VDC 400 AMP
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12, SEE INSTRUCTION SHEET

HUBBELL CAT. NO.	COLOR
HBLDMBK	BLACK
HBLDMW	WHITE
HBLDMGN	GREEN
HBLDMBR	RED
HBLDMBL	BLUE
HBLDMO	ORANGE
HBLDMBN	BROWN
HBLDMY	YELLOW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
MALE CONTACT	BRASS	

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
2	Ø 1.48 [37.6] WAS Ø 1.48 [1.48] ADD ±.02 & ±.5 TO NOTE 1 CHANGED NOTE 3 PER DCN 11484 TwB	TwB	12/15/04
1	RELEASED PER DCN 10992 MJM TB	TwB	6/25/03

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SINGLE POLE DOUBLE MALE MALE/MALE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY TwB | APP. BY
TR. BY | SCALE 1:1
CHK'D BY | DATE 6/11/03

M-8933 B 2

CODE 74545