

Circuit-Lock® Stainless Steel Disconnects

Hubbell's Stainless Steel Disconnect Switch is the latest addition to the Circuit-Lock® family of switched enclosures. The product has been certified by NSF International for hygiene applications in food and beverage processing. The enclosures are designed to withstand harsh environments with exposure to water, chemicals, oils and frequent washdowns. The enclosures feature 304 Series Stainless Steel and are UL Listed Type 4X and 12. The DIN rail mounted switch accommodates up to two auxiliary contacts for control circuit applications. The high visibility red handle can be locked in the OFF position for compliance with OSHA lockout/tagout requirements.

FEATURES

- Certified by NSF for hygiene in Food Processing applications
- Cover is Embossed with "ON" and "OFF"
- Compact Footprint
- UL60947-4-1A (supercedes UL508) and CSA-C22.2 No.14 IEC Rotary Style Switch
- High Visibility Red Handle
- Meets OSHA Lock-Out/Tag-Out Requirement
- Cover Cannot be Removed while "ON"
- Meets the NEC® Wet and Dry Locations Airspace Requirement of 1/4"(6mm) when Installed
- MotorQuick® Option (30A only)

APPLICATIONS



- Food and Beverage Processing
- Conveyor Applications
- Outdoors
- Corrosive Environments

MATERIALS

- Enclosure - #14 Gauge Type 304 Stainless Steel
- Handle Assembly - Valox®
- Enclosure Gasket - Neoprene
- Shaft Seal - Molded Neoprene
- Enclosure Screws - Stainless Steel



NEC® is a registered trademark of National Fire Protection Association.
Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.



SPECIFICATIONS

- Moisture Resistance
Outdoor: Type 4X (Wash down, Corrosion Resistant)
Indoor: Type 12 (Dust-tight, Falling Dirt, Noncorrosive Liquids).
- Flammability: UL94-5VA and V0 Classification.
- Operating Temperature: Maximum Continuous 167°F (75°C); Minimum Continuous -40°F (-40°C) without impact.
- All materials are UV stabilized.
- Max. Working Voltage: 600V AC RMS.
- Current Interrupting: Certified for current interrupting at full rated current and voltage.
- Short Circuit Current Ratings (SCCR):
 - 30/60/100A: Suitable for use on a circuit capable of delivering not more than 10kA RMS symmetrical, 600V AC max.
 - 30A: Suitable for use on a circuit capable of delivering not more than 65kA RMS symmetrical, 600V AC max. when protected by Class J fuses rated 30A max.
 - 60/100A: Suitable for use on a circuit capable of delivering not more than 65kA RMS symmetrical, 600V AC max. when protected by Class J fuses rated 100A max.
- Terminal Identification: In accordance with UL, CSA and international conventions.

ORDERING INFORMATION

**30, 60 and 100A Circuit-Lock® Unfused Disconnect Switches
in Stainless Steel Enclosures**

Description	Catalog Number
30A Switch.	HBLDS3SS
30A Switch with HBLAC1 auxiliary contact.	HBLDS3SSAC
30A Switch for use with variable frequency drives.	HBLDS3SSVFD
60A Switch.	HBLDS6SS
60A Switch with HBLAC1 auxiliary contact.	HBLDS6SSAC
100A Switch.	HBLDS10SS
100A Switch with HBLAC1 auxiliary contact.	HBLDS10SSAC



HBLDS3SS

HBLDS6SS

**30A MotorQuick® Unfused Disconnect Switches
in Stainless Steel Enclosures**


Description	Catalog Number
HBLDS3SS with one pre-wired LINKOSITY® female receptacle (load side).	HBLDS3SSMQR
HBLDS3SS with 5 foot pre-wired LINKOSITY® female cable (load side).	HBLDS3SSMQ5
HBLDS3SS with one pre-wired LINKOSITY® male receptacle (line side) and one pre-wired LINKOSITY® female receptacle (load side).	HBLDS3SSMQR2



HBLDS3SSMQR

Accessories and Replacement Parts

Description	Catalog Number
Auxiliary Contact "Break After Main Break," 1 set of n/o contacts, 1 set of n/c contacts.	HBLAC1
Auxiliary Contact "Break Before Main Break," 1 set of n/o contacts.	HBLAC2
Ground Block for 30A switches.	HBL30RGB
Ground Block for 60A and 100A switches.	HBL60100RGB
Neutral Block for 30A switches.	HBL30RNB
Neutral Block for 60A switches.	HBL60RNB
Neutral Block for 100A switches.	HBL100RNB
Replacement switch for 30A switches.	HBLDS3RS
Replacement switch for 60A and 100A switches.	HBLDS60100RS

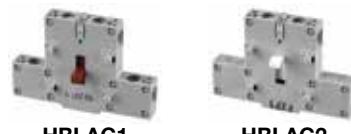

HBLAC1

HBLAC2




HBL30RGB

HBL30RNB

Horsepower Ratings

Voltage	30A	60A	100A
1Ø 120V AC	1	7.5	7.5
1Ø 200-240V AC	3	15	15
1Ø 480V AC	5	30	30
3Ø 200-240V AC	7.5	30	30
3Ø 480V AC	15	50	50
3Ø 600V AC	15	50	50

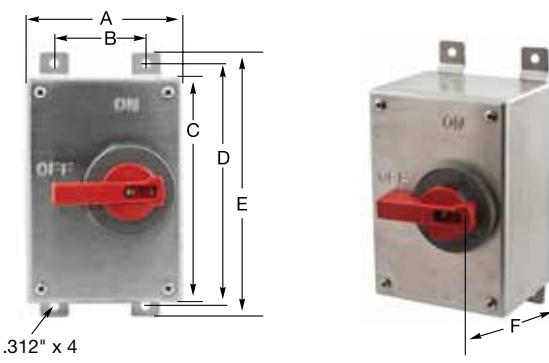**Dimensions inch (mm)**

Key	30A	60A/100A
A	4.9 (124)	7.3 (185)
B	3.3 (84)	5.5 (140)
C	7.0 (179)	10.3 (262)
D	8.4 (213)	11.6 (295)
E	9.1 (232)	12.4 (315)
F	5.4 (137)	6.0 (152)

