

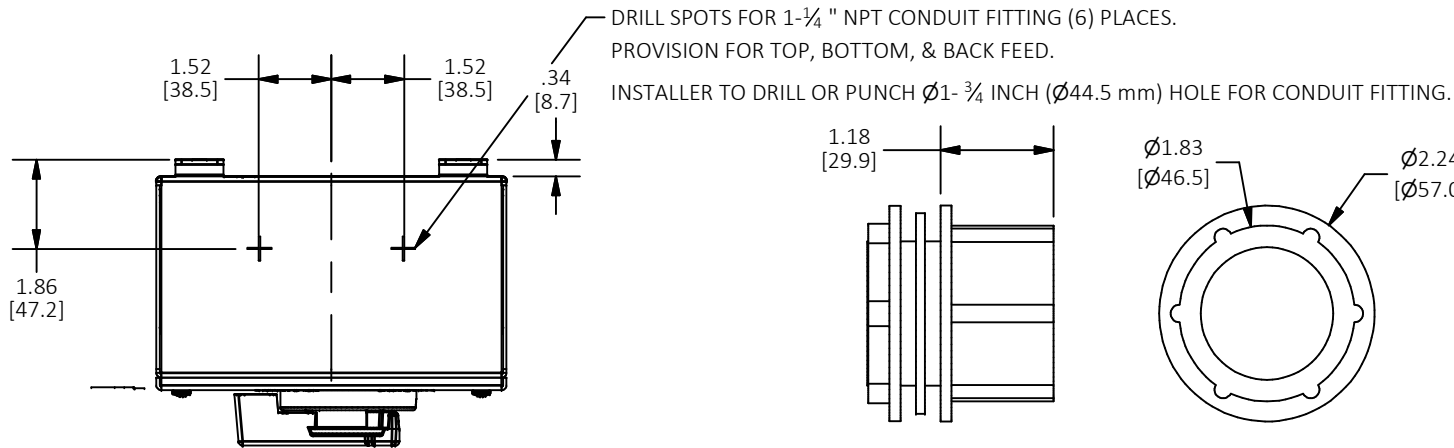
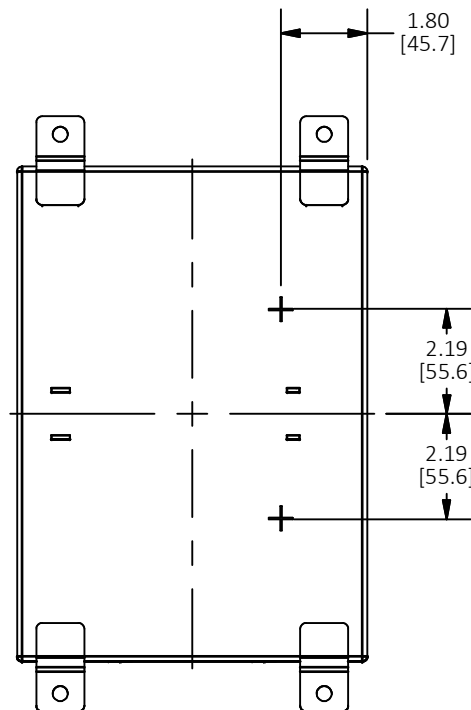
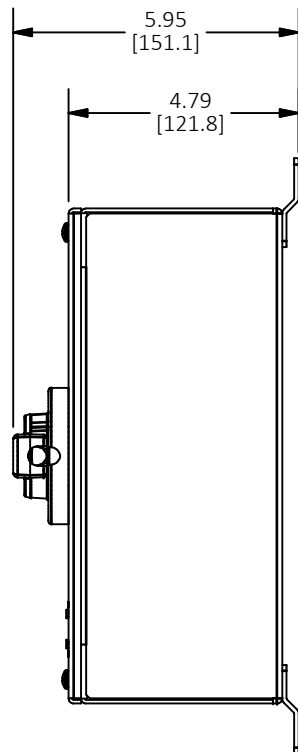


M-13883

1

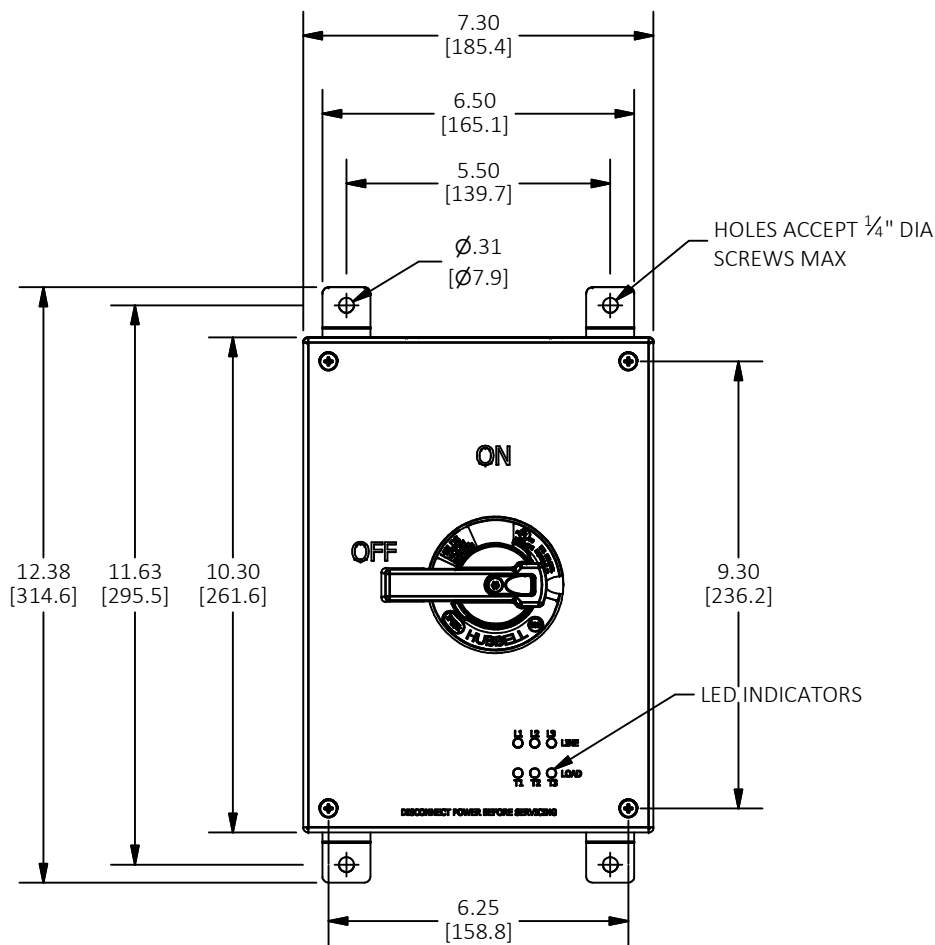

1-¼ INCH NPT CONDUIT FITTING, (2) INCLUDED

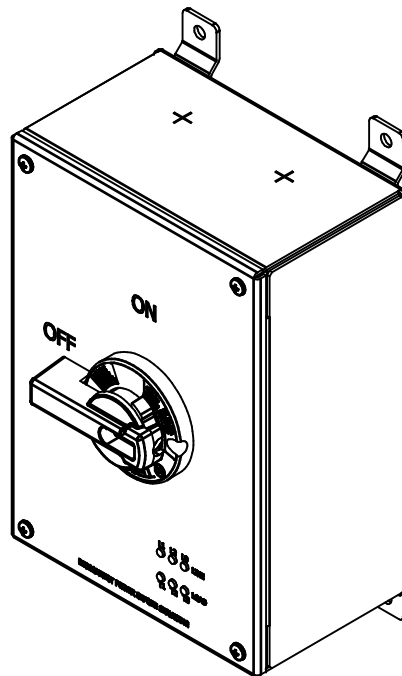


- NOTES:
1. CATALOG NUMBERS: HBLDS6SSP, HBLDS10SSP
  2. DIMENSIONS SHOWN ARE IN INCHES [mm].
  3. ENCLOSURE TYPE 4X & 12
  4. cULus LISTED
  5. NSF CERTIFIED AND IP69K RATING.

| CAT NO. HBLDS6SSP (60 AMP 600 VAC) |                 |
|------------------------------------|-----------------|
| HP                                 | VOLTAGE         |
| 7.5 HP (5.6kW)                     | 120 VAC 1 Ø     |
| 15 HP (11.19 kW)                   | 200-240 VAC 1 Ø |
| 30 HP (22.37 kW)                   | 480 VAC 1 Ø     |
| 30 HP (22.37 kW)                   | 200-240 VAC 3 Ø |
| 50 HP (37.28 kW)                   | 480 VAC 3 Ø     |
| 50 HP (37.28 kW)                   | 600 VAC 3 Ø     |

| CAT NO. HBLDS10SSP (100 AMP 600 VAC) |                 |
|--------------------------------------|-----------------|
| HP                                   | VOLTAGE         |
| 7.5 HP (5.6kW)                       | 120 VAC 1 Ø     |
| 15 HP (11.19 kW)                     | 200-240 VAC 1 Ø |
| 30 HP (22.37 kW)                     | 480 VAC 1 Ø     |
| 30 HP (22.37 kW)                     | 200-240 VAC 3 Ø |
| 50 HP (37.28 kW)                     | 480 VAC 3 Ø     |
| 50 HP (37.28 kW)                     | 600 VAC 3 Ø     |

LIST OF PARTS

| DESCRIPTION          | MATERIAL        | FINISH |
|----------------------|-----------------|--------|
| ENCLOSURE & HARDWARE | STAINLESS STEEL |        |
| HANDLE & MOUNT       | PBT             |        |
| GASKET               | EPDM FOAM       |        |
| CONDUIT HUB          | ZINC            |        |
| LED/PCBD             |                 |        |
| LENS                 | PC              |        |
| GROUND BUS           |                 |        |
|                      |                 |        |
|                      |                 |        |
|                      |                 |        |
|                      |                 |        |
|                      |                 |        |
|                      |                 |        |
|                      |                 |        |
|                      |                 |        |



SCALE: 1/8  
EMBEDED 3D CAD MODEL IN  
"M-13883\_ACAD.dwg"

| 1   | RELEASED PER DCN #23623 AD | TLS | 06/04/18 |
|-----|----------------------------|-----|----------|
| REV | DESCRIPTION                | APP | DATE     |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE  
CIRCUIT-LOCK™ 60/100 AMP STAINLESS STEEL DISCONNECT SWITCH, LED INDICATORS



WIRING DEVICE-KELLEMS  
HUBBELL INCORPORATED  
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED  
.XX = ± .01  
.XXX = ± .005  
ANGLE TOL. ±2°

DR. BY AD  
CHK. BY CAC

SCALE 1 / 4  
DATE 03/09/18