



5 FT. LONG BLACK
12/3 SJO CORD

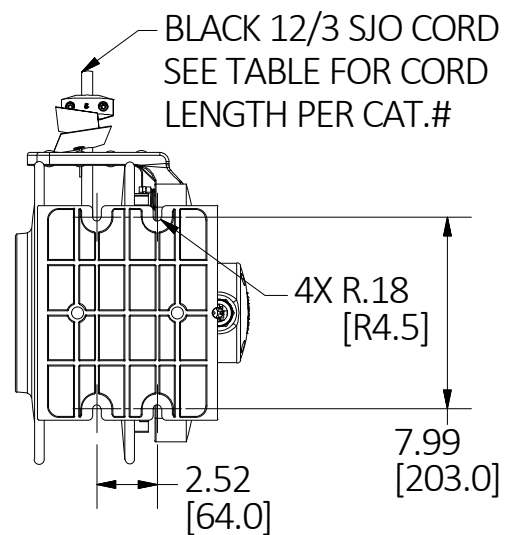


NOTES:
1. DIMENSIONS ARE IN INCHES [mm]
EXCEPT CORD LENGTH IN FEET.

M-13985 1

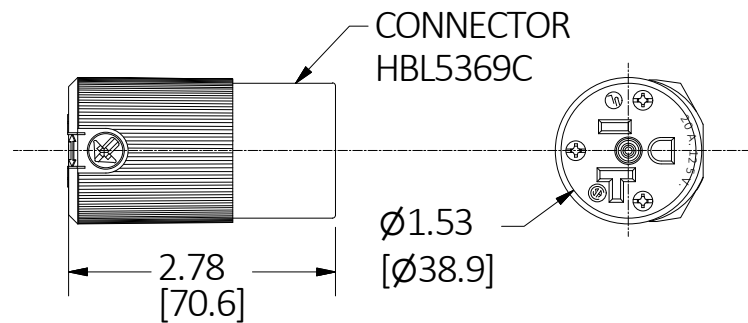

CONFIG. A

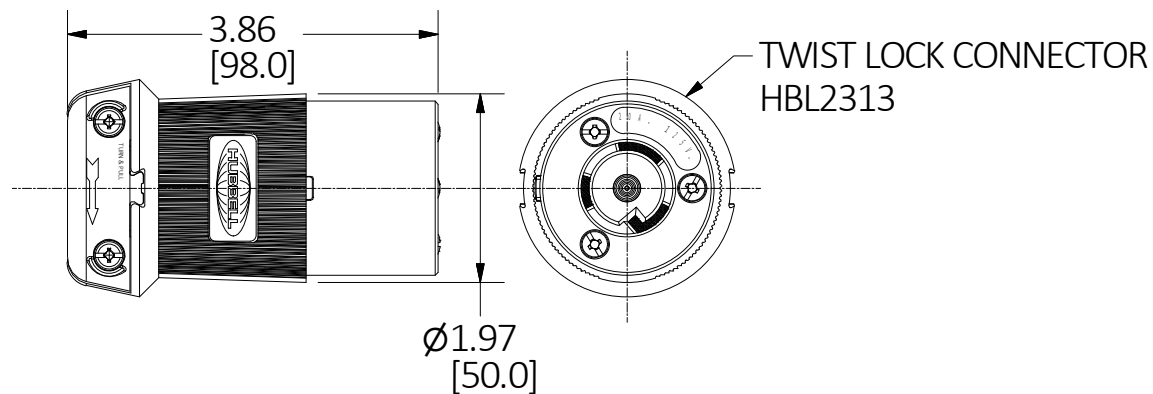

CONFIG. B

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
SPOOL WITH RATCHET	ALUMINUM	POWDER COATING
SPOOL	ALUMINIUM	POWDER COATING
WIRING CHAMBER COVER	ALUMINIUM	POWDER COATING
SPRING BOX COVER	STEEL	ZINC PLATE
CLOCKWORK SPRING	SPRING STEEL	
GUIDE ARM	ALUMINUM	POWDER COATING
GUIDE FRAME	THERMOPLASTIC	BLACK
HARDWARE	STEEL	ZINC PLATE
SPINDLE	STEEL	ZINC PLATE
CORD	COPPER	
BALL STOPPER	THERMOPLASTIC	BLACK
INTERNAL TERMINALS	COPPER ALLOY	
FITTING	ALUMINUM	

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

1	NEW RELEASE PER DCN #24214. D.LI		8/7/2018
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE.
DIMENSIONS ARE IN INCHES [mm].

TITLE
REEL WITH 20A CONNECTOR, UL TYPE 1



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2'	DR. BY D.LI	SCALE NONE
CHK. BY	DATE 08/06/2018	

CATALOG	DESCRIPTION	CONFIG.	RATING	CORD LENGTH	REEL COLOR	APPROX. WEIGHT
HBLI45123C20	REEL W/ SINGLE CONNECTOR, 45'	A	20A 125V	45 FT.	WHITE	26.5 LB [12.0 KG]
HBLI35123C20	REEL W/ SINGLE CONNECTOR, 35'	A	20A 125V	35 FT.	WHITE	24.9 LB [11.3 KG]
HBLI25123C20	REEL W/ SINGLE CONNECTOR, 25'	A	20A 125V	25 FT.	WHITE	23.4 LB [10.6 KG]
HBLI45123TL20	REEL W/TWIST LOCK CONNECTOR. 45'	B	20A 125V	45 FT.	WHITE	26.5 LB [12.0 KG]
HBLI35123TL20	REEL W/TWIST LOCK CONNECTOR. 35'	B	20A 125V	35 FT.	WHITE	24.9 LB [11.3 KG]
HBLI25123TL20	REEL W/TWIST LOCK CONNECTOR. 25'	B	20A 125V	25 FT.	WHITE	23.4 LB [10.6 KG]
HBLI45123C20Y	YL REEL W/ SINGLE CONNECTOR, 45'	A	20A 125V	45 FT.	YELLOW	26.5 LB [12.0 KG]
HBLI35123C20Y	YL REEL W/ SINGLE CONNECTOR, 35'	A	20A 125V	35 FT.	YELLOW	24.9 LB [11.3 KG]
HBLI25123C20Y	YL REEL W/ SINGLE CONNECTOR, 25'	A	20A 125V	25 FT.	YELLOW	23.4 LB [10.6 KG]
HBLI45123TL20Y	YL REEL W/TWIST LOCK CONNECTOR. 45'	B	20A 125V	45 FT.	YELLOW	26.5 LB [12.0 KG]
HBLI35123TL20Y	YL REEL W/TWIST LOCK CONNECTOR. 35'	B	20A 125V	35 FT.	YELLOW	24.9 LB [11.3 KG]
HBLI25123TL20Y	YL REEL W/TWIST LOCK CONNECTOR. 25'	B	20A 125V	25 FT.	YELLOW	23.4 LB [10.6 KG]