

# Straight Blade Devices



## 30A, 125V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

**IP20**  
SUITABILITY



**30A 125V**  
NEMA 5-30R  
UL CSA  
2 HP



**30A 125V**  
NEMA 5-30P  
UL CSA  
2 HP

| Description                                        | Cord Diameter               | Catalog Number  |
|----------------------------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP.                             | —                           | <b>HBL9308</b>  |
| Receptacle, orange, isolated ground <sup>A</sup> . | —                           | <b>IG9308</b>   |
| Plug, nylon, angle, 4-position.                    | .625"-1.187"<br>(15.9-30.1) | <b>HBL9309*</b> |



**HBL9308**

## 30A, 125V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

**IP20**  
SUITABILITY




**30A 125V**  
NEMA TT-30R  
UL Listed  
2 HP



**30A 125V**  
NEMA TT-30P  
UL Listed  
2 HP

| Description                                     | Cord Diameter               | Catalog Number  |
|-------------------------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP. Travel Trailer use only. | —                           | <b>HBLTT30R</b> |
| Plug, nylon, angle. Travel Trailer use only.    | .625"-1.187"<br>(15.9-30.1) | <b>HBLTT30P</b> |



**IG9308**

## 30A, 250V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

**IP20**  
SUITABILITY



**30A 250V**  
NEMA 6-30R  
UL CSA  
2 HP



**30A 250V**  
NEMA 6-30P  
UL CSA  
2 HP

| Description                                        | Cord Diameter               | Catalog Number  |
|----------------------------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP.                             | —                           | <b>HBL9330</b>  |
| Receptacle, orange, isolated ground <sup>A</sup> . | —                           | <b>IG9330</b>   |
| Plug, nylon, angle, 4-position                     | .625"-1.187"<br>(15.9-30.1) | <b>HBL9331*</b> |



**HBL9331**

## 30A, 277V AC, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

**IP20**  
SUITABILITY




**30A 277V AC**  
NEMA 7-30R  
UL CSA  
3 HP



**30A 277V AC**  
NEMA 7-30P  
UL CSA  
3 HP

| Description                     | Cord Diameter               | Catalog Number  |
|---------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP.          | —                           | <b>HBL9315</b>  |
| Plug, nylon, angle, 4-position. | .625"-1.187"<br>(15.9-30.1) | <b>HBL9319*</b> |

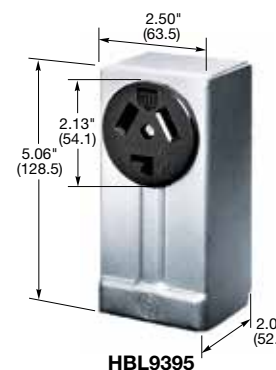

**HBL9395**

## 30A, 125/250V, 3 Pole, 3 Wire Non-Grounding, Receptacles and Plugs

**IP20**  
SUITABILITY




**30A 125/250V**  
NEMA 10-30R  
UL Listed  
2(2) HP



**30A 125/250V**  
NEMA 10-30P  
UL Listed  
2(2) HP

| Description                                 | Cord Diameter               | Catalog Number  |
|---------------------------------------------|-----------------------------|-----------------|
| Receptacle, black phenolic.                 | —                           | <b>HBL9350</b>  |
| Receptacle, surface mount aluminum housing. | —                           | <b>HBL9395</b>  |
| Plug, Insulgrip®, nylon.                    | .625"-1.00"<br>(15.9-25.4)  | <b>HBL9337C</b> |
| Plug, nylon, angle, 4-position.             | .625"-1.187"<br>(15.9-30.1) | <b>HBL9333</b>  |



**HBL9350**

Note: RTP is an abbreviation for reinforced thermoplastic polyester.

<sup>A</sup>See section N for additional information on isolated ground devices..

\*Not Fed. Spec. Listed.

See page A-49 for accessories.

Dimensions in Inches (mm)