



FIGURE 2

WIRE	COLOR
1	GREEN
2	BLACK
3	WHITE




FIGURE 3

WIRE	COLOR
1	BLACK
2	WHITE
3	RED
4	GREEN




FIGURE 4

WIRE	COLOR
1	WHITE
2	RED
3	GREEN
4	ORANGE
5	BLACK



FIGURE 5

WIRE	COLOR
1	WHITE
2	RED
3	GREEN
4	ORANGE
5	BLACK
6	BLUE





FIGURE 1

WIRE	COLOR
1	WHITE
2	BLACK

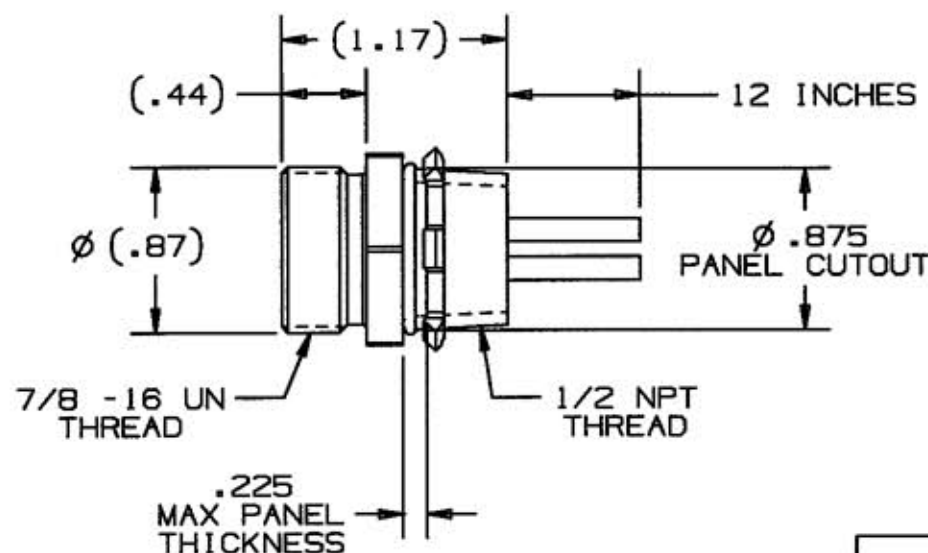

CATALOG NUMBER	SEE FIGURE NUMBER	NUMBER OF POLES	AMPS
HRMS02501	1	2	15
HRMS03501	2	3	15
HRMS04501	3	4	12
HRMS05501	4	5	10
HRMS06501	5	6	10

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
RECEPTACLE SHELL	BRASS	NICKEL
INSULATOR	NYLON	WHITE
RETAINER	NYLON	BLACK
LOCKNUT	STEEL	ZINC
O-RING	RUBBER	BLACK
O-RING	RUBBER	BLACK
SOCKET CONTACT	COPPER ALLOY	GOLD OVER Pd/Ni
WIRE	16 AWG PVC	

2	REVISED VIEWS&DIMS TO REFLECT NEW RECEPTACLE SHELL PART NUMBER PER DCN 11340 RCM	GPH	12/4/03
1	RELEASED PER DCN6427. DJH	GPH	03/22/99
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE FEMALE RECEPTACLE
HEX MOUNT, 600V
#16 AWG WIRE

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT
FRACTIONS ±1/64	DR. BY DJH APP. BY
DECIMALS ±.005	TR. BY SCALE NONE
ANGLES ±2°	CHK'D BY DATE 03/19/99

DIMENSION SHEET FOR CAT. NO. SEE CHART

REPAIRABLE ☐ NON-REPAIRABLE ☒

M-8035

2