



## Table of Contents



### Pulling Grips



### Support Grips



### Cord Connectors



Product	Page
Products at a Glance	V-2
Quick Reference Selection Guide for Grip Applications	V-3
Kellems® Wire Mesh Grips Diagram	V-4
<b>Pulling Grips</b>	
Overhead DUA-PULL® and Multiple Strength	V-7
Underground K-Type and T-Type	V-8
Special Purpose	V-9
Low Tension	V-13
Wire Rope Splicing	V-14
Cable Splicing	V-15
Tools, Bands, and Swivels	V-16
<b>Support Grips</b>	
Standard Duty	V-20
Special Purpose	V-24
Heavy Duty	V-24
Service Drop	V-26
Bus Drop	V-28
Conduit Riser	V-29
Fiber Optic Cable Grips	V-38
Hose Containment Grips	V-46

Product	Page
Strain Relief System Selection Chart	V-48
Deluxe Cord Grips	V-50
PG and Metric Threaded Deluxe Cord Grips	V-54
Dust-Tight Strain Relief Grips	V-55
I-Grips	V-56
Thread Adapters for Multi-Pin Connectors	V-57
Strain Relief Grips for Liquidtight Conduit	V-58
<b>Cord Connectors</b>	
Male Connectors	V-70
Female and Underground Feeder Connectors	V-73
Low Profile NPT, PG and Metric Thread Connectors	V-74
Accessories	V-75
Hubbell Juniors® Miniature Cord Connectors	V-76
PolyTuff® I and PolyTuff® II Non-Metallic Liquidtight Conduit Tubing	V-89
Non-Metallic Liquidtight Fittings	V-90
Metallic Liquidtight Conduit Fittings	V-91



## Products at a Glance



### Pulling Grips

- The galvanized steel mesh grip provides strength for secure pulling jobs
- Endless weave allows easy installation onto cable
- Flexible or rotating eyes will mate easily with line stringing swivels for attachment to pulling lines; they have great strength for trouble free pulling jobs
- Shoulder protectors contain the cable inside the grip



### Support Grips

- Solid eye assemblies provide eye reinforcement at support hardware
- Four eye styles available: single, double, universal and offset
- Identification tag shows: catalog number, diameter range, agency approval and bar code
- Available in tin coated bronze, stainless steel and non-metallic aramid fiber



### Fiber Optic Cable Grips

- Pulling Grips are used for outside plant cable; they are easy to install and remove, reusable and have a slim profile for small build up
- OPTISOK® Grip is a revolutionary tool to pull pre-terminated fiber optic cables. They will protect the connectors and guide the bundle through the pulling environment
- Will support the cable's weight as it hangs in vertical, sloping or horizontal position



### Strain Relief Grips

- Stainless steel mesh is corrosion resistant. Can be used inside or outside
- Multiweave grip gives cable arc-of-bend control minimizing cable damage and extending cable life
- A liquidtight fitting is available with both cable and conduit fittings; prevents liquids from running through the fitting into the enclosure



### Cord Connectors

- Machined threads provide a strong positive seal; the tapered interior dome easily drives the bushing into the connector bod
- Patented GOTCHA® ring incorporates a split hinge design to prevent friction and provide strain relief
- Lubricated neoprene bushing compresses easily for a liquidtight seal and added pull-out protection




### PolyTuff® Non-Metallic Liquidtight Conduit and Fittings

- Nylon compression nut has a tapered dome to tighten ferrule onto conduit
- Tapered, machined threads fasten securely and provide additional liquidtight sealing
- Non-integral, reusable steel, ferrule is easily installed, to seal conduit
- PVC tubing handles twists, turns, bends, switchbacks and straightaways with ease
- UL listed/recognized and CSA certified




## Quick Reference Selection Guide for Grip Applications

### Pulling Grips



#### Heavy-Duty Rotating Eye

For underground wiring and overhead heavy-duty pulling of service lines and new construction cable. See pages V-8 and V-9.



#### Heavy-Duty Flexible Eye

For overhead transmission and distribution line stringing. See pages V-7, V-8, and V-10.



#### Slack Grips


For removing underground cable and pulling slack in existing cable and new installations and when end of cable is not available. See pages V-11 and V-12.



#### Light-Duty Flexible Eye


For light industrial pulling of electrical cable and for underground and industrial plant wiring and re-wiring. See page V-13.

### Support Grips




#### Single Eye

For single hook attachment of permanent indoor/outdoor cable. Available on heavy-duty, standard duty, and service drop grips. See pages V-20, V-24, and V-26.

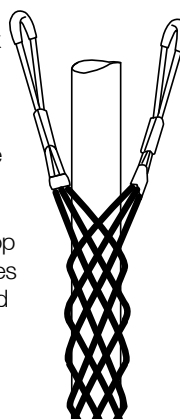


#### Double Eye

For double hook attachment of permanent indoor/outdoor cable. Available on heavy-duty and standard duty grips. See pages V-21 and V-25.



#### Single Offset Eye


For offset hook attachment of permanent indoor/outdoor cable. Available on standard duty and light-duty support grips. See page V-22.



#### Universal Eye

Used to fasten around a structure or closed loop. Available on standard duty support and light or heavy duty service drop grips. See pages V-23 and V-27.

### Support Grips




#### Wide Range Bus Drop

Used indoors for cable support where flexible cable connects electrical equipment to bus duct. Support air hose and water hose. See page V-28.



#### Dust-Tight Strain Relief

Indoor use only for wiring of electrical enclosures, machine tools, portable power tools, bus drop cable systems. See page V-55.



#### Deluxe Cord

Indoor or outdoor use where subject to moisture, splash, or washdown. Examples are enclosures, crane hoist and pendant drop stations, hand tools, pumps, and processing equipment. Available in straight, 90°, or 45° configurations. See pages V-50 to V-54.



#### Liquid-Tight, Flexible Metal Conduit

Wiring of machine tools, electrical enclosures, motors, and systems subjected to vibration, flexure, motion, or strain. Available in straight, 90°, or 45° configurations. See pages V-58 to V-60.

### Other Specialty Grips

#### Splicing Grips

Used as temporary splice for cable and wire rope, or as reinforcement to protect cables and hoses. See pages V-14 and V-15.

#### Conduit Riser Grips

Ideal for supporting electrical wires inside rigid conduit via a supporting ring. See pages V-29 to V-31.


#### Hose Containment Grips

Used on flexible hose lines to prevent violent whipping of hose in the event of failure at the fitting. See pages V-46 and V-47.

*Specifications are subject to change without notice.*



## Kellems® Wire Mesh Grips Diagram

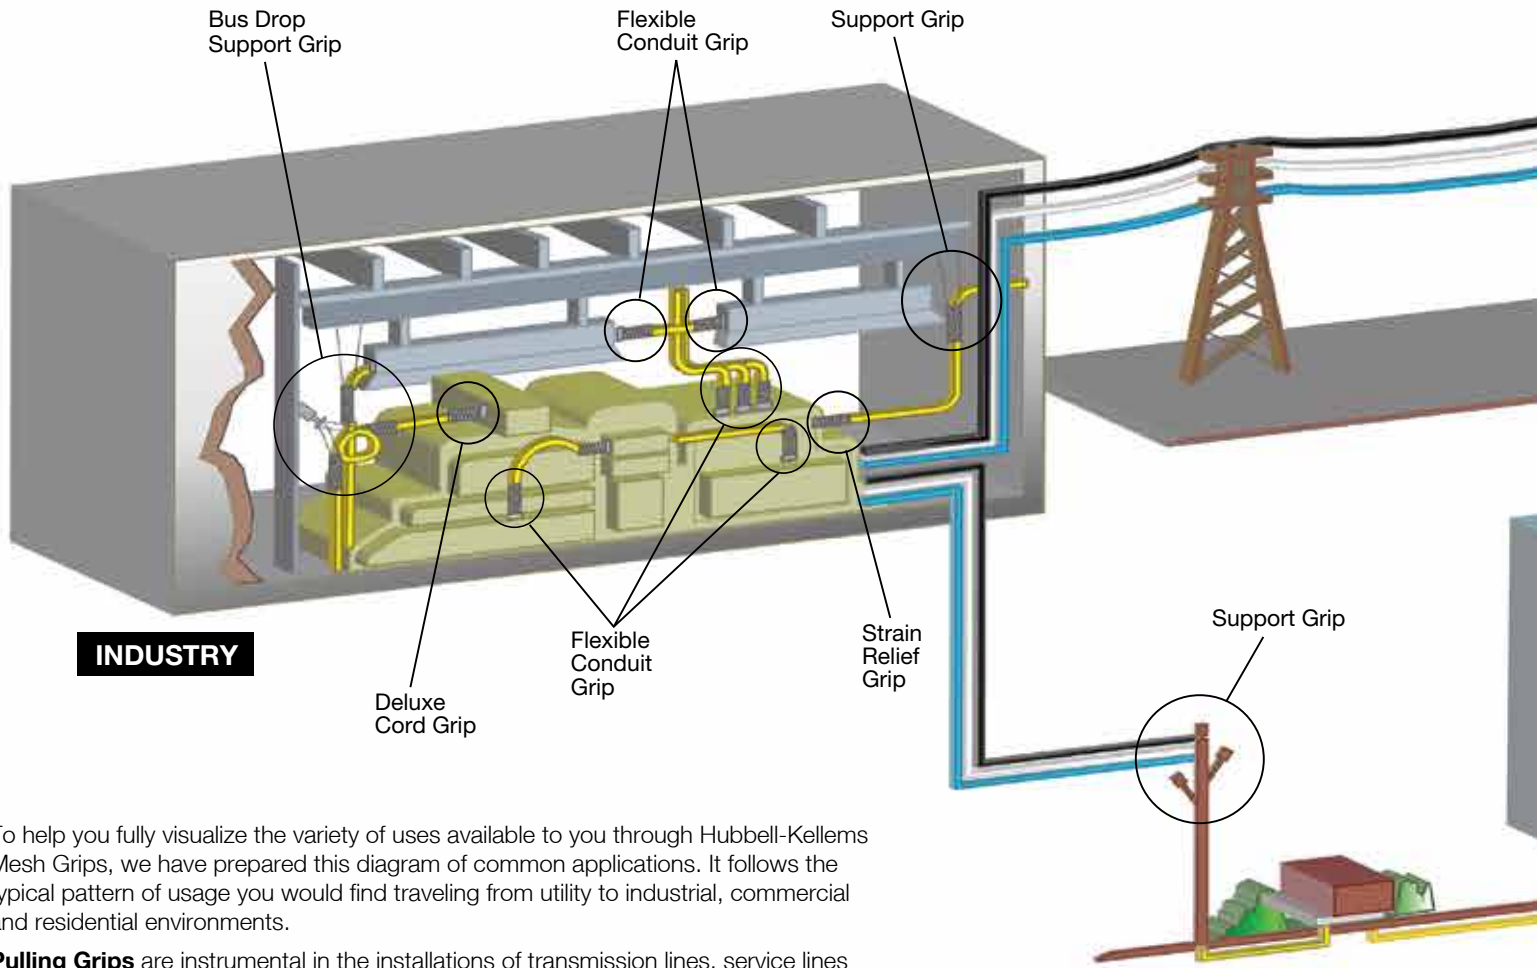


To help you fully visualize the variety of uses available to you through Hubbell-Kellems Mesh Grips, we have prepared this diagram of common applications. It follows the typical pattern of usage you would find traveling from utility to industrial, commercial and residential environments.


**Pulling Grips** are instrumental in the installations of transmission lines, service lines and cabling for construction and maintenance.

**Support Grips** provide holding management for indoor and outdoor permanent cable installations.


**Strain Relief Grips** are most often used to provide maximum reliability and minimum maintenance in areas where cords on machinery or equipment is impacted by motion or vibration or at risk of damage from cable pullout.

Beyond the electrical applications illustrated here, Hubbell-Kellems Mesh Grips can be used for wire management on radio and microwave communications towers, crane and hoist wire rope maintenance, elevator cable management and more.

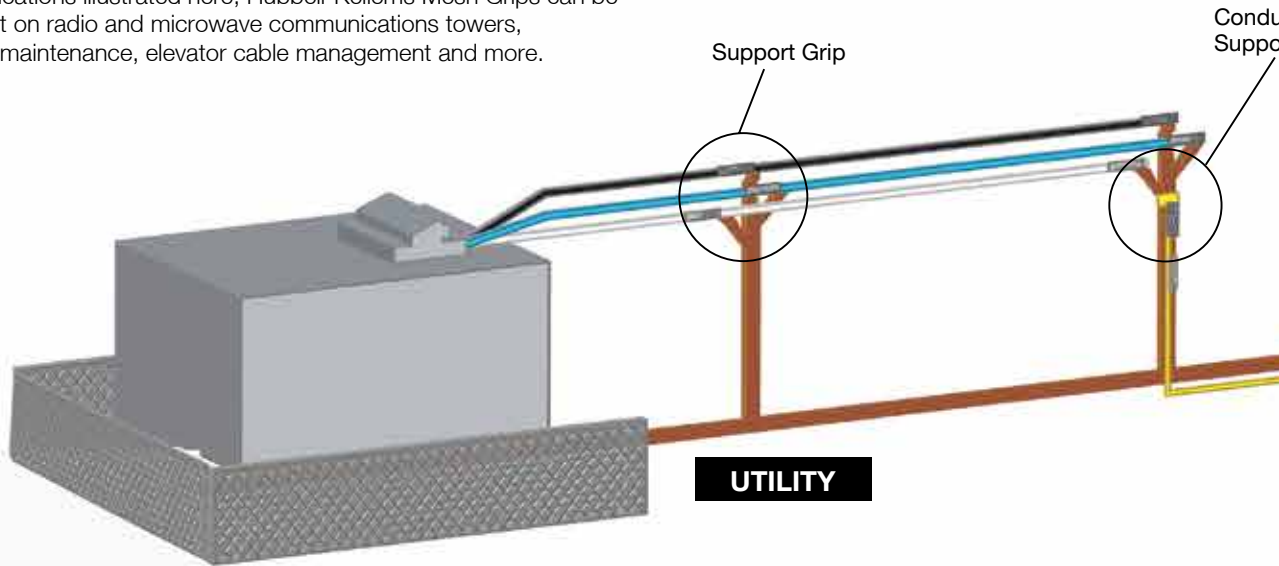


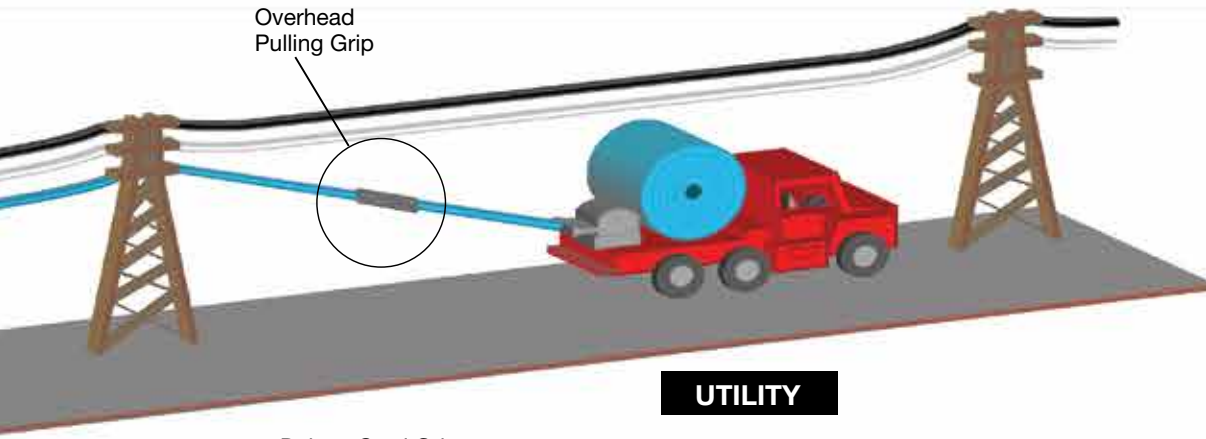

**UTILITY**

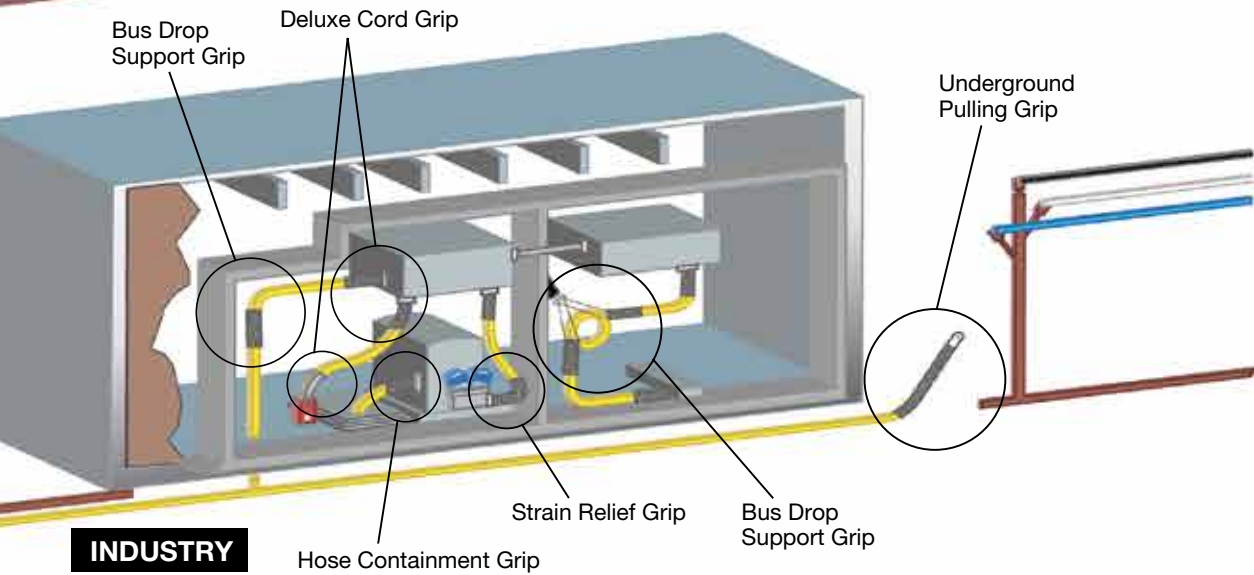

**INDUSTRY**

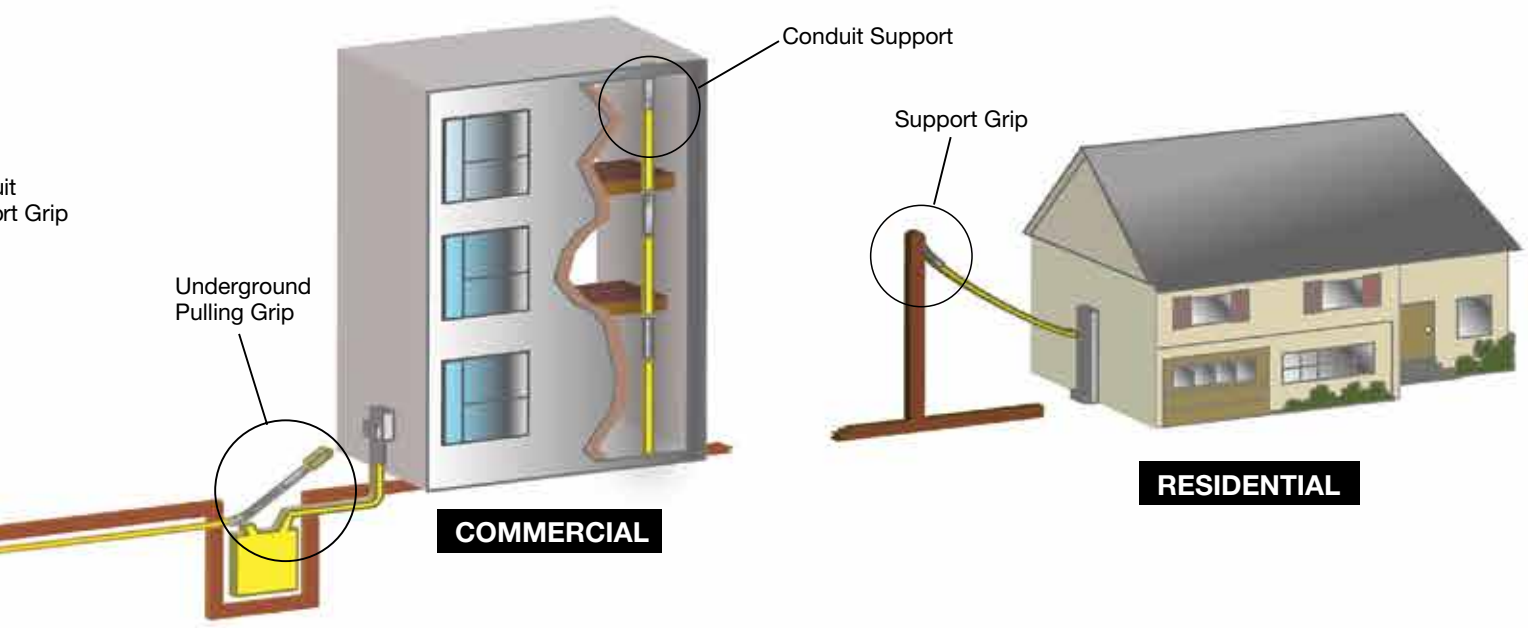

**COMMERCIAL**

**RESIDENTIAL**



## Features and Benefits

### Kellems® Pulling Grips

Pulling grips are reusable tools for pulling electrical cable, bare conductor or rope. They are easy and fast to install, providing the user with a smooth, slim profile that allows for easy passage through ducts and conduit.

These grips are made of the highest quality galvanized steel strand which assures the user of a long lasting grip. There is a Kellems Pulling Grip for every pulling job.

- Made of high strength galvanized steel strand
- Mesh design offers the greatest holding power for all pulling applications
- Each grip size is color coded for fast and accurate identification and selection
- Will mate with swivels



03302016



#### Mesh Grip

- The galvanized steel mesh grip provides strength for secure pulling jobs and a slim profile with little build-up; it has flexibility to follow cable path
- The multiweave styles available add strength for big pulling jobs and provide positive gripping power



#### Eye Styles

- Heavy-duty rotating eye for underground wiring and overhead heavy-duty pulling of service lines and new construction cable
- Flexible or rotating eyes will mate easily with line stringing swivels for attachment to pulling lines; they have great strength for trouble free pulling jobs



#### Cable Protection

- Shoulder protectors contain the cable inside the grip and smooth the passage of the grip over line stringing blocks or conduit bends; they protect the leading edge of the grip from abrasion



#### Accessories

- Swivels are essential to the efficiency and safety of any high tension application
- Punch-Lok® Bands are applied over the tail of a grip to prevent the mesh from being tripped or pulled loose
- Banding tools



## DUA-PULL® Grips, Flexible Eye, Double Weave Mesh

DUA-PULL Pulling Grips are the highest strength pulling grips manufactured for overhead transmission line stringing applications. They have a dual function of working with both bare and insulated conductors and synthetic rope, not provided by any other grip. Kellems' patented two-over, two-under weave design gives exceptional strength and gripping ability by putting more steel mesh in contact with the cable or rope surfaces. **THIS IS THE ONLY PULLING GRIP RECOMMENDED FOR USE ON SYNTHETIC ROPE.**

**IMPORTANT**  
Read all breaking strength, safety and technical data relating to this product.

### Benefits

- Made of high strength galvanized steel strand
- Recommended for pulling bare or insulated conductor, wire rope and synthetic rope
- DUA-PULL mesh design offers the greatest holding power for all pulling applications
- Each grip size is color coded for fast and accurate identification and selection
- Will mate with swivels, see page V-16



### DUA-PULL® Grips

Diameter Range		Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Eye B Diameter Inches (cm)	Over Cable and Grip** Inches (cm)	Color Code	Catalog Number
Conductor Inches (cm)	Rope* Inches (cm)							
.19"- .37" (.48-.94)	.25"- .65" (.63-1.65)	6,500 (28,912)	10" (25.40)	24" (60.96)	.220" (.56)	.200" (.51)	Black	<b>033271037</b>
.38"- .62" (.97-1.57)	.50"- .90" (1.27-2.29)	14,000 (62,272)	12" (30.48)	36" (91.44)	.375" (.95)	.280" (.71)	Dk Green	<b>033271038</b>
.63"- .87" (1.60-2.21)	.75"-1.10" (1.90-2.79)	20,000 (88,960)	13" (33.02)	48" (121.92)	.437" (1.11)	.360" (.91)	Red	<b>033271039</b>
.88"-1.12" (2.24-2.84)	1.00"-1.50" (2.54-3.81)	30,600 (136,109)	15" (38.10)	60" (152.40)	.500" (1.27)	.500" (1.27)	Dk Blue	<b>033271040</b>
1.13"-1.37" (2.87-3.48)	1.25"-1.70" (3.17-4.32)	46,800 (208,166)	18" (45.72)	76" (193.04)	.625" (1.59)	.625" (1.59)	Yellow	<b>033271041</b>
1.38"-1.90" (3.51-4.38)	1.50"-2.10" (3.81-5.33)	66,500 (295,792)	24" (60.96)	89" (226.06)	.750" (1.90)	.750" (1.90)	Aluminum	<b>033271042</b>

Note: E = Eye length. M = Mesh length at nominal diameter.  
\*For rope, select smallest size grip which meets required work load.  
\*\*Add to cable or rope diameter.

### Feed Tubes

The Kellems Feed Tube is used when assembling synthetic rope into the DUA-PULL Grip. It is required on the largest two sizes of DUA-PULL Grips. Feed Tubes are available for use on all size DUA-PULL Grips.

### Benefits

- Saves time, allowing fast, easy assembly
- Can be reused if not damaged



### DUA-PULL® Feed Tubes

For Use with DUA-PULL Grips	Rope Diameter Inches (cm)	Feed Tube Length Inches (cm)	Catalog Number
033271037	.25"- .65" (.63-1.65)	28" (71.12)	<b>091061043</b>
033271038	.50"- .90" (1.27-2.29)	40" (101.60)	<b>091061044</b>
033271039	.75"-1.10" (1.90-2.79)	52" (132.08)	<b>091061045</b>
033271040	1.00"-1.50" (2.54-3.81)	67" (170.18)	<b>091061046</b>
033271041	1.25"-1.70" (3.17-4.32)	83" (210.82)	<b>091061047</b>
033271042	1.50"-2.10" (3.81-5.33)	96" (243.84)	<b>091061048</b>

Note: 1. Do not run grips or swivels over bullwheels while under tension.  
2. Two bands should be firmly attached approximately 1" and 2" (2.54cm and 5.08cm) from the grip's tail. Banding is required to ensure maximum reliability and guard against accidental release, see page V-16.  
3. Double braided rope, such as 2-in-1 type, should be back spliced for approximately 2/3 of the mesh length for best gripping results. Grip size should be selected by diameter of back splice.



Dimensions in Inches (mm)



## Multiple Strength Style Grips

Multiple Strength Pulling Grips are designed for pulling aluminum or copper bare conductor, ground wires, messenger strands, wire rope and insulated cables. They are made of high strength galvanized steel strand and feature a multi-weave mesh construction of single, double and triple weave for firm holding power.

### IMPORTANT


Read all breaking strength, safety and technical data relating to this product.

### Rotating Eye Feature

Multiple Strength Grips are available with a forged steel rotating eye which can be attached to a swivel. The forged eye is durable, compact and streamlined and will thread through blocks and sheaves without binding. **The rotating eye is not a swivel and will not turn while under tension;** it can turn to relieve pulling torque when tension is relaxed. If constant swivel action is required, a swivel should be used. For swivel dimensions, see page V-16. For rotating eye dimensions, see page V-9.

### Benefits

- Economical, high strength pulling tool
- Multi-weave construction provides greater strength and holding power
- Endless Weave Grip end lies flat on the cable and will not snag

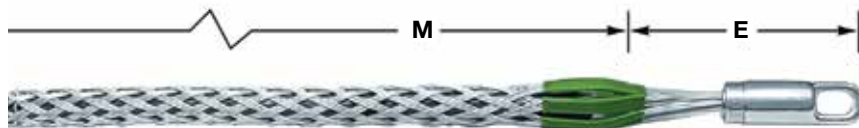

### Multiple Strength Grip, Rotating Eye

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Rotating Eye Dia. Inches (cm)	Color Code	Catalog Number
.25"--.49" (.63-1.24)	6,800 (30,246)	5" (12.70)	26" (66.04)	7/8" (2.22)	Dark Green	<b>03302016</b>
.50"-.74" (1.27-1.88)	10,000 (44,480)	6" (15.24)	32" (81.28)	1" (2.54)	Brown	<b>03302018</b>
.75"-.99" (1.90-2.51)	14,400 (64,051)	6" (15.24)	41" (104.14)	1" (2.54)	Light Blue	<b>03302020</b>
1.00"-1.24" (2.54-3.15)	24,600 (109,420)	8" (20.32)	52" (132.08)	1 1/8" (3.49)	Gold	<b>03302022</b>
1.25"-1.49" (3.17-3.78)	30,600 (136,109)	8" (20.32)	56" (142.24)	1 1/8" (4.13)	Black	<b>03302024</b>
1.50"-1.74" (3.81-4.42)	30,600 (136,109)	9" (22.86)	60" (152.40)	1 1/8" (4.76)	Red	<b>03302026</b>
1.75"-2.24" (4.44-5.69)	48,000 (213,504)	10" (25.40)	70" (177.80)	1 1/8" (4.76)	Dark Blue	<b>03302028</b>
2.00"-2.49" (5.08-6.32)	48,000 (213,504)	10" (25.40)	50" (127.00)	1 1/8" (4.76)	Yellow	<b>03302066</b>
2.50"-2.99" (6.35-7.59)	48,000 (213,504)	10" (25.40)	52" (132.08)	1 1/8" (4.76)	Orange	<b>03302097</b>
3.00"-3.49" (7.62-8.86)	48,000 (213,504)	10" (25.40)	50" (127.00)	1 1/8" (4.76)	Aluminum	<b>033021030</b>
3.50"-3.99" (8.89-10.13)	48,000 (213,504)	10" (25.40)	53" (134.62)	1 1/8" (4.76)	Light Green	<b>033021031</b>

Note: E- Eye length M-Mesh length at nominal diameter.

### Flexible Eye Feature

Multiple Strength Grips are also available with a flexible, patented wire rope eye. This compact eye will mate with a swivel, and pass through blocks and sheaves without binding.



### Multiple Strength Grip, Flexible Eye

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Eye A Dia. Inches (cm)	Color Code	Catalog Number
.25"-.49" (.63-1.24)	6,800 (30,246)	9" (22.86)	26" (66.04)	1/4" (.63)	Dark Green	<b>03302044</b>
.50"-.74" (1.27-1.88)	10,000 (44,480)	9" (22.86)	32" (81.28)	5/16" (.79)	Brown	<b>03302046</b>
.75"-.99" (1.90-2.51)	14,400 (64,051)	11" (27.94)	41" (104.14)	3/8" (.95)	Light Blue	<b>03302048</b>
1.00"-1.24" (2.54-3.15)	24,600 (109,420)	12" (30.48)	52" (132.08)	1/2" (1.27)	Gold	<b>03302050</b>
1.25"-1.49" (3.17-3.78)	30,600 (136,109)	12" (30.48)	56" (142.24)	1/2" (1.27)	Black	<b>03302052</b>
1.50"-1.74" (3.81-4.42)	30,600 (136,109)	12" (30.48)	60" (152.40)	1/2" (1.27)	Red	<b>03302054</b>
1.75"-2.24" (4.44-5.69)	48,000 (213,504)	18" (45.72)	70" (177.80)	5/8" (1.59)	Dark Blue	<b>03302056</b>
2.00"-2.49" (5.08-6.32)	48,000 (213,504)	18" (45.72)	50" (127.00)	5/8" (1.59)	Yellow	<b>033021078</b>
2.50"-2.99" (6.35-7.59)	48,000 (213,504)	18" (45.72)	52" (132.08)	5/8" (1.59)	Orange	<b>033021079</b>
3.00"-3.49" (7.62-8.86)	48,000 (213,504)	18" (45.72)	50" (127.00)	5/8" (1.59)	Aluminum	<b>033021080</b>
3.50"-3.99" (8.89-10.13)	48,000 (213,504)	18" (45.72)	53" (134.62)	5/8" (1.59)	Light Green	<b>033021081</b>

Note: E- Eye length. M-Mesh length at nominal diameter.

1. Do not run grips or swivels over bullwheels while under tension.

2. Two bands should be firmly attached approximately 1" and 2" (2.54cm and 5.08cm) from the grip's tail.

Banding is required to ensure maximum reliability and guard against accidental release, see page V-16.

Dimensions in Inches (mm)





## K-Type Grips

Kellems® Rotating Eye, K-Type Pulling Grips are made of high strength galvanized steel strand. All Grips feature double weave mesh for greater strength and added mesh contact on the table, to handle longer or heavier pulling jobs. The forged eye mates easily with a swivel or shackle.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Rotating Eye Feature

K-Type Grips come equipped with a forged steel rotating eye which can be attached to a swivel. The forged eye is durable, compact and streamlined, and will thread through blocks and sheaves without binding. **The rotating eye is not a swivel and will not turn while under tension;** it can turn to relieve pulling torque when the tension is relaxed. If constant swivel action is required, a swivel should be used. For swivel dimensions, see page V-16. For rotating eye dimensions, see below.

### Benefits

- An economical tool for pulling cable
- Safe, rugged and dependable
- Equipped with a rotating eye for spin out of pulling torque after load release
- Easily installed and removed




### K-Type Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Rotating Eye Dia. Inches (cm)	Catalog Number
<b>Short</b>					
.50"-.62" (1.27-1.57)	5,600 (24,909)	5" (12.70)	11" (27.94)	7/8" (2.22)	<b>03301001</b>
.63"-.74" (1.60-1.88)	6,800 (30,246)	5" (12.70)	11" (27.94)	7/8" (2.22)	<b>03301002</b>
.75"-.99" (1.90-2.51)	6,800 (30,246)	6" (15.24)	20" (50.80)	1" (2.54)	<b>03301013</b>
1.00"-1.24" (2.54-3.15)	12,800 (56,934)	7" (17.78)	20" (50.80)	1 3/8" (3.49)	<b>03301014</b>
1.25"-1.49" (3.17-3.78)	12,800 (56,934)	7" (17.78)	21" (53.34)	1 3/8" (3.49)	<b>03301016</b>
1.50"-1.99" (3.81-5.05)	16,400 (72,941)	7" (17.78)	25" (63.50)	1 3/8" (3.49)	<b>03301017</b>
2.00"-2.49" (5.08-6.32)	27,200 (120,986)	8" (20.32)	26" (66.04)	1 5/8" (4.13)	<b>03301018</b>
2.50"-2.99" (6.35-7.59)	33,000 (146,784)	10" (25.40)	28" (71.12)	1 7/8" (4.76)	<b>03301019</b>
3.00"-3.49" (7.62-8.86)	41,000 (182,368)	10" (25.40)	30" (76.20)	1 7/8" (4.76)	<b>03301020</b>
3.50"-3.99" (8.89-10.13)	48,000 (213,504)	10" (25.40)	32" (81.28)	1 7/8" (4.76)	<b>03301021</b>
4.00"-4.49" (10.16-11.40)	48,000 (213,504)	10" (25.40)	33" (83.82)	1 7/8" (4.76)	<b>033011017</b>
<b>Standard</b>					
.50"-.62" (1.27-1.57)	5,600 (24,909)	5" (12.70)	16" (40.64)	7/8" (2.22)	<b>03301011</b>
.63"-.74" (1.60-1.88)	6,800 (30,246)	5" (12.70)	16" (40.64)	7/8" (2.22)	<b>03301012</b>
.75"-.99" (1.90-2.51)	9,600 (42,701)	6" (15.24)	32" (81.28)	1" (2.54)	<b>03301024</b>
1.00"-1.49" (2.54-3.78)	16,400 (72,947)	7" (17.78)	33" (83.82)	1 3/8" (3.49)	<b>03301025</b>
1.50"-1.99" (3.81-5.05)	16,400 (72,947)	7" (17.78)	34" (86.36)	1 3/8" (3.49)	<b>03301026</b>
2.00"-2.49" (5.08-6.32)	27,200 (120,986)	9" (22.86)	36" (91.44)	1 5/8" (4.13)	<b>03301027</b>
2.50"-2.99" (6.35-7.59)	33,000 (146,784)	10" (25.40)	38" (96.52)	1 7/8" (4.76)	<b>03301028</b>
3.00"-3.49" (7.62-8.86)	41,000 (182,368)	10" (25.40)	39" (99.06)	1 7/8" (4.76)	<b>03301029</b>
3.50"-3.99" (8.89-10.13)	48,000 (213,504)	10" (25.40)	41" (104.14)	1 7/8" (4.76)	<b>03301030</b>
4.00"-4.49" (10.16-11.40)	48,000 (213,504)	10" (25.40)	42" (106.68)	1 7/8" (4.76)	<b>03301031</b>
4.50"-4.99" (11.43-12.67)	48,000 (213,504)	10" (25.40)	58" (147.32)	1 7/8" (4.76)	<b>03301039</b>
5.00"-5.99" (12.70-15.21)	40,000 (177,920)	10" (25.40)	60" (152.40)	1 7/8" (4.76)	<b>03301047</b>
6.00"-6.99" (15.24-17.75)	48,000 (213,504)	10" (25.40)	66" (167.64)	1 7/8" (4.76)	<b>03301045</b>

Note: E- Eye length. M-Mesh length at nominal diameter.  
See page V-18 for multiple cables in a single pulling grip.

### Rotating Eye Dimensions

Rotating Eye Dimensions Inches (cm)	A	B	C	D	F
7/8" (2.22)	7/8" (2.22)	9/32" (.71)	1/2" (1.27)	7/8" (2.22)	2 5/8" (6.67)
1" (2.54)	1" (2.54)	1/2" (1.27)	9/16" (1.43)	1 3/16" (2.06)	3 1/2" (8.89)
1 3/8" (3.49)	1 3/8" (3.49)	1/2" (1.27)	1 1/16" (1.75)	1" (2.54)	4 1/2" (11.43)
1 5/8" (4.13)	1 5/8" (4.13)	9/16" (1.59)	7/8" (2.22)	1 3/16" (3.02)	5 5/16" (13.49)
1 7/8" (4.76)	1 7/8" (4.76)	2 1/32" (1.67)	1" (2.54)	1 3/8" (3.49)	6 1/8" (15.56)



Dimensions in Inches (mm)



## T-Type Grips

Kellems® Flexible T-Type Pulling Grips are made of high strength galvanized steel strand. They feature double weave mesh for positive holding power in medium to heavy pulling jobs. The grip eye will easily attach to a swivel.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

## Application

T-Type Pulling Grips are used for the installation of underground power cables, communication lines and service lines into factories, construction projects and for general underground electrical construction. Available in two mesh lengths, short for medium pulls and standard for general purpose pulling.

## Benefits

- Will pull a single cable or cable bundles
- Patented flexible eye design provides flexibility to follow line of pull
- A dependable, reusable pulling tool
- Easily installed and removed
- Mates easily with a swivel, see page V-16



## T-Type Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
<b>Short</b>				
.50"-.62" (1.27-1.57)	4,500 (20,016)	8" (20.32)	21" (53.34)	<b>033041082</b>
.63"-.74" (1.60-1.88)	5,600 (24,909)	8" (20.32)	24" (60.96)	<b>033041083</b>
.75"-.99" (1.90-2.51)	6,800 (30,246)	9" (22.86)	24" (60.96)	<b>033041084</b>
1.00"-1.49" (2.54-3.78)	9,600 (42,701)	9" (22.86)	24" (60.96)	<b>033041085</b>
1.50"-1.99" (3.81-5.05)	16,400 (72,947)	11" (27.94)	24" (60.96)	<b>033041086</b>
2.00"-2.49" (5.08-6.32)	18,500 (82,288)	12" (30.48)	24" (60.96)	<b>033041087</b>
2.50"-2.99" (6.35-7.59)	24,500 (108,976)	12" (30.48)	24" (60.96)	<b>033041088</b>
3.00"-3.49" (7.62-8.86)	24,500 (108,976)	14" (35.56)	24" (60.96)	<b>033041089</b>
3.50"-3.99" (8.89-10.13)	31,000 (137,888)	14" (35.56)	26" (66.04)	<b>033041090</b>
<b>Standard</b>				
.75"-.99" (1.90-2.51)	6,800 (30,246)	9" (22.86)	36" (91.44)	<b>033041091</b>
1.00"-1.49" (2.54-3.78)	9,600 (42,701)	9" (22.86)	36" (91.44)	<b>033041092</b>
1.50"-1.99" (3.81-5.05)	16,400 (72,947)	11" (27.94)	36" (91.44)	<b>033041093</b>
2.00"-2.49" (5.08-6.32)	18,500 (82,288)	12" (30.48)	36" (91.44)	<b>033041094</b>
2.50"-2.99" (6.35-7.59)	24,500 (108,976)	12" (30.48)	36" (91.44)	<b>033041095</b>
3.00"-3.49" (7.62-8.86)	24,500 (108,976)	14" (35.56)	36" (91.44)	<b>033041096</b>
3.50"-3.99" (8.89-10.13)	31,000 (137,888)	14" (35.56)	40" (101.60)	<b>033041097</b>

Note: E- Eye length. M-Mesh length at nominal diameter.

See page V-18 for multiple cables in a single pulling grip.

## Non-Conductive Grips


Kellems® Non-Conductive Pulling Grips, made of a high strength, non-conductive aramid fiber, are available for pulling single cable or cable bundles. Their braided double weave design adds strength and positive holding power.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Benefits

- Color coded for fast on-site selection
- Extra flexibility for easy installation
- Non-metallic mesh provides for safe pulls over "hot" areas
- Pellethane jacketed aramid fiber mesh resists abrasion
- Grips are corrosion resistant

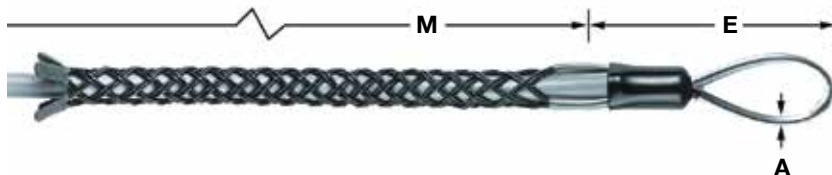

### Non-Conductive Grips, Single Eye, Double Weave, Non-Metallic

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	A Inches (cm)	Color Code	Catalog Number
.50"-.62" (1.27-1.57)	1,000 (4,448)	5.5" (13.97)	24" (60.96)	.44" (1.12)	Green	<b>03628001</b>
.63"-.74" (1.60-1.88)	2,000 (8,896)	5.5" (13.97)	26" (66.04)	.44" (1.12)	Yellow	<b>03628002</b>
.75"-.99" (1.90-2.51)	2,000 (8,896)	6.0" (15.24)	31" (78.74)	.63" (1.60)	Red	<b>03628003</b>
1.00"-1.24" (2.54-3.15)	3,000 (13,345)	6.5" (16.51)	36" (91.44)	.63" (1.60)	Blue	<b>03628004</b>
1.25"-1.49" (3.17-3.78)	3,000 (13,345)	6.7" (17.02)	41.5" (105.41)	.63" (1.60)	White	<b>03628005</b>
1.50"-1.99" (3.81-5.05)	3,000 (13,345)	8.0" (20.32)	44.0" (121.76)	.63" (1.60)	Pink	<b>03628006</b>

Note: E- Eye length. M-Mesh length at nominal diameter.


Taping is required to guard against accidental release and to insure maximum reliability. Apply vinyl plastic electrical tape starting 2" to 3" (5.08cm to 7.62cm) from the tail of the grip onto 2" to 3" (5.08cm to 7.62cm) of cable.

## Slack Pulling Grips

Slack Pulling Grips are offered in three styles made of galvanized steel. The closed type is used when the cable end is accessible. When not accessible, there are split lace and split rod closing styles. All grips feature a single offset eye for easy attachment to a pulling line.

### Benefits

- Easy attachment to pulling lines
- Galvanized steel for strength

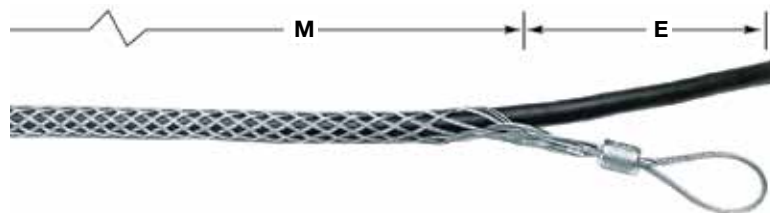

### Slack Grip-Closed Mesh, Offset Eye, Double Weave, Galvanized Steel

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.75"-.99" (1.90-2.51)	2,600 (11,565)	7" (17.78)	12" (30.48)	<b>03308003</b>
1.00"-1.24" (2.54-3.15)	4,000 (17,792)	8" (20.32)	15" (38.10)	<b>03308004</b>
1.25"-1.49" (3.17-3.78)	5,400 (24,019)	8" (20.32)	16" (40.64)	<b>03308005</b>
1.50"-1.74" (3.81-4.42)	6,600 (29,357)	8" (20.32)	20" (50.80)	<b>03308006</b>
1.75"-1.99" (4.44-5.05)	10,000 (44,480)	10" (25.40)	18" (45.72)	<b>03308007</b>
2.00"-2.49" (5.08-6.32)	11,000 (48,928)	10" (25.40)	19" (48.26)	<b>03308008</b>
2.50"-2.99" (6.35-7.59)	11,000 (48,928)	10" (25.40)	20" (50.80)	<b>03308009</b>
3.00"-3.49" (7.62-8.86)	14,500 (64,496)	12" (30.48)	21" (53.34)	<b>03308010</b>
3.50"-3.99" (8.89-10.13)	14,500 (64,496)	12" (30.48)	22" (55.88)	<b>03308011</b>

Note: E- Eye length. M-Mesh length at nominal diameter.

See page V-18 for multiple cables in a single pulling grip.

Dimensions in Inches (mm)



## Slack Pulling Grips


Slack Pulling Grips are offered in three styles made of galvanized steel. The closed type is used when the cable end is accessible. When not accessible, there are split lace and split rod closing styles. All grips feature a single offset eye for easy attachment to a pulling line.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Benefits

- Easy attachment to pulling lines
- Reusable rawhide lace for lace closure
- Galvanized steel for strength

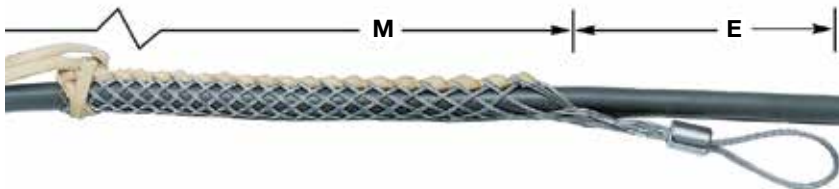


### Slack Grip-Split Mesh, Rawhide Lace Closing, Offset Eye, Double Weave, Galvanized Steel

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
<b>Standard</b>				
.75"-1.99" (1.90-2.51)	2,500 (11,120)	7" (17.78)	12" (30.48)	<b>03309003</b>
1.00"-1.24" (2.54-3.15)	3,500 (15,568)	8" (20.32)	15" (38.10)	<b>03309004</b>
1.25"-1.49" (3.17-3.78)	4,000 (17,792)	8" (20.32)	16" (40.64)	<b>03309005</b>
1.50"-1.74" (3.81-4.42)	4,000 (17,792)	9" (22.86)	17" (43.18)	<b>03309006</b>
1.75"-1.99" (4.44-5.05)	4,000 (17,792)	10" (25.40)	18" (45.72)	<b>03309007</b>
2.00"-2.49" (5.08-6.32)	4,000 (17,792)	10" (25.40)	19" (48.26)	<b>03309008</b>
2.50"-2.99" (6.35-7.59)	4,000 (17,792)	10" (25.40)	20" (50.80)	<b>03309009</b>
<b>Long</b>				
1.50"-1.99" (3.81-5.05)	4,000 (17,792)	9" (22.86)	25" (63.50)	<b>03309015</b>
2.00"-2.49" (5.08-6.32)	4,000 (17,792)	10" (25.40)	26" (66.04)	<b>03309016</b>
2.50"-2.99" (6.35-7.59)	4,000 (17,792)	10" (25.40)	29" (73.66)	<b>03309017</b>
3.00"-3.49" (7.62-8.86)	4,000 (17,792)	12" (30.48)	32" (81.28)	<b>03309018</b>
3.50"-3.99" (8.89-10.13)	4,000 (17,792)	12" (30.48)	35" (88.90)	<b>03309019</b>

### Benefits

- Easy attachment to pulling lines
- Galvanized steel for strength

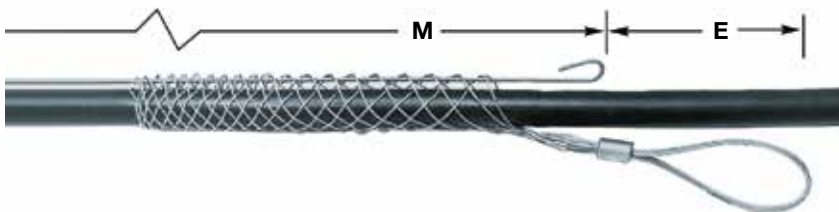

### Slack Grip-Split Mesh, Rod Closing, Offset Eye, Single Weave, Galvanized Steel

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.50"-1.61" (1.27-1.55)	1,500 (6,672)	7" (17.78)	6" (15.24)	<b>03310001</b>
.62"-1.74" (1.57-1.88)	1,800 (8,006)	7" (17.78)	8" (20.32)	<b>03310002</b>
.75"-1.99" (1.90-2.51)	2,200 (9,786)	7" (17.78)	10" (25.40)	<b>03310003</b>
1.00"-1.24" (2.54-3.15)	3,400 (15,123)	8" (20.32)	12" (30.48)	<b>03310004</b>
1.25"-1.49" (3.17-3.78)	4,500 (20,016)	8" (20.32)	14" (35.56)	<b>03310005</b>
1.50"-1.74" (3.81-4.42)	5,800 (25,798)	9" (22.86)	15" (38.10)	<b>03310006</b>
1.75"-1.99" (4.44-5.05)	7,600 (33,805)	10" (25.40)	16" (40.64)	<b>03310007</b>
2.00"-2.49" (5.08-6.32)	9,000 (40,032)	10" (25.40)	19" (48.26)	<b>03310008</b>
2.50"-2.99" (6.35-7.59)	11,000 (48,928)	10" (25.40)	20" (50.80)	<b>03310009</b>
3.00"-3.49" (7.62-8.86)	12,000 (53,376)	12" (30.48)	21" (53.34)	<b>03310010</b>
3.50"-3.99" (8.89-10.13)	12,000 (53,376)	12" (30.48)	24" (60.96)	<b>03310011</b>

Note: E- Eye length. M-Mesh length at nominal diameter.

1. Replacement rawhide lace. Catalog number 20920002.
  2. See page V-35 for lace and rod closing instructions.
- See page V-18 for multiple cables in a single pulling grip.

Dimensions in Inches (mm)

## Light Duty Grips


Light Duty Grips are made of galvanized steel in a single weave construction. They feature a flexible eye for easy attachment to a pulling line.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Benefits

- Perfect tools for light pulling jobs
- Installs easily on cable
- Strong galvanized steel construction

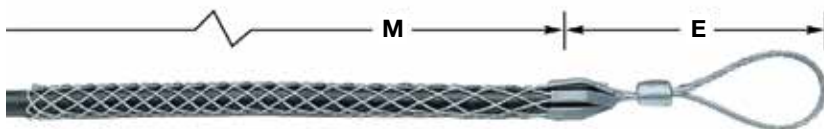

### Light Duty Grips


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
<b>Short</b>				
.50"-.62" (1.27-1.57)	2,800 (12,454)	5" (12.70)	11" (27.94)	<b>03303001</b>
.63"-.74" (1.60-1.88)	2,800 (12,454)	5" (12.70)	11" (27.94)	<b>03303002</b>
.75"-.99" (1.90-2.51)	4,000 (17,792)	6" (15.24)	12" (30.48)	<b>03303003</b>
1.00"-1.24" (2.54-3.15)	5,300 (23,574)	7" (17.78)	13" (33.02)	<b>03303004</b>
1.25"-1.49" (3.17-3.78)	5,300 (23,574)	7" (17.78)	14" (35.56)	<b>03303005</b>
1.50"-1.74" (3.81-4.42)	6,800 (30,246)	8" (20.32)	15" (38.10)	<b>03303006</b>
1.75"-1.99" (4.44-5.05)	8,500 (37,808)	9" (22.86)	17" (43.18)	<b>03303007</b>
2.00"-2.49" (5.08-6.32)	8,500 (37,808)	9" (22.86)	18" (45.72)	<b>03303008</b>
<b>Standard</b>				
.50"-.62" (1.27-1.57)	2,800 (12,454)	5" (12.70)	16" (40.64)	<b>03303010</b>
.63"-.74" (1.60-1.88)	2,800 (12,454)	5" (12.70)	16" (40.64)	<b>03303011</b>
.75"-.99" (1.90-2.51)	4,000 (17,792)	6" (15.24)	20" (50.80)	<b>03303012</b>
1.00"-1.24" (2.54-3.15)	6,800 (30,246)	7" (17.78)	20" (50.80)	<b>03303013</b>
1.25"-1.49" (3.17-3.78)	6,800 (30,246)	7" (17.78)	21" (53.34)	<b>03303015</b>
1.50"-1.99" (3.81-5.05)	6,800 (30,246)	8" (20.32)	23" (58.42)	<b>03303016</b>
2.00"-2.49" (5.08-6.32)	8,500 (37,808)	9" (22.86)	25" (63.50)	<b>03303017</b>
2.50"-2.99" (6.35-7.59)	10,600 (47,149)	9" (22.86)	27" (68.58)	<b>03303018</b>
3.00"-3.49" (7.62-8.86)	14,700 (65,386)	10" (25.40)	30" (76.20)	<b>03303019</b>
3.50"-3.99" (8.89-10.13)	14,700 (65,386)	10" (25.40)	32" (81.28)	<b>03303029</b>

## Junior Pulling Grips

Junior Pulling Grips feature a strong galvanized steel, single weave mesh. A flexible eye easily attaches to a pulling line, snake or fish tape.

### Benefits

- Installs easily over building wire
- Strong secure grip
- Reusable
- Pulls single cable or cable bundles

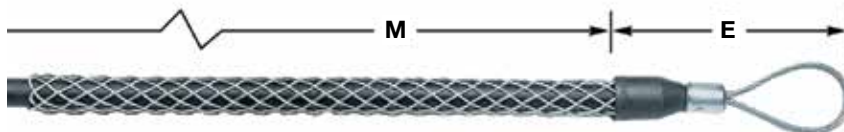

### Junior Pulling Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Model	Catalog Number
.19"-.24" (.48-.61)	400 (1,779)	3¼" (8.25)	4¼" (10.79)	J19	<b>03305011*</b>
.25"-.37" (.63-.94)	450 (2,002)	3¼" (8.25)	4¼" (10.79)	J25	<b>03305001</b>
.38"-.49" (.97-1.24)	900 (4,003)	3¾" (9.52)	7" (17.78)	J37	<b>03305002</b>
.50"-.62" (1.27-1.57)	1,300 (5,782)	4¼" (10.79)	8½" (21.59)	J50	<b>03305003</b>
.63"-.74" (1.60-1.88)	1,950 (8,674)	5" (12.70)	10" (25.40)	J62	<b>03305004</b>
.75"-.99" (1.90-2.51)	2,800 (12,454)	5¾" (14.60)	10" (25.40)	J75	<b>03305005</b>
1.00"-1.24" (2.54-3.15)	3,900 (17,347)	6½" (16.51)	11½" (29.21)	J100	<b>03305006</b>
Junior Grip Kit contains 6 grips, one of each size above, except 03305011.					<b>033051114</b>

Note: E- Eye length. M-Mesh length at nominal diameter.

\*Not included in Junior Grip Kit, 033051114.

See page V-18 for multiple cables in a single pulling grip.

Dimensions in Inches (mm)



## Wire Rope Grips

Wire Rope Grips are made of high strength galvanized steel strand in a construction of triple, double and single weave for superior gripping ability. They are available with or without a rotating barrel which will help eliminate twist in the old rope from being transferred to the new rope.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Benefits

- High strength for secure pulling
- Easy installation
- Flexible to pass through sheaves and blocks

### Application

Wire Rope Grips are used for changing wire rope on oil derricks, large cranes, overhead cranes and drag lines. It provides a quick, safe, inexpensive temporary splice. By installing the used wire rope in one end and the new rope in the other, the new wire rope can be pulled in as the old one is pulled out.



### Regular Wire Rope Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	Approx. Strength of Grip Feet (m)	Catalog Number
9/16" - 5/8" (1.43-1.59)	7,500 (33,360)	5.75 (1.75)	<b>03316001</b>
3/4" - 7/8" (1.90-2.22)	12,500 (55,600)	6.75 (1.90)	<b>03316002</b>
1" - 1 1/8" (2.54-2.86)	16,000 (71,168)	7.00 (2.13)	<b>03316003</b>
1 1/4" - 1 3/8" (3.17-3.49)	20,000 (88,960)	8.00 (2.44)	<b>03316004</b>
1 3/8" - 1 1/2" (3.49-3.81)	20,000 (88,960)	8.00 (2.44)	<b>03316006</b>



### Rotating Wire Rope Grips

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	Approx. Strength of Grip Feet (m)	Barrel Dimensions Length. x O.D. In. (cm)	Catalog Number
7/16" - 1/2" (1.11-1.27)	5,000 (22,240)	5.33 (1.63)	3.00" (7.62) x .87" (2.21)	<b>03317001</b>
9/16" - 5/8" (1.43-1.59)	7,500 (33,360)	5.83 (1.78)	4.25" (10.79) x 1.00" (2.54)	<b>03317002</b>
3/4" - 7/8" (1.90-2.22)	12,500 (55,600)	6.50 (1.98)	4.25" (10.79) x 1.00" (2.54)	<b>03317003</b>
1" - 1 1/8" (2.54-2.86)	16,000 (71,168)	8.67 (2.64)	5.50" (13.97) x 1.37" (3.48)	<b>03317004</b>
1 1/4" - 1 3/8" (3.17-3.49)	20,000 (88,960)	9.00 (2.74)	5.50" (13.97) x 1.37" (3.48)	<b>03317005</b>
1 1/2" - 1 3/4" (3.81-4.44)	20,000 (88,960)	11.00 (3.35)	5.50" (13.97) x 1.37" (3.48)	<b>03317006</b>

Note: 1. During installation each end of the grip should be banded and taped down securely over the rope to insure smooth passage through sheaves and to guard against accidental release. See page V-16 for end bands.  
2. The rotating barrel is not a swivel and will not turn while under tension. It can turn to relieve pulling torque when tension is relaxed.

Dimensions in Inches (mm)

## Cable Splicing Grips

Splicing Grips are made of galvanized steel in double weave mesh construction. They are available in various lengths and sizes to suit most applications.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Benefits

- Easily installed or removed
- Galvanized steel construction for strength
- Flexible to follow cable path

### Application

Splicing Grips are used as a temporary splice for rope, cable or wire rope. They can also be used as cable reinforcement and can act as a shield to protect cables and hoses from abrasion.



### Double Weave Splicing Grips

Cable Diameter Range Inches (cm)	.37"-.49" (.94-1.24)	.50"-.61" (1.27-1.55)	.62"-.74" (1.57-1.88)	.75"-.99" (1.90-2.51)	1.00"-1.49" (2.54-3.78)
Approx. Breaking Strength Lbs. (N)	3,500 (15,568)	3,500 (15,568)	4,400 (19,571)	7,500 (33,360)	10,000 (44,480)
Mesh Length Inches (cm)	Catalog Number				
18" (45.72)	<b>013041330</b>	<b>01304064</b>	<b>01304009</b>	—	—
24" (60.96)	—	<b>01304011</b>	<b>01304013</b>	<b>01304010</b>	<b>01304015</b>
36" (91.44)	—	—	<b>013041234</b>	<b>01304054</b>	<b>01304055</b>
48" (121.92)	—	—	—	<b>01304017</b>	<b>01304029</b>
72" (182.88)	—	—	—	<b>01304037</b>	<b>013041333</b>

### Junior Splicing Grips, Single Weave

Junior Splicing Grips are made of galvanized steel and are designed for use in very light duty and small splicing jobs.

### Benefits

- Easily installed or removed
- Galvanized steel construction for strength
- Flexible to follow cable path



### Junior Tube

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	Length @ Nom Diameter Inches (cm)	Catalog Number
.18"-.24" (.46-.61)	400 (1,779)	7" (17.78)	<b>01301008</b>
.25"-.36" (.63-.91)	400 (1,779)	8" (20.32)	<b>01301013</b>

Note: 1. During installation each end of the grip should be banded and taped down securely over the rope to insure smooth passage through sheaves and to guard against accidental release. See page V-16 for end bands.

Dimensions in Inches (mm)



## Punch-Lok® Bands

Punch-Lok Bands are applied over the tail of a grip to prevent the mesh from being tripped or pulled loose. Also, they assure full gripping action by locking the mesh of the tail in tight contact with the cable or rope.



When the tail of a grip is the leading end, the bands are particularly important to prevent accidental release caused by tripping on obstructions. A conductor-to-conductor (double-socking) pulling operation is a good example: where two grips connect two conductors to form a temporary splice. Bands should be applied to the ends of the grips as illustrated herein. It is also common practice to tape over the banded tail area to assure smooth passage through the sheaves. The conductor should be installed in the grip up to the elbows of the aluminum shoulders in order to assure full and complete gripping action as illustrated above.



### Punch-Lok® Bands

Grip Banding Range Inches (cm)	Band Width Inches (cm)	Band Inside Diameter Inches (cm)	Model	Catalog Number
¼"-1½" (.63-2.86)	¾" (.95)	1¾" (3.49)	0-311	<b>20320050</b>
1½"-1¾" (2.86-4.13)	¾" (.95)	2" (5.08)	0-316	<b>20320051</b>
1¾"-2¼" (4.13-5.71)	¾" (1.59)	2½" (6.35)	0-10	<b>20320052</b>
2¼"-3½" (5.71-8.89)	¾" (1.59)	4" (10.16)	0-16	<b>20320053</b>
3½"-5" (8.89-12.70)	¾" (1.59)	6" (15.24)	0-24	<b>20320054</b>


### Accessories

Punch-Lok Tools	Catalog Number
P-1000 for use with ¾" width Banding tool.	<b>20320048</b>
P-38 for use with ¾" and ¾" width Banding tool for tight spaces.	<b>20320047</b>

*Note: In all cases two Punch-Lok Bands should be double wrapped approximately one inch to two inches (2.54cm to 5.08cm) from the grip's tail. Banding is required to ensure maximum reliability and guard against accidental release.*

## Stainless Steel Swivels

Swivels are essential to the efficiency and safety of any high tension application. They are particularly important where continuous pulls develop higher and higher torque levels. Torque is intensified by the pull-resistance of the cable itself and the resistance of the high tension controlling equipment regulating line sag. Ball bearing swivels release torque and prevent it from reaching dangerous levels that can damage the cable and obstruct the lines.

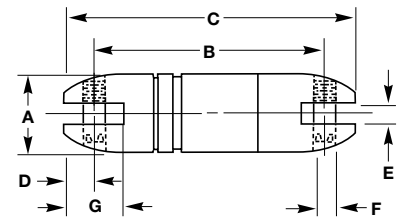

### Stainless Steel Swivels



Maximum Safe Working Load Lbs. (N)	Dimensions in Inches (cm)							Model	Catalog Number
	A	B	C	D	E	F	G		
2,250 (10,000)	7/8" (2.22)	2½" (6.35)	3¾" (8.57)	7/16" (1.11)	3/8" (0.95)	5/16" (0.79)	3¼" (2.46)	A-13L	<b>20308001A</b>
5,000 (22,240)	1¼" (3.17)	3¼" (9.37)	4¾" (12.06)	1¾" (1.35)	1¾" (1.35)	13/32" (1.03)	1¾" (3.25)	BB-13L	<b>20308002A</b>
9,000 (40,030)	1½" (3.81)	4¼" (10.79)	5¾" (14.29)	1¼" (1.75)	1¾" (1.51)	½" (1.27)	1¾" (3.97)	B-13L	<b>20308003A</b>
10,000 (44,480)	1¾" (4.13)	4½" (11.43)	6" (15.24)	¾" (1.90)	1¼" (1.75)	5/8" (1.59)	1¾" (4.36)	C-13L	<b>20308004A</b>
30,000 (133,440)	2¾" (6.03)	7¾" (19.37)	10" (25.40)	1¾" (3.02)	1¾" (2.62)	7/8" (2.22)	2¾" (7.06)	D-13L	<b>20308005A</b>

*Punch-Lok® is a registered trademark of Punch-Lok Inc.*





Kellems Pulling Grips are reusable tools for pulling electrical cable, bare conductor or rope. They are easy and fast to install, providing the user with a smooth, slim profile that allows for easy passage through ducts and conduit. Kellems Pulling Grips are made of the highest quality galvanized steel strand which assures the user of a long lasting grip. There is a Kellems Pulling Grip for every pulling job.

**WARNING:** It is very important to read and understand all safety information before proceeding. Failure to do so may result in property damage, personal injury or death.

Grips are to be installed and utilized by a qualified technician in accordance with all applicable national and local safety and electrical codes. Consult a licensed project safety professional, if necessary.

Ensure that the correct grip is selected for your specific needs. Grips should only be used for their intended purpose and not for other applications.

Banding the tail end of the grip is required to prevent unintended release of the grip's hold from the cable and to achieve maximum gripping strength

The strength of a Kellems grips is based on laboratory testing and does not evaluate variable conditions such as cable type, gripping surfaces, cable movement or impact loads. Suitability for the application must be determined by the user.

Thoroughly examine the condition of the grip prior to each use. Grips that are worn, bent, corroded, or show other signs of damage, such as frayed or broken wires, should never be used and must be replaced.

Do not modify the grip in any way.

Ensure that the recommended work load of the grip is suitable for the application. Never use a grip beyond its safe working load, which is the approximate breaking strength divided by the factor of safety. The recommended factor of safety is five (5) for pulling grips and ten (10) for support grips.

Pulling hardware should only be attached to the eye of the grip.

A swivel is recommended for attachment to the grip's eye in applications where torque release is necessary. Torque can build up in high tension pulling applications.

Do not run grips and swivels around sheaves or bull wheels while under tension.

For synthetic rope, use Kellems Dua-Pull Grips only.

## Select The Correct Pulling Grip

Each Kellems Grip is designed to work on a specific range of cable diameters.

**Step 1** Refer to the chart below to determine the style of grip best suited for your application.

**Step 2** Determine your cable outside diameter.

**Step 3** Find the grip size that encompasses your cable diameter.

**Step 4** Estimate the tension to be put on the grip, establish the working load you require and compare this to the listed approximate breaking strength of the grip to insure that the grip will be strong enough. Refer to page V-34 for safety and working load factors.

## Pulling Grip Selection Chart


Grip Style	Application	Page Number
DUA-PULL®, flexible eye	Extra high strength overhead transmission line stringing for bare or insulated conductor and synthetic rope.	V-7
Multiple strength, flexible eye	Normal overhead transmission and distribution line stringing for bare or insulated conductor.	V-8
Multiple strength, rotating eye	Normal overhead transmission and distribution line stringing for bare or insulated conductor.	V-8
K-type grip, rotating eye	Underground power cables and communication lines. Service lines into factories.	V-9
T-type grip, flexible eye	Underground power cables and communication lines. Service lines into factories.	V-10
Non-conductive, flexible eye	Pull insulated distribution cable into place.	V-11
Slack pulling, closed mesh	Remove underground cable. For pulling slack in final placement of new cable when end of cable is available.	V-11
Slack pulling, split mesh,	Remove underground cable. For pulling slack in final placement of new cable rawhide lace closing when end of cable is not available.	V-12
Slack pulling, split mesh,	Remove underground cable. For pulling slack in final placement of new cable rod closing when end of cable is not available, with rod closing for quick installation.	V-12
Light duty, flexible eye	Light pulling, underground electrical construction. Industrial plant wiring and rewiring jobs.	V-13
Junior, flexible eye	Connect bundled insulated building wire to a pulling tape. Pull wire through conduit.	V-13
Regular and rotating wire rope	Restraining wire rope in cranes and oil rigs.	V-14
Splicing	Temporary splice for cable or wire rope.	V-15
Pulling Grip Accessories	Tools, bands, swivels.	V-16
Fiber Optic Cable Pulling Grips	Pull fiber optic cable into place overhead, underground or through duct and conduit.	V-39 to V-43



## Multiple Cable Selection Charts for Cables and Wires of Unequal Diameters

### How to choose the correct grip size:

1. Find the Grip Circumference Range by measuring the circumference of the bundle of different diameter cables to be gripped (see illustration).
2. Divide the bundle circumference by 3.14 to determine the diameter.
3. Choose a grip offering a range of cable diameters the same as the cable diameter.

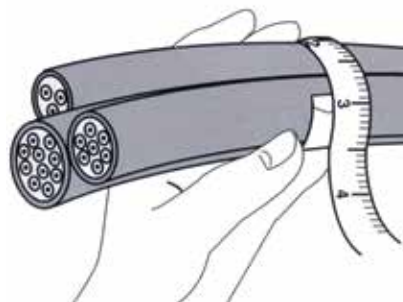

### For Pulling Grips\*

**CAUTION:** When a grip is used on multiple cables, the tail end of the grip should be banded after positioning on the cables.

### For Cables of Equal Diameters

Under "Number of Cables in One Grip", find the diameter of your single cable in vertical column. Read the grip diameter range to the right.

If your diameter is the maximum of the range shown, go to the next larger size for Split Grips, stay with the same size for Closed Grips.

**Example:** Three cables, each with .89" (2.26cm) diameter, for a Closed Grip select the 1.50"-1.74" (3.81cm-4.42cm) range, for a Split Grip select the 1.75"-1.99" (4.44cm-5.05cm) range.

### Number of Cables in One Grip

2	3	4	5	6 and 7	8	9	Grip Dia. Range Inches (cm)
.30-.38 (.76-.97)	.25-.31 (.63-.79)	.22-.27 (.56-.69)	.19-.24 (.48-.60)	.17-.22 (.43-.56)	.15-.19 (.38-.48)	.14-.18 (.36-.46)	.50-.61 (1.27-1.55)
.38-.44 (.97-1.12)	.31-.36 (.79-.91)	.27-.31 (.69-.79)	.24-.29 (.61-.74)	.22-.26 (.56-.66)	.19-.23 (.48-.58)	.18-.21 (.46-.53)	.62-.74 (1.57-1.88)
.44-.59 (1.12-1.50)	.36-.49 (.91-1.24)	.31-.42 (.79-1.07)	.29-.38 (.74-.97)	.26-.34 (.66-.86)	.23-.31 (.58-.79)	.21-.28 (.53-.71)	.75-.99 (1.90-2.51)
.59-.75 (1.50-1.90)	.49-.63 (1.24-1.60)	.42-.54 (1.07-1.37)	.38-.48 (.97-1.22)	.34-.43 (.86-1.09)	.31-.39 (.79-.99)	.28-.35 (.71-.89)	1.00-1.24 (2.54-3.15)
.75-.90 (1.90-2.29)	.63-.76 (1.60-1.93)	.54-.65 (1.37-1.65)	.48-.58 (1.22-1.47)	.43-.52 (1.09-1.32)	.39-.46 (.99-1.17)	.35-.42 (.89-1.07)	1.25-1.49 (3.17-3.78)
.90-1.07 (2.29-2.72)	.76-.89 (1.93-2.26)	.65-.77 (1.65-1.96)	.58-.67 (1.47-1.70)	.52-.60 (1.32-1.52)	.46-.54 (1.17-1.37)	.42-.49 (1.07-1.24)	1.50-1.74 (3.81-4.42)
1.07-1.22 (2.72-3.10)	.89-1.02 (2.26-2.59)	.77-.88 (1.96-2.24)	.67-.77 (1.70-1.96)	.60-.69 (1.52-1.75)	.54-.62 (1.37-1.57)	.49-.56 (1.24-1.42)	1.75-1.99 (4.44-5.05)
1.22-1.53 (3.10-3.89)	1.02-1.28 (2.59-3.25)	.88-1.10 (2.24-2.79)	.77-.96 (1.96-2.44)	.69-.86 (1.75-2.18)	.62-.77 (1.57-1.96)	.56-.71 (1.42-1.80)	2.00-2.49 (5.08-6.32)
1.53-1.83 (3.89-4.65)	1.28-1.53 (3.25-3.89)	1.10-1.32 (2.79-3.35)	.96-1.16 (2.44-2.95)	.86-1.03 (2.18-2.62)	.77-.93 (1.96-2.36)	.71-.85 (1.80-2.16)	2.50-2.99 (6.35-7.59)
1.83-2.14 (4.65-5.44)	1.53-1.79 (3.89-4.55)	1.32-1.54 (3.35-3.91)	1.16-1.35 (2.95-3.43)	1.03-1.20 (2.62-3.05)	.93-1.08 (2.36-2.74)	.85-.99 (2.16-2.51)	3.00-3.49 (7.62-8.86)
2.14-2.44 (5.44-6.20)	1.79-2.05 (4.55-5.21)	1.54-1.76 (3.91-4.47)	1.35-1.54 (3.43-3.91)	1.20-1.37 (3.05-3.48)	1.08-1.24 (2.74-3.15)	.99-1.13 (2.51-2.87)	3.50-3.99 (8.89-10.13)
2.44-2.75 (6.20-6.98)	2.05-2.30 (5.21-5.84)	1.76-1.98 (4.47-5.03)	1.54-1.74 (3.91-4.42)	1.37-1.55 (3.48-3.94)	1.24-1.39 (3.15-3.53)	1.13-1.27 (2.87-3.23)	4.00-4.49 (10.16-11.40)
2.75-3.06 (6.98-7.77)	2.30-2.56 (5.84-6.50)	1.98-2.20 (5.03-5.59)	1.74-1.93 (4.42-4.90)	1.55-1.72 (3.94-4.37)	1.39-1.55 (3.53-3.94)	1.27-1.41 (3.23-3.58)	4.50-4.99 (11.43-12.67)

Note: \*This chart is not to be used for Conduit Riser Grips. Refer to the chart for Conduit Riser multiple cable section. It is always recommended that, when multiple cables are installed in a pulling grip, the tail end be banded and tightly taped after installation on the cable bundle. See page V-16 for end bands.



## Features and Benefits

### Kellems® Support Grips

They are used to hold the weight of electrical cable as it hangs in a vertical, sloping or horizontal position. Electrical cable must be supported, or its dead weight can cause excessive strain or pullout at the connections resulting in power failure. Support grips also absorb additional strain from flexure, vibration, expansion and contraction.

Kellems support grips listed in this catalog are made of high grade, non-magnetic tin-coated bronze strand. Stainless steel grips, made of alloy 302–304 series stainless are for severe service or unusual environmental conditions. For exceptional immunity to rust and corrosion with superior strength and flexibility for heavy duty support application in harsh environments available upon request; contact the factory.



02206010



#### Mesh Grip

- The positive action mesh grip is designed for light duty up to heavy duty; closed grips fit over the cable end, split grips wrap around the cable mid-span
- The endless weave provides easy installation onto cable and can be easily repositioned



#### Eye Styles

- Four eye styles available: single (shown), double, universal and offset
- Solid eye assemblies provide eye reinforcement at support hardware
- Each Kellems grip is designed to work on a specific range of cable diameters



#### Cable Identification

- Identification tag shows: catalog number, diameter range, agency approval and bar code
- The strand equalizer positions wires for equal loading throughout the entire grip length



#### Strand Equalizer

- Positions wires for equal loading throughout the entire grip length



## Standard Duty Support Grips


Single Eye, Single Weave, Tin-Coated Bronze and Stainless Steel

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Single Eye, Closed Mesh


For permanent support when cable end is available to be installed through grip.

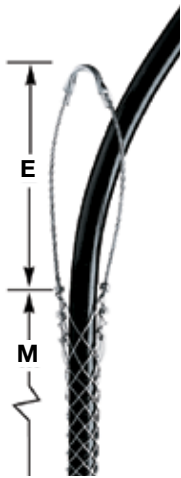

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	530 (2,357)	1,370 (6,094)	7" (17.78)	10" (25.40)	<b>02201013</b>	<b>02401013</b>
.63"- .74" (1.60-1.88)	790 (3,514)	2,060 (9,163)	8" (20.32)	10" (25.40)	<b>02201014</b>	<b>02401014</b>
.75"- .99" (1.90-2.51)	1,020 (4,537)	2,060 (9,163)	8" (20.32)	13" (33.02)	<b>02201015</b>	<b>02401015</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,678 (11,912)	9" (22.86)	14" (35.56)	<b>02201017</b>	<b>02401017</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,490 (19,972)	10" (25.40)	15" (38.10)	<b>02201018</b>	<b>02401018</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	4,492 (19,981)	12" (30.48)	17" (43.18)	<b>02201019</b>	<b>02401019</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	5,000 (22,241)	14" (35.56)	19" (48.26)	<b>02201020</b>	<b>02401020</b>
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	8,940 (39,767)	16" (40.64)	21" (53.34)	<b>02201021</b>	<b>02401021</b>
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	8,947 (39,798)	18" (45.72)	23" (58.42)	<b>02201022</b>	<b>02401022</b>
3.00"-3.49" (7.62-8.86)	4,900 (21,795)	13,420 (59,695)	21" (53.34)	25" (63.50)	<b>02201023</b>	<b>02401023</b>
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	—	24" (60.96)	27" (68.58)	<b>02201024</b>	—

### Single Eye, Split Mesh, Lace Closing


For permanent support when cable end is not available.

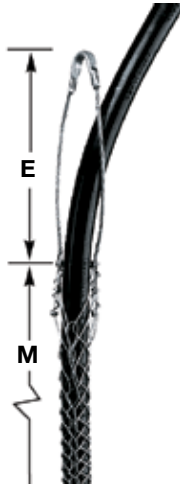

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	530 (2,357)	1,370 (6,094)	7" (17.78)	10" (25.40)	<b>02202013</b>	<b>02402013</b>
.63"- .74" (1.60-1.88)	790 (3,514)	2,066 (9,190)	8" (20.32)	10" (25.40)	<b>02202014</b>	<b>02402014</b>
.75"- .99" (1.90-2.51)	1,020 (4,537)	2,060 (9,163)	8" (20.32)	13" (33.02)	<b>02202015</b>	<b>02402015</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,670 (11,876)	9" (22.86)	14" (35.56)	<b>02202017</b>	<b>02402017</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,490 (19,972)	10" (25.40)	15" (38.10)	<b>02202018</b>	<b>02402018</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	4,490 (19,972)	12" (30.48)	17" (43.18)	<b>02202019</b>	<b>02402019</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	4,375 (19,461)	14" (35.56)	19" (48.26)	<b>02202020</b>	<b>02402020</b>
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	8,947 (39,798)	16" (40.64)	21" (53.34)	<b>02202021</b>	<b>02402021</b>
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	8,940 (39,767)	18" (45.72)	23" (58.42)	<b>02202022</b>	<b>02402022</b>
3.00"-3.49" (7.62-8.86)	4,900 (21,795)	13,420 (59,695)	21" (53.34)	25" (63.50)	<b>02202023</b>	<b>02402023</b>
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	13,420 (59,695)	24" (60.96)	27" (68.58)	<b>02202024</b>	<b>02402024</b>

### Single Eye, Split Mesh, Rod Closing

For support when cable end is not available.

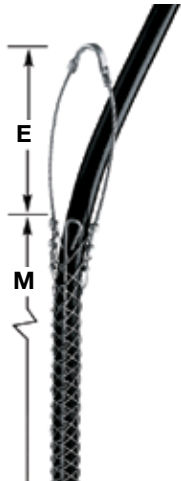

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	790 (3,514)	1,050 (4,670)	7" (17.78)	8.5" (21.59)	<b>02203013</b>	<b>02403013</b>
.63"- .74" (1.60-1.88)	790 (3,514)	2,050 (9,119)	8" (20.32)	8.5" (21.59)	<b>02203014</b>	<b>02403014</b>
.75"- .99" (1.90-2.51)	1,020 (4,537)	2,050 (9,119)	8" (20.32)	10.5" (26.67)	<b>02203015</b>	<b>02403015</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,650 (11,788)	9" (22.86)	12.5" (31.75)	<b>02203017</b>	<b>02403017</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,500 (20,017)	10" (25.40)	14.5" (36.83)	<b>02203018</b>	<b>02403018</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	4,500 (20,017)	12" (30.48)	15.5" (39.37)	<b>02203019</b>	<b>02403019</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	6,000 (26,689)	14" (35.56)	16.5" (41.91)	<b>02203020</b>	<b>02403020</b>
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	8,950 (39,812)	16" (40.64)	19.5" (49.53)	<b>02203021</b>	<b>02403021</b>
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	7,750 (34,474)	18" (45.72)	21.5" (54.61)	<b>02203022</b>	<b>02403022</b>
3.00"-3.49" (7.62-8.86)	5,750 (25,576)	8,500 (37,810)	21" (53.34)	23.5" (59.69)	<b>02203023</b>	<b>02403023</b>
3.50"-3.99" (8.89-10.13)	5,750 (25,576)	—	24" (60.96)	25.5" (64.77)	<b>02203024</b>	—

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)

## Standard Duty Support Grips

Double Eye, Single Weave, Tin-Coated Bronze and Stainless Steel


### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Double Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"-.62" (1.27-1.57)	530 (2,357)	1,370 (6,094)	4" (10.16)	10" (25.40)	<b>02201001</b>	<b>02401001</b>
.63"-.74" (1.60-1.88)	790 (3,514)	2,060 (9,163)	4" (10.16)	10" (25.40)	<b>02201002</b>	<b>02401002</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	2,060 (9,163)	4" (10.16)	13" (33.02)	<b>02201003</b>	<b>02401003</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,670 (11,877)	5" (12.70)	14" (35.56)	<b>02201005</b>	<b>02401005</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,490 (19,972)	5" (12.70)	15" (38.10)	<b>02201006</b>	<b>02401006</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	4,490 (19,972)	5" (12.70)	17" (43.18)	<b>02201007</b>	<b>02401007</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	5,000 (22,241)	6" (15.24)	19" (48.26)	<b>02201008</b>	<b>02401008</b>
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	8,940 (39,767)	6" (15.24)	21" (53.34)	<b>02201009</b>	<b>02401009</b>
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	8,940 (39,767)	6" (15.24)	23" (58.42)	<b>02201010</b>	<b>02401010</b>
3.00"-3.49" (7.62-8.86)	4,900 (21,795)	12,000 (53,379)	8" (20.32)	25" (63.50)	<b>02201011</b>	<b>02401011</b>
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	12,000 (53,379)	8" (20.32)	27" (68.58)	<b>02201012</b>	<b>02401012</b>

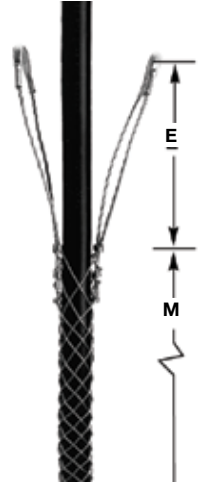

### Double Eye, Split Mesh, Lace Closing

For permanent support when cable end is not available.


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"-.62" (1.27-1.57)	530 (2,357)	—	4" (10.16)	10" (25.40)	<b>02202001</b>	—
.63"-.74" (1.60-1.88)	790 (3,514)	2,066 (9,190)	4" (10.16)	10" (25.40)	<b>02202002</b>	<b>02402002</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	2,060 (9,163)	4" (10.16)	13" (33.02)	<b>02202003</b>	<b>02402003</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,678 (11,912)	5" (12.70)	14" (35.56)	<b>02202005</b>	<b>02402005</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,490 (19,972)	5" (12.70)	15" (38.10)	<b>02202006</b>	<b>02402006</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	3,750 (16,681)	5" (12.70)	17" (43.18)	<b>02202007</b>	<b>02402007</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	5,000 (22,241)	6" (15.24)	19" (48.26)	<b>02202008</b>	<b>02402008</b>
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	8,940 (39,767)	6" (15.24)	21" (53.34)	<b>02202009</b>	<b>02402009</b>
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	—	6" (15.24)	23" (58.42)	<b>02202010</b>	—
3.00"-3.49" (7.62-8.86)	4,900 (21,795)	—	8" (20.32)	25" (63.50)	<b>02202011</b>	—
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	—	8" (20.32)	27" (68.58)	<b>02202012</b>	—

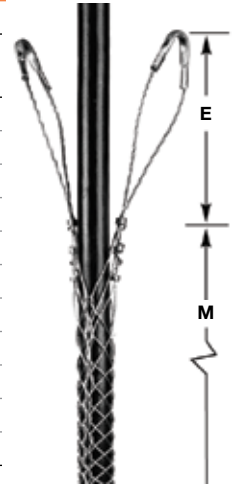

### Double Eye, Split Mesh, Rod Closing

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"-.62" (1.27-1.57)	790 (3,514)	—	4" (10.16)	6.5"	<b>02203001</b>	—
.63"-.74" (1.60-1.88)	790 (3,514)	2,050 (9,119)	4" (10.16)	8.5" (21.59)	<b>02203002</b>	<b>02403002</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	2,050 (9,119)	4" (10.16)	10.5" (26.67)	<b>02203003</b>	<b>02403003</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,650 (11,788)	5" (12.70)	12.5" (31.75)	<b>02203005</b>	<b>02403005</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	3,750 (16,681)	5" (12.70)	14.5" (36.83)	<b>02203006</b>	<b>02403006</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	3,750 (16,681)	5" (12.70)	15.5" (39.37)	<b>02203007</b>	<b>02403007</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	5,000 (22,241)	6" (15.24)	16.5" (41.91)	<b>02203008</b>	<b>02403008</b>
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	8,950 (39,812)	6" (15.24)	19.5" (49.53)	<b>02203009</b>	<b>02403009</b>
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	8,950 (39,812)	6" (15.24)	21.5" (54.61)	<b>02203010</b>	<b>02403010</b>
3.00"-3.49" (7.62-8.86)	5,750 (25,576)	11,150 (49,598)	8" (20.32)	23.5" (59.69)	<b>02203011</b>	<b>02403011</b>
3.50"-3.99" (8.89-10.13)	5,750 (25,576)	—	8" (20.32)	25.5" (64.77)	<b>02203012</b>	—

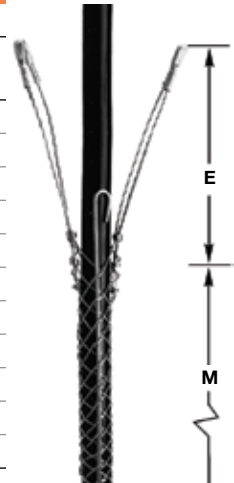

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Standard Duty Support Grips


Offset Eye, Single Weave, Tin-Coated Bronze and Stainless Steel

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Offset Eye, Closed Mesh


For permanent support when cable end is available to be installed through grip.

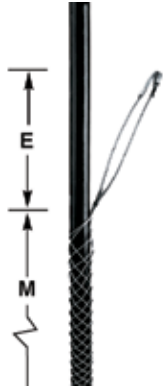

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	530 (2,357)	1,370 (6,094)	4" (10.16)	10" (25.40)	<b>02201037</b>	<b>02401037</b>
.63"- .74" (1.60-1.88)	750 (3,336)	1,950 (8,674)	4" (10.16)	10" (25.40)	<b>02201038</b>	<b>02401038</b>
.75"- .99" (1.90-2.51)	950 (4,226)	2,060 (9,163)	4" (10.16)	13" (33.02)	<b>02201039</b>	<b>02401039</b>
1.00"-1.24" (2.54-3.15)	1,500 (6,672)	2,678 (11,912)	5" (12.70)	14" (35.56)	<b>02201041</b>	<b>02401041</b>
1.25"-1.49" (3.17-3.78)	1,500 (6,672)	4,490 (19,972)	5" (12.70)	15" (38.10)	<b>02201042</b>	<b>02401042</b>
1.50"-1.74" (3.81-4.42)	1,500 (6,672)	3,700 (16,458)	5" (12.70)	17" (43.18)	<b>02201043</b>	<b>02401043</b>
1.75"-1.99" (4.44-5.05)	2,000 (8,896)	4,375 (19,461)	6" (15.24)	19" (48.26)	<b>02201044</b>	<b>02401044</b>
2.00"-2.49" (5.08-6.32)	3,100 (13,789)	5,500 (24,465)	9" (22.86)	21" (53.34)	<b>02201045</b>	<b>02401045</b>
2.50"-2.99" (6.35-7.59)	3,100 (13,789)	—	9" (22.86)	23" (58.42)	<b>02201046</b>	—
3.00"-3.49" (7.62-8.86)	3,800 (16,902)	—	11" (27.94)	25" (63.50)	<b>02201047</b>	—
3.50"-3.99" (8.89-10.13)	3,250 (14,480)	—	11" (27.94)	27" (68.58)	<b>02201048</b>	—

### Offset Eye, Split Mesh, Lace Closing


For permanent support when cable end is not available.

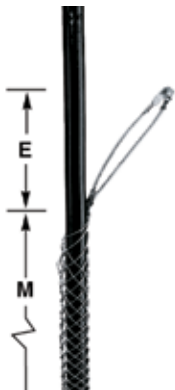

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	500 (2,224)	1,370 (6,094)	4" (10.16)	10" (25.40)	<b>02202037</b>	—
.63"- .74" (1.60-1.88)	750 (3,336)	1,952 (8,683)	4" (10.16)	10" (25.40)	<b>02202038</b>	<b>02402038</b>
.75"- .99" (1.90-2.51)	950 (4,226)	2,060 (9,163)	4" (10.16)	13" (33.02)	<b>02202039</b>	—
1.00"-1.24" (2.54-3.15)	1,500 (6,672)	2,670 (11,877)	5" (12.70)	14" (35.56)	<b>02202041</b>	—
1.25"-1.49" (3.17-3.78)	1,500 (6,672)	4,490 (19,972)	5" (12.70)	15" (38.10)	<b>02202042</b>	<b>02402042</b>
1.50"-1.74" (3.81-4.42)	1,500 (6,672)	4,490 (19,972)	5" (12.70)	17" (43.18)	<b>02202043</b>	—
1.75"-1.99" (4.44-5.05)	1,800 (8,006)	4,375 (19,461)	6" (15.24)	19" (48.26)	<b>02202044</b>	<b>02402044</b>
2.00"-2.49" (5.08-6.32)	2,150 (9,563)	5,500 (24,465)	9" (22.86)	21" (53.34)	<b>02202045</b>	<b>02402045</b>
2.50"-2.99" (6.35-7.59)	2,150 (9,563)	5,500 (24,465)	9" (22.86)	23" (58.42)	<b>02202046</b>	<b>02402046</b>
3.00"-3.49" (7.62-8.86)	3,250 (14,480)	10,190 (45,327)	11" (27.94)	25" (63.50)	<b>02202047</b>	<b>02402047</b>
3.50"-3.99" (8.89-10.13)	3,250 (14,480)	—	11" (27.94)	27" (68.58)	<b>02202048</b>	—

### Offset Eye, Split Mesh, Rod Closing

For support when cable end is not available.

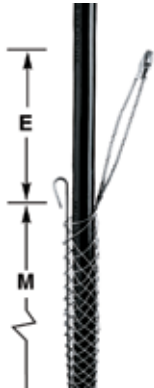

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"- .62" (1.27-1.57)	500 (2,224)	1,000 (4,448)	4" (10.16)	7" (17.78)	<b>02203037</b>	<b>02403037</b>
.63"- .74" (1.60-1.88)	750 (3,336)	1,950 (8,674)	4" (10.16)	9" (22.86)	<b>02203038</b>	<b>02403038</b>
.75"- .99" (1.90-2.51)	950 (4,226)	1,950 (8,674)	4" (10.16)	10" (25.40)	<b>02203039</b>	<b>02403039</b>
1.00"-1.24" (2.54-3.15)	1,500 (6,672)	2,500 (11,121)	5" (12.70)	12" (30.48)	<b>02203041</b>	<b>02403041</b>
1.25"-1.49" (3.17-3.78)	1,500 (6,672)	4,200 (18,683)	5" (12.70)	14" (35.56)	<b>02203042</b>	<b>02403042</b>
1.50"-1.74" (3.81-4.42)	1,500 (6,672)	4,500 (20,017)	5" (12.70)	15" (38.10)	<b>02203043</b>	<b>02403043</b>
1.75"-1.99" (4.44-5.05)	2,000 (8,896)	4,375 (19,461)	6" (15.24)	16" (40.64)	<b>02203044</b>	<b>02403044</b>
2.00"-2.49" (5.08-6.32)	3,100 (13,789)	8,350 (37,143)	9" (22.86)	19" (48.26)	<b>02203045</b>	<b>02403045</b>
2.50"-2.99" (6.35-7.59)	3,100 (13,789)	—	9" (22.86)	20" (50.80)	<b>02203046</b>	—
3.00"-3.49" (7.62-8.86)	4,300 (19,126)	8,400 (37,365)	11" (27.94)	21" (53.34)	<b>02203047</b>	<b>02403047</b>
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	—	11" (27.94)	21" (53.34)	<b>02203048</b>	—

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Standard Duty Support Grips

Universal Eye, Single Weave, Tin-Coated Bronze and Stainless Steel

**IMPORTANT**  
Read all breaking strength, safety and technical data relating to this product.

### Universal Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"-.62" (1.27-1.57)	530 (2,357)	1,370 (6,094)	18" (45.72)	10" (25.40)	<b>02201051</b>	<b>02401051</b>
.63"-.74" (1.60-1.88)	790 (3,514)	2,060 (9,163)	18" (45.72)	10" (25.40)	<b>02201052</b>	<b>02401052</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	2,066 (9,190)	18" (45.72)	13" (33.02)	<b>02201053</b>	<b>02401053</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	—	18" (45.72)	14" (35.56)	<b>02201050</b>	—
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,490 (19,972)	18" (45.72)	15" (38.10)	<b>02201054</b>	<b>02401054</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	4,490 (19,972)	18" (45.72)	17" (43.18)	<b>02201055</b>	<b>02401055</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	—	18" (45.72)	19" (48.26)	<b>02201056</b>	—
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	—	18" (45.72)	21" (53.34)	<b>02201057</b>	—
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	—	18" (45.72)	23" (58.42)	<b>02201058</b>	—



### Universal Eye, Split Mesh, Lace Closing

For permanent support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"-.62" (1.27-1.57)	530 (2,357)	—	18" (45.72)	10" (25.40)	<b>02202050</b>	—
.63"-.74" (1.60-1.88)	790 (3,514)	2,060 (9,163)	18" (45.72)	10" (25.40)	<b>02202051</b>	<b>02402051</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	—	18" (45.72)	13" (33.02)	<b>02202052</b>	—
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	—	18" (45.72)	14" (35.56)	<b>02202054</b>	—
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	—	18" (45.72)	15" (38.10)	<b>02202055</b>	—
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	—	18" (45.72)	17" (43.18)	<b>02202056</b>	—
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	—	18" (45.72)	19" (48.26)	<b>02202057</b>	—
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	—	18" (45.72)	21" (53.34)	<b>02202058</b>	—
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	—	18" (45.72)	23" (58.42)	<b>02202059</b>	—
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	—	18" (45.72)	27" (68.58)	<b>02202061</b>	—



### Universal Eye, Split Mesh, Rod Closing

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.50"-.62" (1.27-1.57)	790 (3,514)	—	18" (45.72)	8.5" (21.59)	<b>02203064</b>	—
.63"-.74" (1.60-1.88)	790 (3,514)	2,050 (9,119)	18" (45.72)	8.5" (21.59)	<b>02203065</b>	<b>02403065</b>
.75"-.99" (1.90-2.51)	1,020 (4,537)	2,050 (9,119)	18" (45.72)	10.5" (26.67)	<b>02203066</b>	<b>02403066</b>
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	2,650 (11,788)	18" (45.72)	12.5" (31.75)	<b>02203068</b>	<b>02403068</b>
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	4,500 (20,017)	18" (45.72)	14.5" (36.83)	<b>02203069</b>	<b>02403069</b>
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	4,500 (20,017)	18" (45.72)	15.5" (39.37)	<b>02203070</b>	<b>02403070</b>
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	—	18" (45.72)	16.5" (41.91)	<b>02203071</b>	—
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	—	18" (45.72)	19.5" (49.53)	<b>02203072</b>	—
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	—	18" (45.72)	21.5" (54.61)	<b>02203073</b>	—
3.00"-3.49" (7.62-8.86)	5,750 (25,576)	—	18" (45.72)	23.5" (59.69)	<b>02203074</b>	—



Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Non-Metallic Support Grips

Single Eye, Double Weave, Non-Metallic Aramid Fiber

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Kellems® Non-Metallic Support Grips

Kellems® Non-Metallic Support Grips, made of a high strength double weave aramid fiber, are available for supporting cable in corrosive environments.

#### Non-Metallic Support Grips, Single Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Color Code	Catalog Number
.50"-.62" (1.27-1.57)	1,000 (4,448)		6.0" (15.24)	22" (55.88)	Green	<b>02601001</b>
.63"-.74" (1.60-1.88)	2,000 (8,896)		6.0" (15.24)	24" (60.96)	Yellow	<b>02601002</b>
.75"-.99" (1.90-2.51)	2,000 (8,896)		6.0" (15.24)	28.5" (72.39)	Red	<b>02601003</b>
1.00"-1.24" (2.54-3.15)	3,000 (13,345)		6.0" (15.24)	31" (78.74)	Blue	<b>02601004</b>
1.25"-1.49" (3.17-3.78)	3,000 (13,345)		6.0" (15.24)	36.5" (92.71)	White	<b>02601005</b>
1.50"-1.99" (3.81-5.05)	3,000 (13,345)		6.0" (15.24)	40" (101.60)	Pink	<b>02601006</b>

Note: Specified for corrosive applications.

## Heavy Duty Support Grips

Single Eye, Double Weave, Tin-Coated Bronze and Stainless Steel



### Heavy Duty, Single Eye, Closed Mesh

For heavy duty permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.75"-.99" (1.90-2.51)	2,820 (12,543)	4,200 (18,683)	10" (25.40)	25" (63.50)	<b>02206010</b>	<b>02406010</b>
1.00"-1.24" (2.54-3.15)	4,280 (19,037)	7,300 (32,472)	12" (30.48)	28" (71.12)	<b>02206011</b>	<b>02406011</b>
1.25"-1.49" (3.17-3.78)	4,280 (19,037)	7,300 (32,472)	12" (30.48)	30" (76.20)	<b>02206012</b>	<b>02406012</b>
1.50"-1.99" (3.81-5.05)	4,280 (19,037)	11,150 (49,598)	12" (30.48)	34" (86.36)	<b>02206013</b>	<b>02406013</b>



### Single Eye, Split Mesh, Lace Closing

For permanent support when cable end is not available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.75"-.99" (1.90-2.51)	2,820 (12,543)	4,200 (18,683)	10" (25.40)	25" (63.50)	<b>02207010</b>	<b>02407010</b>
1.00"-1.24" (2.54-3.15)	4,280 (19,037)	7,300 (32,472)	12" (30.48)	28" (71.12)	<b>02207011</b>	<b>02407011</b>
1.25"-1.49" (3.17-3.78)	4,280 (19,037)	7,300 (32,472)	12" (30.48)	30" (76.20)	<b>02207012</b>	<b>02407012</b>
1.50"-1.99" (3.81-5.05)	4,280 (19,037)	11,150 (49,598)	12" (30.48)	34" (86.36)	<b>02207013</b>	<b>02407013</b>

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)





## Heavy Duty Support Grips


Double Eye, Double Weave, Tin-Coated Bronze and Stainless Steel

**IMPORTANT**  
Read all breaking strength, safety and technical data relating to this product.

### Double Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.75"-1.24" (1.90-3.15)	2,820 (12,543)	4,250 (18,905)	10" (25.40)	25" (63.50)	<b>02206001</b>	<b>02406001</b>
1.00"-1.24" (2.54-3.15)	4,280 (19,037)	7,300 (32,472)	10" (25.40)	28" (71.12)	<b>02206002</b>	<b>02406002</b>
1.25"-1.49" (3.17-3.78)	4,280 (19,037)	7,300 (32,472)	10" (25.40)	30" (76.20)	<b>02206003</b>	<b>02406003</b>
1.50"-1.99" (3.81-5.05)	4,280 (19,037)	11,100 (49,375)	10" (25.40)	34" (86.36)	<b>02206004</b>	<b>02406004</b>
2.00"-2.49" (5.08-6.32)	8,050 (35,806)	20,100 (89,409)	12" (30.48)	36" (91.44)	<b>02206005</b>	<b>02406005</b>
2.50"-2.99" (6.35-7.59)	8,050 (35,806)	20,100 (89,409)	12" (30.48)	38" (96.52)	<b>02206006</b>	<b>02406006</b>
3.00"-3.49" (7.62-8.86)	10,060 (44,747)	25,200 (112,095)	12" (30.48)	40" (101.60)	<b>02206007</b>	<b>02406007</b>
3.50"-3.99" (8.89-10.13)	12,070 (53,687)	—	12" (30.48)	44" (111.76)	<b>02206008</b>	—
4.00"-4.49" (10.16-11.40)	12,070 (53,687)	—	12" (30.48)	46" (116.84)	<b>02206009</b>	—
4.50"-4.99" (11.43-12.67)	12,070 (53,687)	—	12" (30.48)	68" (172.72)	<b>02208009</b>	—

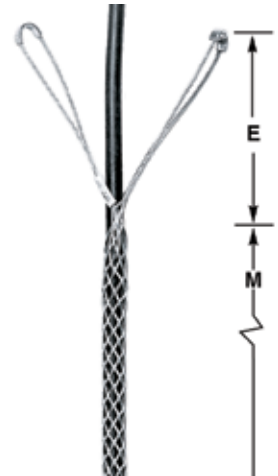

### Double Eye, Split Mesh, Lace Closing

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.75"-1.24" (1.90-3.15)	2,820 (12,543)	4,250 (18,905)	10" (25.40)	25" (63.50)	<b>02207001</b>	<b>02407001</b>
1.00"-1.24" (2.54-3.15)	4,280 (19,037)	7,300 (32,472)	10" (25.40)	28" (71.12)	<b>02207002</b>	<b>02407002</b>
1.25"-1.49" (3.17-3.78)	4,280 (19,037)	7,300 (32,472)	10" (25.40)	30" (76.20)	<b>02207003</b>	<b>02407003</b>
1.50"-1.99" (3.81-5.05)	4,280 (19,037)	11,150 (49,598)	10" (25.40)	34" (86.36)	<b>02207004</b>	<b>02407004</b>
2.00"-2.49" (5.08-6.32)	8,050 (35,806)	20,150 (89,632)	12" (30.48)	36" (91.44)	<b>02207005</b>	<b>02407005</b>
2.50"-2.99" (6.35-7.59)	8,050 (35,806)	20,150 (89,632)	12" (30.48)	38" (96.52)	<b>02207006</b>	<b>02407006</b>
3.00"-3.49" (7.62-8.86)	10,060 (44,747)	25,200 (112,095)	12" (30.48)	40" (101.60)	<b>02207007</b>	<b>02407007</b>
3.50"-3.99" (8.89-10.13)	12,070 (53,687)	30,200 (134,336)	12" (30.48)	44" (111.76)	<b>02207008</b>	<b>02407008</b>
4.00"-4.49" (10.16-11.40)	12,070 (53,687)	30,200 (134,336)	12" (30.48)	46" (116.84)	<b>02207009</b>	<b>02407009</b>
4.50"-4.99" (11.43-12.67)	12,070 (53,687)	—	12" (30.48)	68" (172.72)	<b>02209009</b>	—

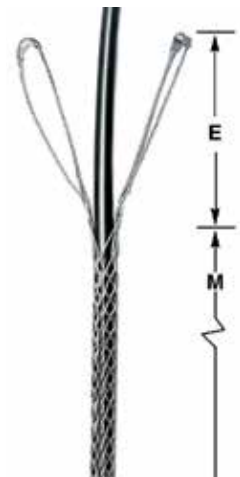

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Service Drop Grips


Single Eye, Tin-Coated Bronze and Stainless Steel

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Light Duty, Single Eye, Closed Mesh, Single Weave


For permanent support when cable end is available to be installed.

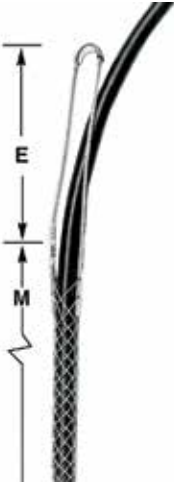

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.23"-.31" (.58-.79)	290 (1,290)	700 (3,114)	3" (7.62)	3.75" (9.52)	<b>02216001</b>	<b>02416001</b>
.29"-.37" (.74-.94)	290 (1,290)	700 (3,114)	5" (12.70)	4.25" (10.79)	<b>02216002</b>	<b>02416002</b>
.35"-.44" (.89-1.12)	500 (2,224)	850 (3,781)	5.5" (13.97)	4.75" (12.06)	<b>02216003</b>	<b>02416003</b>
.41"-.50" (1.04-1.27)	500 (2,224)	850 (3,781)	5.5" (13.97)	5" (12.70)	<b>02216004</b>	<b>02416004</b>
.46"-.56" (1.17-1.42)	660 (2,936)	850 (3,781)	6" (15.24)	5.25" (13.33)	<b>02216005</b>	<b>02416005</b>
.52"-.62" (1.32-1.57)	790 (3,514)	1,050 (4,670)	7" (17.78)	6.25" (15.87)	<b>02216006</b>	<b>02416006</b>
.58"-.68" (1.47-1.73)	790 (3,514)	1,050 (4,670)	7" (17.78)	6" (15.24)	<b>02216007</b>	<b>02416007</b>
.64"-.75" (1.63-1.90)	790 (3,514)	1,050 (4,670)	7" (17.78)	6.75" (17.14)	<b>02216008</b>	<b>02416008</b>
.70"-.81" (1.78-2.06)	790 (3,514)	2,050 (9,119)	7" (17.78)	7.25" (18.41)	<b>02216009</b>	<b>02416009</b>
.75"-.87" (1.90-2.21)	1,020 (4,537)	2,050 (9,119)	8" (20.32)	8" (20.32)	<b>02216010</b>	<b>02416010</b>
.81"-.94" (2.06-2.39)	1,020 (4,537)	2,050 (9,119)	8" (20.32)	8.25" (20.95)	<b>02216011</b>	<b>02416011</b>
.87"-1.00" (2.21-2.54)	1,020 (4,537)	—	8" (20.32)	8.75" (22.22)	<b>02216012</b>	—
.94"-1.06" (2.39-2.69)	1,020 (4,537)	2,050 (9,119)	9" (22.86)	9" (22.86)	<b>02216013</b>	<b>02416013</b>
1.00"-1.18" (2.54-3.00)	1,020 (4,537)	2,050 (9,119)	9" (22.86)	9.5" (24.13)	<b>02216014</b>	<b>02416014</b>
1.06"-1.25" (2.69-3.17)	1,020 (4,537)	2,050 (9,119)	9" (22.86)	9.5" (24.13)	<b>02216015</b>	<b>02416015</b>

### Heavy Duty, Single Eye, Closed Mesh, Multi-Weave


For permanent support when cable end is available to be installed.

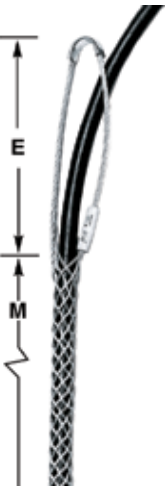

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)		E Inches (cm)	M Inches (cm)	Tin-Coated Bronze	Stainless Steel
	Tin-Coated Bronze	Stainless Steel				
.23"-.31" (.58-.79)	500 (2,224)	1,400 (6,228)	5" (12.70)	4.5" (11.43)	<b>02217001</b>	<b>02417001</b>
.29"-.37" (.74-.94)	500 (2,224)	1,150 (5,115)	5" (12.70)	5.5" (13.97)	<b>02217002</b>	<b>02417002</b>
.35"-.44" (.89-1.12)	870 (3,870)	1,700 (7,562)	6" (15.24)	6.5" (16.51)	<b>02217003</b>	<b>02417003</b>
.41"-.50" (1.04-1.27)	870 (3,870)	1,700 (7,562)	6" (15.24)	7.5" (19.05)	<b>02217004</b>	<b>02417004</b>
.46"-.56" (1.17-1.42)	1,050 (4,670)	2,100 (9,341)	6" (15.24)	8" (20.32)	<b>02217005</b>	<b>02417005</b>
.52"-.62" (1.32-1.57)	1,050 (4,670)	2,100 (9,341)	7" (17.78)	8.5" (21.59)	<b>02217006</b>	<b>02417006</b>
.58"-.68" (1.47-1.73)	1,050 (4,670)	2,100 (9,341)	7" (17.78)	9.5" (24.13)	<b>02217007</b>	<b>02417007</b>
.64"-.75" (1.63-1.90)	1,390 (6,183)	4,161 (18,509)	7" (17.78)	9.5" (24.13)	<b>02217008</b>	<b>02417008</b>
.70"-.81" (1.78-2.06)	1,390 (6,183)	4,100 (18,238)	8" (20.32)	10.5" (26.67)	<b>02217009</b>	<b>02417009</b>
.75"-.87" (1.90-2.21)	1,390 (6,183)	—	8" (20.32)	10.5" (26.67)	<b>02217010</b>	—
.81"-.94" (2.06-2.39)	1,390 (6,183)	—	8" (20.32)	10.5" (26.67)	<b>02217011</b>	—
.87"-1.00" (2.21-2.54)	1,790 (7,962)	5,350 (23,798)	8" (20.32)	11.5" (29.21)	<b>02217012</b>	<b>02417012</b>
.94"-1.06" (2.39-2.69)	1,790 (7,962)	5,300 (23,576)	9" (22.86)	12.5" (31.75)	<b>02217013</b>	<b>02417013</b>
1.00"-1.18" (2.54-3.00)	1,790 (7,962)	5,300 (23,576)	9" (22.86)	13.5" (34.29)	<b>02217014</b>	<b>02417014</b>
1.06"-1.25" (2.69-3.17)	1,790 (7,962)	5,350 (23,798)	9" (22.86)	14.5" (36.83)	<b>02217015</b>	<b>02417015</b>

Note: E-Eye length. M-Mesh length at nominal diameter.

Screw Hook  
Catalog Number **20303001**  
Yield Strength 900 lbs (4003 N)

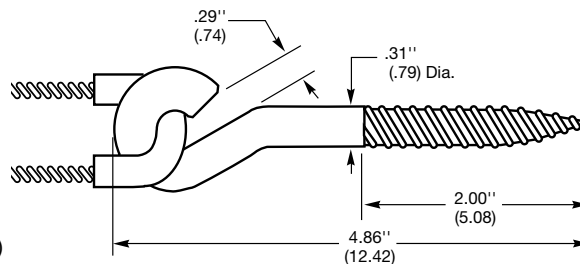

Dimensions in Inches (mm)



## Service Drop Grips

Universal Eye, Tin-Coated Bronze

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Light Duty, Universal Eye, Closed Mesh, Single Weave

For permanent support when cable end is available to be installed.


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	290 (1,290)	9" (22.86)	3.75" (9.52)	<b>02216016</b>
.29"-.37" (.74-.94)	290 (1,290)	10" (25.40)	4.25" (10.79)	<b>02216017</b>
.35"-.44" (.89-1.12)	500 (2,224)	10" (25.40)	4.75" (12.06)	<b>02216018</b>
.41"-.50" (1.04-1.27)	500 (2,224)	11" (27.94)	5" (12.70)	<b>02216019</b>
.46"-.56" (1.17-1.42)	660 (2,936)	12" (30.48)	5.25" (13.33)	<b>02216020</b>
.52"-.62" (1.32-1.57)	790 (3,514)	13" (33.02)	6.25" (15.87)	<b>02216021</b>
.58"-.68" (1.47-1.73)	790 (3,514)	13" (33.02)	6.5" (16.51)	<b>02216022</b>
.64"-.75" (1.63-1.90)	790 (3,514)	13" (33.02)	6.75" (17.14)	<b>02216023</b>
.70"-.81" (1.78-2.06)	790 (3,514)	13" (33.02)	7.25" (18.41)	<b>02216024</b>
.75"-.87" (1.90-2.21)	1,020 (4,537)	14" (35.56)	8" (20.32)	<b>02216025</b>
.81"-.94" (2.06-2.39)	1,020 (4,537)	14" (35.56)	8.25" (20.95)	<b>02216026</b>
.87"-1.00" (2.21-2.54)	1,020 (4,537)	14" (35.56)	8.75" (22.22)	<b>02216027</b>
.94"-1.06" (2.39-2.69)	1,020 (4,537)	15" (38.10)	9" (22.86)	<b>02216028</b>
1.00"-1.18" (2.54-3.00)	1,020 (4,537)	15" (38.10)	9.5" (24.13)	<b>02216029</b>
1.06"-1.25" (2.69-3.17)	1,020 (4,537)	15" (38.10)	9.5" (24.13)	<b>02216030</b>



### Heavy Duty, Universal Eye, Closed Mesh, Multi-Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	500 (2,224)	11" (27.94)	4.5" (11.43)	<b>02217016</b>
.28"-.37" (.74-.94)	500 (2,224)	11" (27.94)	5.5" (13.97)	<b>02217017</b>
.35"-.44" (.89-1.12)	870 (3,870)	12" (30.48)	6.5" (16.51)	<b>02217018</b>
.41"-.50" (1.04-1.27)	870 (3,870)	12" (30.48)	7.5" (19.05)	<b>02217019</b>
.46"-.56" (1.17-1.42)	1,050 (4,670)	12" (30.48)	8" (20.32)	<b>02217020</b>
.52"-.62" (1.32-1.57)	1,050 (4,670)	13" (33.02)	8.5" (21.59)	<b>02217021</b>
.58"-.68" (1.47-1.73)	1,050 (4,670)	13" (33.02)	9.5" (24.13)	<b>02217022</b>
.64"-.75" (1.63-1.90)	1,390 (6,183)	13" (33.02)	9.5" (24.13)	<b>02217023</b>
.70"-.81" (1.78-2.06)	1,390 (6,183)	14" (35.56)	10.5" (26.67)	<b>02217024</b>
.75"-.87" (1.90-2.21)	1,390 (6,183)	14" (35.56)	10.5" (26.67)	<b>02217025</b>
.81"-.94" (2.06-2.39)	1,390 (6,183)	14" (35.56)	10.5" (26.67)	<b>02217026</b>
.87"-1.00" (2.21-2.54)	1,790 (7,962)	14" (35.56)	11.5" (29.21)	<b>02217027</b>
.94"-1.06" (2.39-2.69)	1,790 (7,962)	15" (38.10)	12.5" (31.75)	<b>02217028</b>
1.00"-1.18" (2.54-3.00)	1,790 (7,962)	15" (38.10)	13.5" (34.29)	<b>02217029</b>
1.06"-1.25" (2.69-3.17)	1,790 (7,962)	15" (38.10)	14.5" (36.83)	<b>02217030</b>

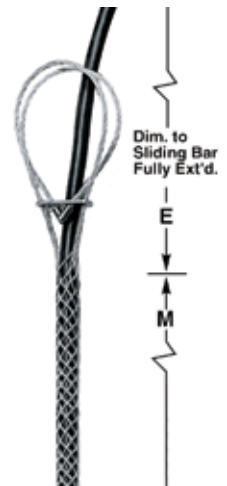

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Bus Drop Support Grips

Single Eye, Universal Eye, Galvanized Steel

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Safety Spring

Maximum Deflection Inches/Lbs (cm/N)	Approx. Breaking Strength Lbs. (N)	Length* Inches (cm)	Diameter Inches (cm)	Model Lbs. (N)	Catalog Number
2¾" at 40 lbs. (6.98 at 178)	500 (2,224)	8.25" (20.95)	.75" (1.90)	40 lb. spring (178)	<b>20302001</b>
3½" at 80 lbs. (7.94 at 356)	850 (3,781)	8.25" (20.95)	1" (2.54)	80 lb. spring (356)	<b>20302002</b>

Note: Springs can be used with single eye grips by disassembling drawbar from coil, placing through eye and replacing drawbar.  
\*No load.



### Single Eye, Wide Range


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.24"- .32" (.61-.81)	350 (1,557)	3" (7.62)	3.5" (8.89)	<b>073041276**</b>
.32"- .43" (.81-1.09)	450 (2,002)	4" (10.16)	4" (10.16)	<b>073041277</b>
.43"- .56" (1.09-1.42)	550 (2,446)	6" (15.24)	4.75" (12.06)	<b>073041278</b>
.56"- .73" (1.42-1.85)	1,000 (4,448)	7" (17.78)	6" (15.24)	<b>073041279</b>
.73"- .85" (1.85-2.16)	1,400 (6,227)	7" (17.78)	6.75" (17.14)	<b>073041280</b>
.85"-1.00" (2.16-2.54)	1,400 (6,227)	8" (20.32)	8" (20.32)	<b>073041281</b>
1.00"-1.25" (2.54-3.17)	1,500 (6,672)	9" (22.86)	9.5" (24.13)	<b>073041282</b>



### Universal Eye, Wide Range

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.32"- .43" (.81-1.09)	450 (2,002)	10" (25.40)	4" (10.16)	<b>073041284</b>
.43"- .56" (1.09-1.42)	550 (2,446)	12" (30.48)	4.75" (12.06)	<b>073041285</b>
.56"- .73" (1.42-1.85)	1,000 (4,448)	13" (33.02)	6" (15.24)	<b>073041286</b>
.73"- .85" (1.85-2.16)	1,400 (6,227)	13" (33.02)	6.75" (17.14)	<b>073041287</b>
.85"-1.00" (2.16-2.54)	1,400 (6,227)	14" (35.56)	8" (20.32)	<b>073041288</b>
1.00"-1.25" (2.54-3.17)	1,500 (6,672)	15" (38.10)	9.5" (24.13)	<b>073041289</b>

Note: E-Eye length. M-Mesh length at nominal diameter.  
\*\*Item indicated is not UL listed.

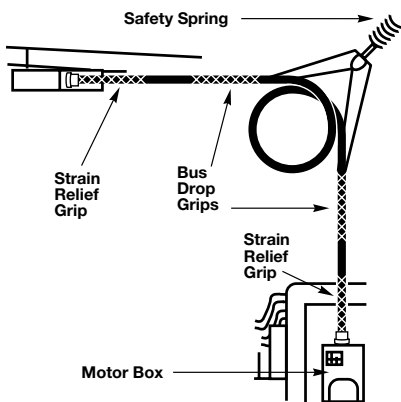

### Bus Drop Grips and Safety Springs

Kellems Bus Drop Grips are offered with either a single eye or universal bale attachment. The mesh is single weave galvanized steel with the patented wide range construction. They are suitable for indoor use only. Consult Technical Service for Stainless Steel Grips.

### Application

Bus Drop Grips provide a safe, easy and economical method to support flexible cord or bus drop cable at bus duct and other industrial areas.

### Benefits

- Easily installed
- Absorb tension, vibration and pull with no cable damage
- Patented mesh construction

### Safety Spring

Springs can be used with single eye grips by disassembling drawbar from coil, placing through eye and replacing drawbar.

Dimensions in Inches (mm)



## Conduit Riser Grips

### Single Weave, Closed Mesh

Kellems® Conduit Riser Support Grips are available in closed mesh and in split mesh with lace or rod closures, to cover all applications including single cable or multiple wire support. Refer to page V-37 for grip selection assistance for cable bundles. The standard material is tin-coated bronze strand. The grip is permanently fastened to a support ring, resulting in a one piece unit which will allow air ventilation within the conduit. The ring will fit standard electrical rigid metal conduit and schedule 40 rigid PVC conduit only. See page V-32 for ring dimensions. For permanent support when cable end is available to be installed through the grip.

**IMPORTANT**  
Read all breaking strength, safety and technical data relating to this product.



### Suitable For Standard Electrical Rigid Metal Conduit and Schedule 40 Rigid PVC Conduit Only

Cable Sizes In. (cm)	.50"-.62" (1.27-1.57)	.63"-.74" (1.60-1.88)	.75"-.99" (1.90-2.51)	1.00"-1.24" (2.54-3.15)	1.25"-1.49" (3.17-3.78)	1.50"-1.74" (3.81-4.42)	1.75"-1.99" (4.44-5.05)	2.00"-2.49" (5.08-6.32)	2.50"-2.99" (6.35-7.59)	3.00"-3.49" (7.62-8.86)	3.50"-3.99" (8.89-10.13)
Model	<b>R050</b>	<b>R062</b>	<b>R075</b>	<b>R100</b>	<b>R125</b>	<b>R150</b>	<b>R175</b>	<b>R200</b>	<b>R250</b>	<b>R300</b>	<b>R350</b>
Length In. (cm)	8" (20.32)	9" (22.86)	11" (27.94)	12" (30.48)	12" (30.48)	14" (35.56)	15" (38.10)	17" (43.18)	18" (45.72)	20" (50.80)	21" (53.34)
Conduit Sizes Inches	Catalog Number Approx. Breaking Strength Lbs. (N)										
¾	<b>02211106</b> 530 (2,357)	-	-	-	-	-	-	-	-	-	-
1	<b>02211100</b> 490 (2,179)	<b>02211101</b> 790 (3,514)	-	-	-	-	-	-	-	-	-
1¼	<b>02211001</b> 450 (2,002)	<b>02211002</b> 740 (3,292)	<b>02211003</b> 1,030 (4,581)	-	-	-	-	-	-	-	-
1½	-	<b>02211006</b> 690 (3,069)	<b>02211007</b> 970 (4,315)	<b>02211009</b> 1,610 (7,161)	-	-	-	-	-	-	-
2	-	<b>02211107</b> 640 (2,847)	<b>02211010</b> 920 (4,092)	<b>02211012</b> 1,520 (6,761)	<b>02211013</b> 1,610 (7,161)	-	-	-	-	-	-
2½	-	-	-	-	<b>02211017</b> 1,510 (6,716)	<b>02211018</b> 1,610 (7,161)	<b>02211019</b> 2,150 (9,563)	-	-	-	-
3	-	-	-	<b>02211022</b> 1,340 (5,960)	<b>02211023</b> 1,400 (6,227)	<b>02211024</b> 1,490 (6,627)	<b>02211025</b> 1,990 (8,851)	<b>02211026</b> 3,260 (14,500)	-	-	-
3½	-	-	-	-	-	-	-	<b>02211033</b> 2,970 (13,211)	<b>02211034</b> 3,260 (14,500)	-	-
4	-	-	-	-	-	-	<b>02211040</b> 1,670 (7,248)	<b>02211041</b> 2,680 (11,921)	<b>02211042</b> 2,890 (12,855)	<b>02211043</b> 4,080 (18,148)	-
5	-	-	-	-	-	-	-	-	<b>02211061</b> 2,150 (9,563)	<b>02211062</b> 2,860 (12,721)	<b>02211063</b> 3,130 (13,922)
6	-	-	-	-	-	-	-	-	-	<b>02211072</b> 2,245 (9,986)	<b>02211073</b> 2,245 (9,986)

Note: See page V-37 for multiple cables in a single conduit riser grip.



## Conduit Riser Grips

### Double Weave, Split Mesh, Lace Closing

Kellems® Conduit Riser Support Grips will support cable runs in vertical or sloping standard rigid conduit. The grip is fastened to a support ring which seats on the rim of the conduit. The entire grip is supported by the conduit itself and no other hardware is required. See page V-32 for ring dimensions. The rings will fit schedule 40 rigid PVC conduit and standard electrical rigid metal conduit only. For permanent support when cable end is not available.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Suitable For Standard Electrical Rigid Metal Conduit and Schedule 40 Rigid PVC Conduit Only

Cable Sizes In. (cm)	.75"-.99" (1.90-2.51)	1.00"-1.24" (2.54-3.15)	1.25"-1.49" (3.17-3.78)	1.50"-1.74" (3.81-4.42)	1.75"-1.99" (4.44-5.05)	2.00"-2.49" (5.08-6.32)	2.50"-2.99" (6.35-7.59)	3.00"-3.49" (7.62-8.86)	3.50"-3.99" (8.89-10.13)
----------------------	-----------------------	-------------------------	-------------------------	-------------------------	-------------------------	-------------------------	-------------------------	-------------------------	--------------------------

Model	RS075	RS100	RS125	RS150	RS175	RS200	RS250	RS300	RS350
Length In. (cm)	11" (27.94)	12" (30.48)	12" (30.48)	14" (35.56)	15" (38.10)	17" (43.18)	18" (45.72)	20" (50.80)	21" (53.34)

Conduit Sizes Inches	Catalog Number		Approx. Breaking Strength Lbs. (N)						
1¼	<b>02212003</b> 1,580 (7,028)	—	—	—	—	—	—	—	—
1½	<b>02212007</b> 1,500 (6,672)	—	—	—	—	—	—	—	—
2	<b>02212010</b> 1,430 (6,361)	<b>02212012</b> 1,930 (8,585)	<b>02212013</b> 2,040 (9,074)	—	—	—	—	—	—
2½	—	—	<b>02212017</b> 1,910 (8,496)	<b>02212018</b> 2,040 (9,074)	—	—	—	—	—
3	—	—	<b>02212023</b> 1,780 (7,917)	<b>02212024</b> 1,890 (8,407)	<b>02212025</b> 2,520 (11,209)	<b>02212026</b> 4,300 (19,126)	—	—	—
3½	—	—	—	—	—	<b>02212033</b> 3,910 (17,392)	<b>02212034</b> 4,300 (19,126)	—	—
4	—	—	—	—	<b>02212040</b> 2,110 (9,385)	<b>02212041</b> 3,530 (15,701)	<b>02212042</b> 3,820 (16,991)	<b>02212043</b> 5,380 (23,930)	—
5	—	—	—	—	—	—	<b>02212061</b> 2,860 (12,721)	—	—
6	—	—	—	—	—	—	—	—	<b>02212073</b> 2,955 (13,144)

Note: See page V-37 for multiple cables in a single conduit riser grip.

Dimensions in Inches (mm)

## Conduit Riser Grips

### Single Weave, Split Mesh, Rod Closing Benefits

- Easy and fast to install
- Will not damage electrical cable
- Allows cable to expand or contract
- Ideal way to hold cable in vertical conduit
- Prevents cable creep in conduit
- Helps prevent cable pullouts
- The rings will fit schedule 40 rigid PVC conduit and standard electrical rigid metal conduit only
- For support when cable end is not available

#### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Suitable For Standard Electrical Rigid Metal Conduit and Schedule 40 Rigid PVC Conduit Only

Cable Sizes In. (cm)	.75"-.99" (1.90-2.51)	1.00"-1.24" (2.54-3.15)	1.25"-1.49" (3.17-3.78)	1.50"-1.74" (3.81-4.42)	1.75"-1.99" (4.44-5.05)	2.00"-2.49" (5.08-6.32)	2.50"-2.99" (6.35-7.59)	3.00"-3.49" (7.62-8.86)	3.50"-3.99" (8.89-10.13)	
Model	RR075	RR100	RR125	RR150	RR175	RR200	RR250	RR300	RR350	
Length In. (cm)	11" (27.94)	12" (30.48)	12" (30.48)	14" (35.56)	15" (38.10)	17" (43.18)	18" (45.72)	20" (50.80)	21" (53.34)	
Conduit Sizes Inches	Catalog Number		Approx. Breaking Strength Lbs. (N)							
1¼	<b>02213003</b> 1,020 (4,537)	—	—	—	—	—	—	—	—	
1½	<b>02213007</b> 970 (4,315)	<b>02213009</b> 1,610 (7,161)	—	—	—	—	—	—	—	
2	—	<b>02213012</b> 1,520 (6,761)	<b>02213013</b> 1,610 (7,161)	—	—	—	—	—	—	
2½	—	—	<b>02213017</b> 1,510 (6,716)	<b>02213018</b> 1,610 (7,161)	—	—	—	—	—	
3	—	—	<b>02213023</b> 1,400 (6,227)	<b>02213024</b> 1,490 (6,627)	<b>02213025</b> 1,990 (8,851)	<b>02213026</b> 3,260 (14,500)	—	—	—	
3½	—	—	—	—	—	<b>02213033</b> 2,970 (13,211)	—	—	—	
4	—	—	—	—	—	<b>02213041</b> 2,670 (11,876)	<b>02213042</b> 2,890 (12,855)	—	—	

Note: See page V-37 for multiple cables in a single conduit riser grip.

Dimensions in Inches (mm)




## Conduit Ring Dimensions


Ring dimensions are found in the chart below. The ring material is corrosion resistant. These rings will fit schedule 40 rigid PVC conduit and standard electrical rigid metal conduit only.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

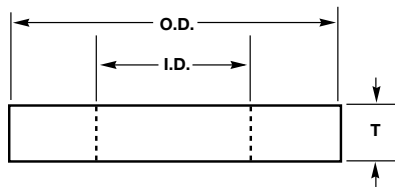

Conduit Size 3/4" and 1"

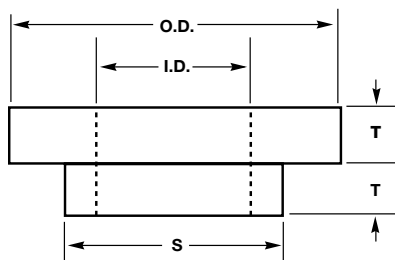

Conduit Size 1 1/4" to 6"

Conduit Size Inches	Ring Number	O.D. Inches (cm)	I.D. Inches (cm)	S Inches (cm)	T Inches (cm)
3/4	C-3/4	.94" (2.39)	.62" (1.57)	—	.19" (.48)
1	C-1	1.17" (2.97)	.80" (2.03)	—	.19" (.48)
1 1/4	C-1 1/4	1.50" (3.81)	1.03" (2.62)	1.31" (3.33)	.16" (.41)
1 1/2	C-1 1/2	1.76" (4.47)	1.23" (3.12)	1.52" (3.86)	.16" (.41)
2	C-2	2.23" (5.66)	1.55" (3.94)	1.97" (5.00)	.16" (.41)
2 1/2	C-2 1/2	2.67" (6.78)	2.05" (5.21)	2.40" (6.10)	.16" (.41)
3	C-3	3.20" (8.13)	2.55" (6.48)	2.97" (7.54)	.22" (.56)
3 1/2	C-3 1/2	3.80" (9.65)	3.05" (7.75)	3.47" (8.81)	.22" (.56)
4	C-4	4.30" (10.92)	3.55" (9.02)	3.94" (10.01)	.22" (.56)
4 1/2	C-4 1/2	4.80" (12.19)	4.03" (10.24)	4.45" (11.30)	.22" (.56)
5	C-5	5.30" (13.46)	4.46" (11.33)	4.96" (12.60)	.22" (.56)
6	C-6	6.30" (16.00)	5.36" (13.61)	5.96" (15.14)	.25" (.63)





## Kellems® Support Grips

Kellems Support Grips are used to hold the weight of electrical cable as it hangs in a vertical, sloping or horizontal position. Electrical cable must be supported, or its dead weight can cause excessive strain or pullout at the connections resulting in power failure. Support grips also absorb additional strain from flexure, vibration, expansion and contraction. Kellems Support Grips listed in this catalog are made of high grade, non-magnetic tin-coated bronze strand. Stainless steel grips, made of alloy 302–304 SST for severe service or unusual environmental conditions, are available on request.

### Select the Correct Support Grip

Each Kellems grip is designed to work on a specific range of cable diameters.

- Step 1** Refer to the Kellems chart below to determine the grip style best suited for your application.
- Step 2** Determine your cable outside diameter.
- Step 3** Find the grip size that encompasses your cable diameter.
- Step 4** Whenever possible, use a closed mesh that assembles over the cable end. If the cable end is not available, use a split mesh.
- Step 5** Where available, select an eye style that suits your needs.
- Step 6** Select the proper material—tinned bronze or stainless steel\*.
- Step 7** Estimate the tension to be put on the grip, establish the working load you require and compare this to the listed approximate breaking strength of the grip to insure that the grip will be strong enough. Refer to page V-34 for safety and working load considerations.

**WARNING:** It is very important to read and understand all safety information before proceeding. Failure to do so may result in property damage, personal injury or death.

Grips are to be installed and utilized by a qualified technician in accordance with all applicable national and local safety and electrical codes. Consult a licensed project safety professional, if necessary.

Ensure that the correct grip is selected for your specific needs. Grips should only be used for their intended purpose and not for other applications.

Banding the tail end of the grip is required to prevent unintended release of the grip's hold from the cable and to achieve maximum gripping strength. The strength of a Kellems grips is based on laboratory testing and does not evaluate variable conditions such as cable type, gripping surfaces, cable movement or impact loads. Suitability for the application must be determined by the user.

Thoroughly examine the condition of the grip prior to each use. Grips that are worn, bent, corroded, or show other signs of damage, such as frayed or broken wires, should never be used and must be replaced.

Do not modify the grip in any way.

Ensure that the recommended work load of the grip is suitable for the application. Never use a grip beyond its safe working load, which is the approximate breaking strength divided by the factor of safety. The recommended factor of safety is five (5) for pulling grips and ten (10) for support grips.

Pulling hardware should only be attached to the eye of the grip.

A swivel is recommended for attachment to the grip's eye in applications where torque release is necessary. Torque can build up in high tension pulling applications.

Do not run grips and swivels around sheaves or bull wheels while under tension. For synthetic rope, use Kellems Dua-Pull Grips only.

### Support Grip Selection Chart

Grip Styles	Application
Closed mesh	Standard, permanent support, cable end available.
Split lace closing	Standard, permanent support, cable end unavailable.
Split rod closing	Standard, temporary support, cable end unavailable. Tape or band tail end of wire mesh grip after positioning for permanent support.
Material*	Tin-coated bronze standard or stainless steel by special request.
Standard support grips	Support vertical runs to 99 ft. loads to 600 lbs.
Heavy duty grips	Support vertical runs over 100 ft. loads over 600 lbs.
Service drop	Light duty to support service entrance cable.
Bus drop	Light duty support, indoors only, on Bus drop cable.
Conduit riser	Support cable runs in rigid (Schedule 40) conduit.
Fiber optic cable support grips	Support fiber optic cable.

Note: \*Most catalog listed support grips are made of tin-coated bronze strand. To order stainless steel support grips, change the first three catalog number digits from 022-0x-xxx to 024-0x-xxx. Consult Technical Service for details.

### Eye Styles



Single



Double



Universal



Offset



## Safety And Working Load Factors For Wire Mesh Grips

The broad application of Kellems grips on a wide variety of objects requires that adequate safety factors be used to establish working loads. The approximate breaking strength of a Kellems grip represents an average calculation based on data established from actual direct tension testing done in our engineering laboratories.

It is impossible to catalog or guarantee a safety factor suitable for all applications as operating conditions are never the same. The tension, diameter, movement, number of objects gripped, gripping surface, and the attachments used are just some of the factors which vary with each application. These factors, together with the effects of abrasion, corrosion, prior use or abuse and any other variables of a specific application, must be considered by the user and the grip replaced as appropriate. Where the

conditions of the application are not well defined or known, or where risk of injury to persons or property is involved, a greater safety factor should be utilized.

### IMPORTANT

**Under normal conditions, Kellems' recommended factor of safety is five for catalog listed pulling grips, and ten for catalog listed support grips.**

Any warranty as to quality, performance or fitness for use of grips is always premised on the condition that the published breaking strengths apply only to new, unused grips, and that such products are properly stored, handled, used, maintained, and inspected by the user at a frequency appropriate for the use and condition of the grip.

## Examples

Grip Style	Approx. Breaking Strength Lbs. (N)	Safety Factor	Max. Recommended Load Lbs. (N)	Catalog Number
Pulling Grips	27,200 (120,986)	5	5,440 (24,197)	<b>03301027</b>
Support Grips	1,610 (7,161)	10	161 (716)	<b>02202019</b>

The maximum recommended working load is the tension to be exerted on the grip in application with a margin of safety to take care of unforeseen and unusual circumstances.

It is the end-user's decision to determine how much of a safety factor is acceptable for the application.

The metric unit of measure (force) for breaking strength and load is newtons (N). To convert from newtons to the metric unit of weight (kilograms) the conversion factor is 9.808 newtons/kilogram.

## Support Grip Materials

Material	Features	Grip Type
Tin-coated bronze wire	<ul style="list-style-type: none"> <li>• Corrosion resistant for normal outside areas</li> <li>• Non-magnetic</li> <li>• Moderate strength</li> </ul>	<ul style="list-style-type: none"> <li>• Support grips</li> <li>• Service drop grips</li> <li>• Conduit riser grips</li> </ul>
Stainless steel wire (302-304)	<ul style="list-style-type: none"> <li>• High strength</li> <li>• Corrosion resistant</li> </ul>	<ul style="list-style-type: none"> <li>• Support grips</li> <li>• Hose containment grips</li> </ul>
Galvanized steel wire	<ul style="list-style-type: none"> <li>• Slightly magnetic</li> <li>• Not subject to continuous outside environment</li> </ul>	<ul style="list-style-type: none"> <li>• Bus drop grips</li> </ul>
Non-metallic aramid fiber	<ul style="list-style-type: none"> <li>• Corrosion resistant for highly corrosive gases</li> </ul>	<ul style="list-style-type: none"> <li>• Support grips</li> </ul>

## Approvals

CSA Certifications are indicated on appropriate product catalog pages.

*Note: It is always recommended that the tail end of the grip be banded after the installation on the cable to prevent accidental release of the mesh. See page V-16 for end bands.*



## Split Support Grip Lace Closing Instructions

Single Weave Grips should be laced with single strand lacing; double weave with double strand. Lacing strands should be the same material as the grip. Kellems supplies the appropriate lacing with each grip.

1. Start the lacing at the lead or anchoring end of the grip. Thread the lacings through the first two loops of the split and pull through until the lacings are centered at this point. Lace as you would your shoe, crossing the lacings before lacing the next two loops.
2. Don't pull lacing too tight. Leave a space between adjoining loops approximately equal to the width of one diamond of the mesh.
3. Twist the lacing strands tightly together at the tail end of the grip.
4. Wrap the ends of the lacings once or twice tightly around the tail of the grip, twisting the ends together securely. Excess lace can be cut off.



## Split Support Grip Rod Closing Instructions

The stainless steel rod is a precise built-in feature which makes threading easy and fast. The strands of the mesh pass around the rod and match up with the strands from the opposite direction. The rod does not touch the cable at any point and therefore cannot cut the cable. Rod Closing Grips are reusable. They may be removed and reused as many times as desired.

### 1. Fast to install

Wrap the grip around the cable and thread the rod through the pre-formed loops with a corkscrew motion, using the curved end of the rod to engage the loops.

2. The action required is a steady push and twist simultaneously. The fingers of the left hand are used to bring the loops together just ahead of the hook on the end of the rod.
3. To remove, simply pull the rod out.






## For Support Grips Only\*

### Multiple Cable Selection Charts for Cables and Wires of Unequal Diameters

#### How to choose the correct grip size:

1. Find the Grip Circumference Range by measuring the circumference of the bundle of different diameter cables to be gripped (see illustration).
2. Divide the bundle circumference by 3.14 to determine the diameter.
3. Choose a grip offering a range of cable diameters the same as the cable diameter.

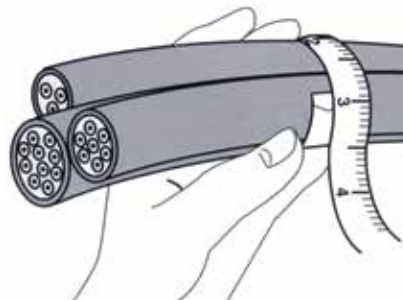

#### For Cables of Equal Diameters

Under "Number of Cables in One Grip", find the diameter of your single cable in vertical column. Read the grip diameter range to the right. If your diameter is the maximum of the range shown, go to the next larger size for Split Grips, stay with the same size for Closed Grips.

**Example:** 3 cables, each with .89" (2.26) diameter, for a Closed Grip select the 1.50"-1.74" (3.81-4.42) range, for a Split Grip select the 1.75"-1.99" (4.44-5.05) range.

#### Number of Cables in One Grip

2	3	4	5	6 and 7	8	9	Grip Dia. Range Inches (cm)
.30-.38 (.76-.97)	.25-.31 (.63-.79)	.22-.27 (.56-.69)	.19-.24 (.48-.61)	.17-.22 (.43-.56)	.15-.19 (.38-.48)	.14-.18 (.36-.46)	.50-.61 (1.27-1.55)
.38-.44 (.97-1.12)	.31-.36 (.79-.91)	.27-.31 (.69-.79)	.24-.29 (.61-.74)	.22-.26 (.56-.66)	.19-.23 (.48-.58)	.18-.21 (.46-.53)	.62-.74 (1.57-1.88)
.44-.59 (1.12-1.50)	.36-.49 (.91-1.24)	.31-.42 (.79-1.07)	.29-.38 (.74-.97)	.26-.34 (.66-.86)	.23-.31 (.58-.79)	.21-.28 (.53-.71)	.75-.99 (1.90-2.51)
.59-.75 (1.50-1.90)	.49-.63 (1.24-1.60)	.42-.54 (1.07-1.37)	.38-.48 (.97-1.22)	.34-.43 (.86-1.09)	.31-.39 (.79-.99)	.28-.35 (.71-.89)	1.00-1.24 (2.54-3.15)
.75-.90 (1.90-2.29)	.63-.76 (1.60-1.93)	.54-.65 (1.37-1.65)	.48-.58 (1.22-1.47)	.43-.52 (1.09-1.32)	.39-.46 (.99-1.17)	.35-.42 (.89-1.07)	1.25-1.49 (3.17-3.78)
.90-1.07 (2.29-2.72)	.76-.89 (1.93-2.26)	.65-.77 (1.65-1.96)	.58-.67 (1.47-1.70)	.52-.60 (1.32-1.52)	.46-.54 (1.17-1.37)	.42-.49 (1.07-1.24)	1.50-1.74 (3.81-4.42)
1.07-1.22 (2.72-3.10)	.89-1.02 (2.26-2.59)	.77-.88 (1.96-2.24)	.67-.77 (1.70-1.96)	.60-.69 (1.52-1.75)	.54-.62 (1.37-1.57)	.49-.56 (1.24-1.42)	1.75-1.99 (4.44-5.05)
1.22-1.53 (3.10-3.89)	1.02-1.28 (2.59-3.25)	.88-1.10 (2.24-2.79)	.77-.96 (1.96-2.44)	.69-.86 (1.75-2.18)	.62-.77 (1.57-1.96)	.56-.71 (1.42-1.80)	2.00-2.49 (5.08-6.32)
1.53-1.83 (3.89-4.65)	1.28-1.53 (3.25-3.89)	1.10-1.32 (2.79-3.35)	.96-1.16 (2.44-2.95)	.86-1.03 (2.18-2.62)	.77-.93 (1.96-2.36)	.71-.85 (1.80-2.16)	2.50-2.99 (6.35-7.59)
1.83-2.14 (4.65-5.44)	1.53-1.79 (3.89-4.55)	1.32-1.54 (3.35-3.91)	1.16-1.35 (2.95-3.43)	1.03-1.20 (2.62-3.05)	.93-1.08 (2.36-2.74)	.85-.99 (2.16-2.51)	3.00-3.49 (7.62-8.86)
2.14-2.44 (5.44-6.20)	1.79-2.05 (4.55-5.21)	1.54-1.76 (3.91-4.47)	1.35-1.54 (3.43-3.91)	1.20-1.37 (3.05-3.48)	1.08-1.24 (2.74-3.15)	.99-1.13 (2.51-2.87)	3.50-3.99 (8.89-10.13)
2.44-2.75 (6.20-6.98)	2.05-2.30 (5.21-5.84)	1.76-1.98 (4.47-5.03)	1.54-1.74 (3.91-4.42)	1.37-1.55 (3.48-3.94)	1.24-1.39 (3.15-3.53)	1.13-1.27 (2.87-3.23)	4.00-4.49 (10.16-11.40)
2.75-3.06 (6.98-7.77)	2.30-2.56 (5.84-6.50)	1.98-2.20 (5.03-5.59)	1.74-1.93 (4.42-4.90)	1.55-1.72 (3.94-4.37)	1.39-1.55 (3.53-3.94)	1.27-1.41 (3.23-3.58)	4.50-4.99 (11.43-12.67)

Note: \*This chart is to be used for determining grip size when multiple cables are held in a single Support Grip. For Conduit Riser multiple cable selection, see page V-37. It is always recommended that, when multiple cables are installed in a Support Grip, the tail end of the grip be banded after installation on the cable bundle. See page Tech-23 for cable and wire charts.




## For Conduit Riser Grips Only\*

### Multiple Cable Selection Charts for Cables and Wires of Unequal Diameters

#### How to choose the correct grip size:

1. Find the Grip Circumference Range by measuring the circumference of the bundle of different diameter cables to be gripped (see illustration).
2. Divide the bundle circumference by 3.14 to determine the diameter.
3. Choose a grip offering a range of cable diameters the same as the cable diameter.

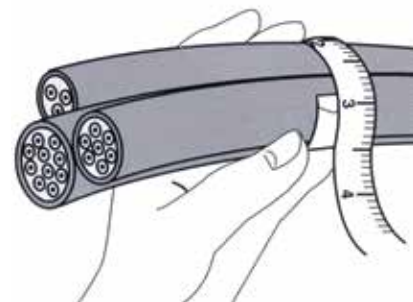

### For Cables of Equal Diameters

Under "Number of Cables in One Grip", find the diameter of your single cable in vertical column. Read the grip diameter range to the right. If your diameter is the maximum of the range shown, go to the next larger size for Split Grips, stay with the same size for Closed Grips.

**Example:** 3 cables, each with .85" (2.16) diameter, for a Closed Grip select the 1.50"-1.74" (3.81-4.42) range, for a Split Grip select the 1.75"-1.99" (4.44-5.05) range.

### Number of Equal Diameter Cables in One Grip

2	3	4	5	6 and 7	8	9	Grip Dia. Range Inches (cm)
.29-.36 (.74-.91)	.24-.30 (.61-.76)	.21-.25 (.53-.63)	.18-.22 (.46-.56)	.16-.20 (.41-.51)	.15-.18 (.38-.46)	.14-.17 (.36-.43)	.50-.62 (1.27-1.57)
.37-.43 (.94-1.09)	.31-.36 (.79-.91)	.26-.30 (.66-.76)	.23-.27 (.58-.69)	.21-.24 (.53-.61)	.19-.22 (.48-.56)	.18-.20 (.46-.51)	.63-.74 (1.60-1.88)
.44-.58 (1.12-1.47)	.37-.48 (.94-1.22)	.31-.41 (.79-1.04)	.28-.36 (.71-.91)	.25-.32 (.63-.81)	.23-.29 (.58-.74)	.21-.27 (.53-.69)	.75-.99 (1.90-2.51)
.59-.72 (1.50-1.83)	.49-.60 (1.24-1.52)	.42-.51 (1.07-1.30)	.37-.45 (.94-1.14)	.33-.40 (.84-1.02)	.30-.36 (.76-.91)	.28-.34 (.71-.86)	1.00-1.24 (2.54-3.15)
.73-.87 (1.85-2.21)	.61-.72 (1.55-1.83)	.52-.61 (1.32-1.55)	.46-.54 (1.17-1.37)	.41-.48 (1.04-1.22)	.37-.43 (.94-1.09)	.35-.40 (.89-1.02)	1.25-1.49 (3.17-3.78)
.88-1.01 (2.24-2.57)	.73-.85 (1.85-2.16)	.62-.71 (1.57-1.80)	.55-.63 (1.40-1.60)	.49-.56 (1.24-1.42)	.44-.51 (1.12-1.30)	.41-.47 (1.04-1.19)	1.50-1.74 (3.81-4.42)
1.02-1.16 (2.59-2.95)	.86-.96 (2.18-2.44)	.72-.81 (1.83-2.06)	.64-.72 (1.63-1.83)	.57-.64 (1.45-1.63)	.52-.58 (1.32-1.49)	.48-.54 (1.22-1.37)	1.75-1.99 (4.44-5.05)
1.17-1.44 (2.97-3.66)	.97-1.20 (2.46-3.05)	.82-1.02 (2.08-2.59)	.73-.90 (1.85-2.29)	.65-.80 (1.65-2.03)	.59-.72 (1.50-1.83)	.55-.67 (1.40-1.70)	2.00-2.49 (5.08-6.32)
1.45-1.73 (3.68-4.39)	1.21-1.45 (3.07-3.68)	1.03-1.22 (2.62-3.10)	.91-1.08 (2.31-2.74)	.81-.96 (2.06-2.44)	.73-.87 (1.85-2.21)	.68-.81 (1.73-2.06)	2.50-2.99 (6.35-7.59)
1.74-2.02 (4.42-5.13)	1.46-1.69 (3.71-4.29)	1.23-1.43 (3.12-3.63)	1.09-1.26 (2.77-3.20)	.97-1.11 (2.46-2.82)	.83-1.01 (2.11-2.57)	.82-.94 (2.08-2.39)	3.00-3.49 (7.62-8.86)
2.03-2.31 (5.16-5.87)	1.70-1.93 (4.32-4.90)	1.44-1.63 (3.66-4.14)	1.27-1.44 (3.23-3.66)	1.12-1.27 (2.84-3.23)	1.02-1.15 (2.59-2.92)	.95-1.08 (2.41-2.74)	3.50-3.99 (8.89-10.13)

Note: \*This chart is to be used for determining grip size when multiple cables are held in a single Conduit Riser Grip. For Support Grip multiple cable selection, see page V-36. It is always recommended that, when multiple cables are installed in a Conduit Riser Grip, the tail end of the grip be banded after installation on the cable bundle. See page Tech-23 for cable and wire charts.



## Features and Benefits

### Support Grips

Kellems has wide experience with grips for use with fiber optic cable. As the industry leader in producing wire mesh grips for the stringent requirements of fiber optic applications, Kellems has developed several series of grips for use with fiber optic communications cable.

These grips include pulling grips with built in swivels, grips with steel ends to protect fragile cable ends, grips with low profiles to pull cables in tight places and the OPTISOK® an effective tool to place pre-terminated cables. Also available are grips to support fiber optic cable.



CCPS2



PFOLT312



#### Non-Metallic

- OPTISOK® non-metallic fiber optic pulling tool for pre-terminated, inside plant fiber optic cables and bundles of twisted pair



#### Galvanized Steel

- Pulling grip for loose tube fiber optic cable
- These grips are used for outside plant cable; they are easy to install and remove, reusable and have a slim profile for small build up



#### Application

- Kellems flexible eye pulling grips for fiber optic cable are used for the installation of fiber optic communication lines either underground, overhead, through conduit or through enclosures
- They will fit single cables or cable bundles, are easily installed on the cable and are reusable



#### Comprehensive Offering

- Hubbell offers a full line of fiber optic pulling grips for all application needs
- OPTISOK® Grip is a revolutionary tool to pull pre-terminated fiber optic cables
- They will protect the connectors and guide the bundle through the pulling environment



## OPTISOK® Non-metallic Fiber Optic Pulling Tool for Pre-terminated, Inside Plant Fiber Optic Cables and Bundles of Twisted Pair

Kellems offers a unique and simple to use tool for the installation of pre-connectorized fiber optic cables, jumpers and bundles of twisted pair communication cables - the OPTISOK®.

The OPTISOK® is a highly flexible and expandable nonmetallic sleeve open on one end and with a pulling ring on the other. It will expand to enclose the larger group of fiber optic connectors and grab the cable below the connector bundle by wrapping and taping to provide a gripping tool that will grab the cable(s) below the connectors. The pulling ring can be attached to a pulling line or fish tape and the OPTISOK® will act as the pulling tool.

OPTISOK® will contain and protect the connector bundle and save time and labor by making the pulling job easier, protecting the connectors from possible damage during the pull and facilitating the passage of the connector bundle through cramped and tight spaces. The OPTISOK® can be used to pull cables through plenums, underfloor duct, office partitions, raised access floors and conduits. Three sizes are available for all applications.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### OPTISOK® Non-Metallic Fiber Optic Pulling Tool

Bundle/Size Range Inches (cm)	Approx. O/A Length Inches (cm)	Ring O.D. Inches (cm)	Ring Thickness Inches (cm)	Maximum Work Load Lbs. (N)	Catalog Number
.125"- .562" (.318-1.427)	28" (71.12)	.71" (1.803)	.10" (.254)	30 (133)	<b>CCPS1</b>
.250"- .750" (.635-1.905)	31" (78.74)	.71" (1.803)	.10" (.254)	40 (178)	<b>CCPS2</b>
.750"-1.750" (1.905-4.445)	33" (83.82)	1.57" (3.988)	.16" (.406)	50 (222)	<b>CCPS3</b>

### How to Select OPTISOK®

- Identify connector bundle diameter to be inserted into the OPTISOK®.
- Choose appropriate catalog number based on size range.

### Installation Information

**Step 1** Expand open end of OPTISOK® and gently work in fiber optic connector bundle.


**Step 2** Still gently, work connector bundle up to the forward section of the OPTISOK®.

**Step 3** Starting at approximately 6" (15.2cm) from tail end of OPTISOK®, tightly fold over the OPTISOK® around cables and tape wrapped section 3" (7.62cm) past tail end onto the bundle.

**Step 4** Securely attach pulling line or tape to pulling ring.

*Note: To remove OPTISOK® carefully unwrap tape and slide out cables and connectors or cut OPTISOK® away without damaging connectors or cables.*

#### Step 1

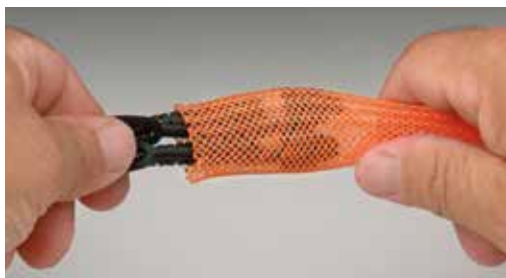

#### Step 2



#### Step 3



#### Step 4





## Pulling Grip for Loose Tube Fiber Optic Cable, Galvanized Steel

Kellems offers a wire mesh specifically designed to pull loose tube fiber optic cable and meet the special pulling requirements recommended by fiber optic cable manufacturers.

Many fiber optic cable manufacturers require special cable preparation prior to pulling where a short section of the outer jacket is stripped off exposing the aramid strength member. This creates two cable diameters, one including the jacket and a second smaller diameter at the strength member. Kellems fiber grip with its special weave will accommodate and securely grab both diameters, at the outside jacket and the internal aramid strength member.

Additionally, this galvanized steel mesh grip has longer leads at the pulling eye to facilitate pulling the cable up through the top, a very low profile lug and eye to slip through tight areas, and short shoulders to protect the cable while maintaining the slim profile.

The grip can be used to pull cable overhead as well as underground through conduit and duct. It easily mates with a swivel and has the necessary strength to securely make pulls.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

## Application Information

- Prior to pulling cable, follow cable manufacturers' cable preparation recommendations
- Never exceed cable manufacturers' pulling tension recommendations
- Never use grips to approximate breaking strength safety factor of 5 recommended



## Pulling Grip For Loose Tube Fiber Optic Cable, Galvanized Steel

Diameter Range Inches (cm)	Mesh Length Inches (cm)	Eye Length Inches (cm)	Eye Diameter Inches (cm)	Lug Diameter Inches (cm)	Maximum Breaking Strength Lbs. (N)	Catalog Number
.312"-.625" (.79-1.59)	22.5" (57.15)	6.3" (16.00)	.20" (.51)	.51" (1.30)	3,000 (13,344)	<b>PFOLT312</b>



## Pulling Grips for Other Outside Plant Cables, Swivel Eye, Flexible Eye, Split Style, Low Profile

Kellems Pulling Grips for fiber optic cable are made of high strength galvanized steel strand. They feature a multiweave mesh, with one-half the mesh length double weave, and the second half single weave. This special weave provides positive holding power while allowing the grip to remain flexible with no damage to the cable jacket. Added features include a steel nose cone which protects the cable end and allows the grip to pass easily through conduit and enclosures. The eye connects easily to a swivel or a pulling line. Several grip sizes are available to accommodate all diameters of fiber optic cable.

### IMPORTANT


Read all breaking strength, safety and technical data relating to this product.

### Application

Kellems Flexible Eye Pulling Grips for fiber optic cable are used for the installation of fiber optic communication lines either underground, overhead, through conduit or through enclosures. They will fit single cables or cable bundles, are easily installed on the cable and are reusable.


### Benefits

- High strength multiweave mesh for positive holding power
- Highly flexible mesh to follow the pulling path of the cable
- Steel nose cone reduces snags and hang-ups and protects cable end
- Easily installed and removed
- A dependable, reusable pulling tool

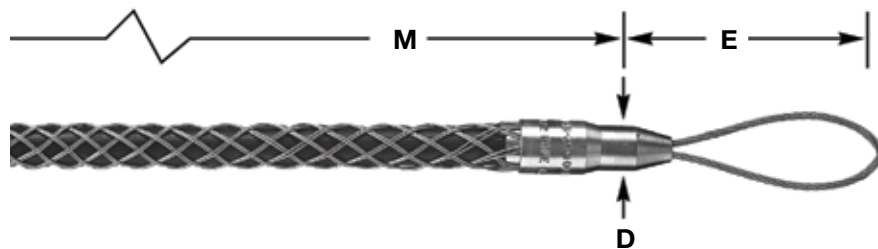

### Fiber Optic Pulling Grip, Flexible Eye

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	D Approx. Inches (cm)	Catalog Number
.10"-.22" (.25-.56)	1,000 (4,448)	5.5" (14)	9" (23)	0.8" (2)	<b>033291000</b>
.21"-.35" (.53-.89)	1,500 (6,672)	5.5" (14)	14" (36)	0.8" (2)	<b>033291001</b>
.32"-.48" (.81-1.22)	2,200 (9,786)	6.0" (15)	18" (46)	0.9" (2.29)	<b>033291002</b>
.42"-.61" (1.07-1.55)	2,800 (12,454)	6.0" (15)	21" (53)	0.9" (2.29)	<b>033291003</b>
.53"-.74" (1.35-1.88)	3,300 (14,678)	6.5" (17)	24" (61)	1.3" (3.30)	<b>033291004</b>
.64"-.87" (1.63-2.21)	4,700 (20,906)	6.5" (17)	27" (69)	1.3" (3.30)	<b>033291005</b>

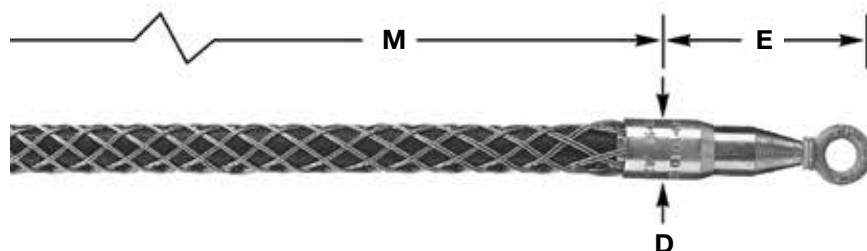

### Fiber Optic Pulling Grip, Swivel Eye

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	D Approx. Inches (cm)	Catalog Number
.21"-.35" (.53-.89)	1,500 (6,672)	4.0" (10.16)	14" (35.56)	0.9" (2.29)	<b>033291008</b>
.32"-.48" (.81-1.22)	2,200 (9,786)	4.0" (10.16)	18" (45.72)	0.9" (2.29)	<b>033291009</b>
.42"-.61" (1.07-1.55)	2,800 (12,454)	4.0" (10.16)	21" (53.34)	0.9" (2.29)	<b>033291010</b>
.53"-.74" (1.35-1.88)	3,250 (14,457)	4.8" (12.19)	24" (60.96)	1.3" (3.30)	<b>033291011</b>
.64"-.87" (1.63-2.21)	4,700 (20,906)	4.8" (12.19)	27" (68.58)	1.3" (3.30)	<b>033291012</b>

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Pulling Grips for Other Outside Plant Cables, Swivel Eye, Flexible Eye, Split Style, Low Profile

Kellems Pulling Grips for fiber optic cable are made of high strength galvanized steel strand. They feature a multiweave mesh, with one-half the mesh length double weave, and the second half single weave. This special weave provides positive holding power while allowing the grip to remain flexible with no damage to the cable jacket. Added features include a steel nose cone which protects the cable end and allows the grip to pass easily through conduit and enclosures. The eye connects easily to a swivel or a pulling line. Several grip sizes are available to accommodate all diameters of fiber optic cable.

### IMPORTANT


Read all breaking strength, safety and technical data relating to this product.

### Application

Kellems Flexible Eye Pulling Grips for fiber optic cable are used for the installation of fiber optic communication lines either underground, overhead, through conduit or through enclosures. They will fit single cables or cable bundles, are easily installed on the cable and are reusable.


### Benefits

- High strength multiweave mesh for positive holding power
- Highly flexible mesh to follow the pulling path of the cable
- Steel nose cone reduces snags and hang-ups and protects cable end
- Easily installed and removed
- A dependable, reusable pulling tool

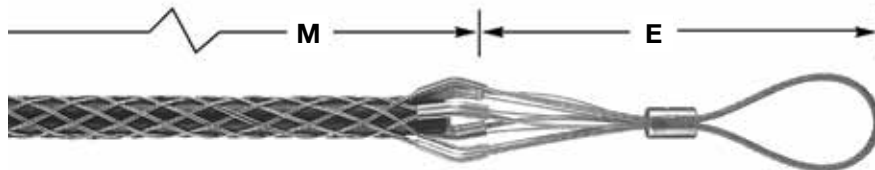

### Fiber Optic Pulling Grip, Flexible Eye, Low Profile, Double/Single Weave Mesh

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	Catalog Number
.10"-.22 (.25-.56)	900 (4,003)	7.5" (19)	10" (25)	<b>033291193</b>
.21"-.35" (.53-.89)	1,400 (6,227)	7.5" (19)	14" (36)	<b>033291194</b>
.32"-.48" (.81-1.22)	2,000 (8,896)	8.5" (22)	19" (48)	<b>033291195</b>
.42"-.61" (1.07-1.55)	2,500 (11,120)	8.5" (22)	21" (53)	<b>033291196</b>
.53"-.74" (1.35-1.88)	3,000 (13,344)	8.5" (22)	23" (58)	<b>033291197</b>
.64"-.87" (1.63-2.21)	4,200 (18,682)	8.5" (22)	25" (64)	<b>033291198</b>
.75"-.1.00" (1.90-2.54)	4,200 (18,682)	8.5" (22)	28" (71)	<b>033291199</b>

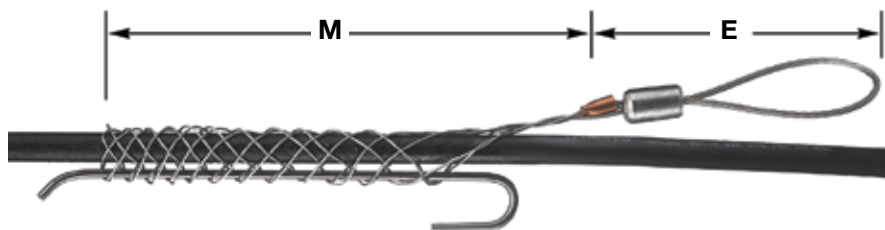

### Fiber Optic Slack Pulling Grip, Split Mesh Rod Closing, Single Weave

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	Catalog Number
.25"-.37" (.63-.94)	300 (1,334)	3" (7.6)	4.7" (12)	<b>033291015</b>
.38"-.49" (.97-1.24)	800 (3,558)	3" (7.6)	5" (13)	<b>033291016</b>
.50"-.61" (1.27-1.55)	800 (3,558)	3" (7.6)	7.5" (19)	<b>033291017</b>
.62"-.74" (1.57-1.88)	1,200 (5,338)	3" (7.6)	8" (20)	<b>033291018</b>

Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Pulling Grips for Other Outside Plant Cables, Swivel Eye, Flexible Eye, Split Style, Low Profile

Kellems Support Grips for fiber optic cable are specially designed to hold the cable weight as it hangs in a vertical or horizontal position. Fiber optic cable must be supported and Kellems Grips provide the support easily and economically.

These grips are made of high grade, non-magnetic tin-coated bronze strand. They are offered in universal bale or single eye configurations and are available in either closed mesh (for use where the cable end is available) or in split mesh, rod closing (for installation on existing cable runs or at specific locations).

**IMPORTANT**  
Read all breaking strength, safety and technical data relating to this product.

### Fiber Optic Single Eye Cable Support Grip, Closed Mesh, Single Weave

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	Catalog Number
.18"-.25" (.46-.63)	300 (1,334)	3" (7.6)	1.7" (4.3)	<b>022291000</b>
.23"-.32" (.58-.81)	300 (1,334)	3" (7.6)	2.5" (6.4)	<b>022291001</b>
.30"-.39" (.76-.99)	300 (1,334)	4" (10)	2.5" (6.4)	<b>022291002</b>
.37"-.48" (.94-1.22)	300 (1,334)	5" (13)	4" (10)	<b>022291003</b>
.46"-.58" (1.17-1.47)	400 (1,779)	6" (15)	4" (10)	<b>022291004</b>
.56"-.71" (1.42-1.80)	600 (2,669)	7" (18)	5.5" (14)	<b>022291005</b>
.69"-.88" (1.75-2.24)	800 (3,558)	8" (20)	6" (15)	<b>022291006</b>



### Fiber Optic Single Eye Cable Support Grip, Split Mesh, Rod Closing, Single Weave

For support when cable end not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	Catalog Number
.18"-.25" (.46-.63)	300 (1,334)	3" (7.6)	2.5" (6.4)	<b>022291016</b>
.23"-.32" (.58-.81)	300 (1,334)	3" (7.6)	2.5" (6.4)	<b>022291017</b>
.30"-.39" (.76-.99)	300 (1,334)	4" (10)	2.5" (6.4)	<b>022291018</b>
.37"-.48" (.94-1.22)	300 (1,334)	5" (13)	4" (10)	<b>022291019</b>
.46"-.58" (1.17-1.47)	400 (1,779)	6" (15)	5" (13)	<b>022291020</b>
.56"-.71" (1.42-1.80)	600 (2,669)	7" (18)	5" (13)	<b>022291021</b>
.69"-.88" (1.75-2.24)	800 (3,558)	8" (20)	6" (15)	<b>022291022</b>



Note: E-Eye length. M-Mesh length at nominal diameter.

Dimensions in Inches (mm)



## Support Grips for Fiber Optic Cable

Kellems Support Grips for fiber optic cable are specially designed to hold the cable weight as it hangs in a vertical or horizontal position. Fiber optic cable must be supported and Kellems Grips provide the support easily and economically.

These grips are made of high grade, non-magnetic tin-coated bronze strand. They are offered in universal bale or single eye configurations and are available in either closed mesh (for use where the cable end is available) or in split mesh, rod closing (for installation on existing cable runs or at specific locations).

## Split Support Grip Rod Closing Instructions

The stainless steel rod is a precise built-in feature which makes threading easy and fast. The strands of the mesh pass around the rod and match up with the strands from the opposite direction. The rod does not touch the cable at any point and therefore cannot cut the cable. Rod Closing Grips are reusable. They may be removed and reused as many times as desired.

### Fast to Install

- Step 1** Wrap the grip around the cable and thread the rod through the preformed loops with a corkscrew motion, using the curved end of the rod to engage the loops.
- Step 2** The action required is a steady push and twist simultaneously. The fingers of the left hand are used to bring the loops together just ahead of the hook on the end of the rod.
- Step 3** To remove, simply pull the rod out.





Kellems has wide experience with grips for use with fiber optic cable. As the industry leader in producing wire mesh grips for the stringent requirements of fiber optic applications, Kellems has developed several series of grips for use with fiber optic communications cable.

These grips include pulling grips with built in swivels, grips with steel ends to protect fragile cable ends, grips with low profiles to pull cables in tight places and the OPTISOK® an effective tool to place pre-terminated cables. Also available are grips to support fiber optic cable.

## Select the Correct Fiber Optic Grip

Each Kellems grip is designed to work on a specific range of cable diameters.

- Step 1** Determine your cable outside diameter.
- Step 2** Find the grip size that encompasses your cable diameter.
- Step 3** Whenever possible, use a closed mesh that assembles over the cable end. If the cable end is not available, use a split mesh.
- Step 4** Where available, select an eye style that suits your needs.
- Step 5** Estimate the tension to be put on the grip, establish the working load you require and compare this to the listed approximate breaking strength of the grip to insure that the grip will be strong enough.

## Safety And Working Load Factors For Wire Mesh Grips

The broad application of Kellems grips on a wide variety of objects requires that adequate safety factors be used to establish working loads. The approximate breaking strength of a Kellems grip represents an average calculation based on data established from actual direct tension testing done in our engineering laboratories.

It is impossible to catalog or guarantee a safety factor suitable for all applications as operating conditions are never the same. The tension, diameter, movement, number of objects gripped, gripping surface, and the attachments used are just some of the factors which vary with each application. These factors, together with the effects of abrasion, corrosion, prior use or abuse and any other variables of a specific application, must be considered by the user and the grip replaced as appropriate. Where the conditions of the application are not well defined or known

or where risk of injury to persons or property is involved, a greater safety factor should be utilized.

### IMPORTANT

**Under normal conditions, Kellems' recommended factor of safety is five for catalog listed pulling grips, and ten for catalog listed support grips.**

Any warranty as to quality, performance or fitness for use of grips is always premised on the condition that the published breaking strengths apply only to new, unused grips, and that such products are properly stored, handled, used, maintained and inspected by the user at a frequency appropriate for the use and condition of the grip.

For grip applications on materials other than those that the grips have been specifically designed for, consult the factory.

## Examples

Grip Style	Approx. Breaking Strength Lbs. (N)	Safety Factor	Max. Recommended Load Lbs. (N)	Catalog Number
Pulling Grips	2,500 (11,120)	5	500 (2,224)	<b>033291196</b>
Support Grips	400 (1,779)	10	40 (178)	<b>022291004</b>

The maximum recommended working load is the tension to be exerted on the grip in application with a margin of safety to take care of unforeseen and unusual circumstances.

It is the end-user's decision to determine how much of a safety factor is acceptable to for the application.

## Fiber Optic Grip Materials

Material	Features	Product Group
Galvanized steel wire	<ul style="list-style-type: none"> <li>• High strength</li> <li>• Not subject to continuous outside environment</li> </ul>	<ul style="list-style-type: none"> <li>• Pulling grips</li> </ul>
Tin-coated bronze wire	<ul style="list-style-type: none"> <li>• Corrosion resistant for normal outside areas</li> <li>• Non-magnetic</li> <li>• Moderate strength</li> </ul>	<ul style="list-style-type: none"> <li>• Support grips</li> </ul>
Non-metallic braid	<ul style="list-style-type: none"> <li>• Superior flex life</li> <li>• Non-conductive</li> <li>• Corrosion resistant</li> <li>• Moderate strength</li> </ul>	<ul style="list-style-type: none"> <li>• OPTISOK®</li> </ul>

## Approvals

CSA Certification is indicated on appropriate product catalog pages.



## Hose Containment Grips

Kellems® Hose Containment Grips are used on high pressure, flexible hose lines to prevent the hose from whipping violently in the event of hose failure at the fitting. These grips will prevent serious injury to personnel and damage to equipment by holding the hose in place in the event of hose failure.


Kellems® patented Hose Containment Grips are made of stainless steel double weave mesh construction for high strength and come complete with hose clamps.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

## Types of Attachment


The six attachment methods shown below provide unlimited flexibility of attachment to meet any condition.

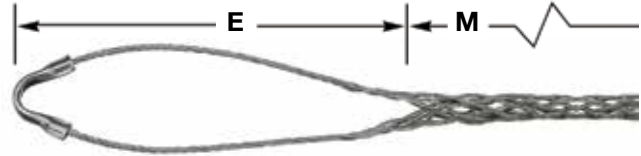

### Type A

Single Eye, used where fastening is made with eyebolts or similar anchor terminations.


Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.38"-.69" (.97-1.75)	2,900 (12,900)	10" (25)	24" (61)	<b>014021285</b>
.50"-.94" (1.27-2.39)	3,400 (15,124)	10" (25)	24" (61)	<b>014021230</b>
1.00"-1.56" (2.54-3.96)	9,400 (41,813)	10" (25)	36" (91)	<b>014021453</b>
1.25"-1.94" (3.18-4.93)	14,400 (64,055)	48" (122)	60" (152)	<b>014021593</b>
2.75"-3.44" (6.99-8.74)	12,500 (55,603)	10" (25)	48" (122)	<b>014021524</b>

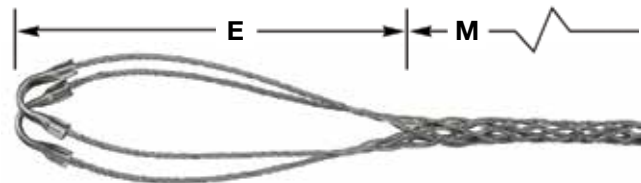

### Type E

Double Eye Grip, used where fastening is made with eyebolts or similar anchor terminations.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.50"-.94" (1.27-2.39)	4,250 (18,905)	8" (20)	24" (61)	<b>014021224</b>
.75"-1.25" (1.91-3.18)	6,000 (26,689)	8" (20)	24" (61)	<b>014021223</b>
1.00"-1.56" (2.54-3.96)	8,000 (35,586)	8" (20)	24" (61)	<b>014021279</b>

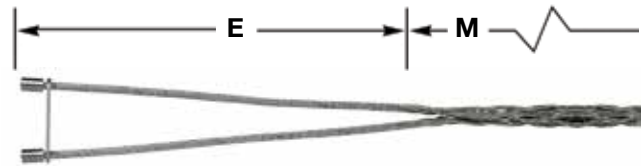

### Type U

Universal Bale Grip, used to fasten around a structure or closed eye.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.31"-.56" (.79-1.42)	2,100 (9,341)	12" (30)	24" (61)	<b>014021304</b>
.38"-.69" (.97-1.75)	2,600 (11,565)	12" (30)	24" (61)	<b>014021308</b>
.50"-.94" (1.27-2.39)	3,100 (13,789)	12" (30)	24" (61)	<b>014021138</b>
.50"-.94" (1.27-2.39)	3,100 (13,789)	24" (61)	24" (61)	<b>014021139</b>
.75"-1.25" (1.91-3.18)	4,500 (20,017)	12" (30)	24" (61)	<b>014021140</b>
1.00"-1.56" (2.54-3.96)	6,000 (26,689)	12" (30)	24" (61)	<b>014021142</b>
1.25"-1.94" (3.18-4.93)	6,000 (26,689)	12" (30)	36" (91)	<b>014021527</b>

Note: E- Eye length. M-Mesh length at nominal diameter.

It should be emphasized that Kellems® Hose Containment Grips are not to be used as a pressure reinforcing device for hose systems. These grips are custom made. Consult Technical Services for details.

Dimensions in Inches (mm)




## Hose Containment Grips

Kellems Hose Containment Grips are supplied in diameters, length and attachments to meet individual requirements. Contact the Wiring Device-Kellems factory for specific information. These grips help meet OSHA Federal Register 1926-302 (b), 1926-603 (9), (10), JIC H-1-1973 (H13.11) and JIC P-1-1975 (P11.34) requirements.

### IMPORTANT


Read all breaking strength, safety and technical data relating to this product.

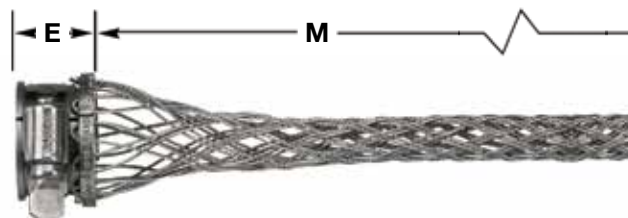

### Type F

Split fitting to fit AN-818 nuts. Fitting is positioned over nut and located with internal flange. A hose clamp is furnished and required to hold the fitting in correct position.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.38"-.69" (.97-1.75)	2,900 (12,900)	1" (2.54)	24" (61)	<b>014021208</b>
.50"-.94" (1.27-2.39)	3,400 (15,124)	1" (2.54)	24" (61)	<b>014021156</b>
.50"-.94" (1.27-2.39)	3,400 (15,124)	1" (2.54)	12" (30)	<b>014021185</b>
.50"-.94" (1.27-2.39)	3,400 (15,124)	1" (2.54)	12" (30)	<b>014021186</b>
.50"-.94" (1.27-2.39)	3,400 (15,124)	1" (2.54)	24" (61)	<b>014021216</b>
.75"-1.25" (1.91-3.18)	6,000 (26,689)	1" (2.54)	24" (61)	<b>014021113</b>
.75"-1.25" (1.91-3.18)	6,000 (26,689)	1" (2.54)	12" (30)	<b>014021120</b>
.75"-1.25" (1.91-3.18)	6,000 (26,689)	1" (2.54)	24" (61)	<b>014021301</b>
1.00"-1.56" (2.54-3.96)	6,000 (26,689)	1" (2.54)	24" (61)	<b>014021157</b>
1.00"-1.56" (2.54-3.96)	8,000 (35,586)	1.12" (2.84)	24" (61)	<b>014021366</b>
1.25"-1.94" (3.18-4.93)	8,000 (35,586)	1.12" (2.84)	36" (91)	<b>014021314</b>

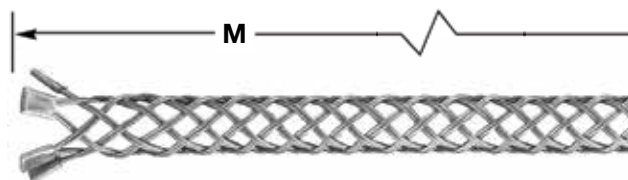

### Type T

Tube Grips obtain complete grip coverage when hose is partially covered at either end with attachment grips. Type T-Grips fill in the exposed hose area between the two end grips. A telescoped assembly permits overlap to any degree desired beyond the 3" minimum.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.50"-.94" (1.27-2.39)	3,400 (15,124)	—	24" (61)	<b>014021152</b>
.75"-1.25" (1.91-3.18)	6,000 (26,689)	—	24" (61)	<b>014021085</b>
1.44"-2.19" (3.66-5.56)	12,500 (55,603)	—	48" (122)	<b>014021075</b>

Note: E- Eye length. M-Mesh length at nominal diameter.



### Type Y

Threaded bolt (5/16 – 18 x 1 1/2" long), used to fasten through drilled holes in a plate.

Note: Available upon request.

It should be emphasized that Kellems® Hose Containment Grips are not to be used as a pressure reinforcing device for hose systems. Kellems® Hose Containment Grips are supplied in diameters, length and attachments to meet individual requirements. Contact Technical services for specific information.

Dimensions in Inches (mm)



## Strain Relief System Selection Chart








Kellems Strain Relief Grips are designed to prevent tension from being transmitted to joints and terminals on electrical cord, cable and conduit. In most applications, a Kellems grip for strain relief is stronger than the cable itself and gives much greater security than the use of a fitting alone. Kellems Grips for strain relief help make electrical systems safer, and save money by minimizing downtime from costly electrical failure due to cable pull-out. Kellems Grips also aid in compliance with the National Electric Code's terminal tension protection requirements.

## Select the Correct Grip for Strain Relief

Kellems Grips for strain relief are designed to fit on electrical cord, cable or flexible conduit.

- Step 1** Refer to the chart below to determine the grip style best suited for your application.
- Step 2** Determine your cable outside diameter or conduit size.
- Step 3** Locate environment—indoors or outdoors.
- Step 4** Decide if a liquidtight seal is required.
- Step 5** Select NPT size and fitting style.

## Strain Relief System Selection Chart

Grip Type	Application	Features	Cord or Conduit Range Inches (cm)	Type Fitting or Attachment	Page Number
<b>Deluxe Cord Aluminum Fitting/ Stainless Steel Grip</b>	 Outdoors or indoors where subjected to moisture or splash. Examples are crane and hoist pendant drop stations, hand tools, pumps and processing equipment.	Aluminum fittings, stainless steel mesh, neoprene oil-and-watertight bushing. Double-single weave.	.187"-3.250" (.47-8.25)	NPT, PG, and metric aluminum, male straight, 45° male, 90° male, female straight. Thread sizes 3/8"-3".	V-50, V-51, V-54
<b>Deluxe Cord Nylon Fitting/ Stainless Steel Grip</b>	 Outdoors or indoors where subjected to moisture or splash. Examples are marine and food processing equipment.	Nylon fitting, stainless steel mesh, double-single weave, neoprene oil-and-watertight bushing.	.187"-1.125" (.47-2.86)	NPT nylon, male straight, 90° male. Thread sizes 1/2"-1".	V-52
<b>Deluxe Cord Nylon Fitting/ Non-metallic Grip</b>	 Indoor or outdoors. Provides liquidtight seal, where exposed to moisture. Excellent for oil refining and chemical processing.	Non-metallic grip is corrosion resistant, nonconductive and provides superior gripping and flexing benefits. Neoprene liquidtight bushing. Nylon fitting.	.187"-1.000" (.47-2.54)	NPT nylon, straight male, thread sizes 3/8"-1" 90° male, thread sizes 1/2"-1".	V-53
<b>Deluxe Cord Stainless Steel Fitting And Grip</b>	 Indoor or outdoor use where exposed to moisture. Very strong for heavy abuse areas such as drilling platforms, steel mills and mines.	Stainless steel fitting and grip for strength. Neoprene liquidtight bushing. Double/single weave grip.	.187"-1.000" (.47-2.54)	Straight male Only with NPT Thread sizes 1/2"-1".	V-53
<b>Dust-Tight Strain Relief</b>	 Indoor use only for wiring of electrical enclosures, machine tools, portable power tools, bus drop cable systems.	Neoprene gasket—seals out chips, dirt, dust. One piece design with galvanized steel mesh. Insulating bushing available. Zinc-plated steel locknut.	.240"-2.450" (.61-6.22)	Straight male NPS or NPT	V-55
<b>Liquidtight Flexible Conduit Grip (Metal and Non-Metallic)</b>	 Wiring of machine tools, electrical enclosures, motors and systems where metallic liquidtight flexible conduit is subjected to vibration, flexure, motion or strain.	Stainless steel mesh, liquidtight fittings. Sealing "O" rings (optional). Choice of fittings.	.375"-4.000" trade sizes	NPT 1/2"-4", Hubbell fittings, Male straight, 45° male, 90° male, female straight.	V-58, V-59
<b>Liquidtight Flexible Conduit Grip (UL Type A)</b>	 Wiring or machine tools, electrical enclosures, motors and systems where conduit is subject to vibration and strain.	Stainless steel mesh, liquidtight fittings with "O" ring and locknut.	.375"-2.008" trade size male	NPT steel, Hubbell fittings, straight male, 90° Thread sizes 1/2"-2".	V-60





## Features and Benefits

### Deluxe Cord Grip

Deluxe cord grips help to alleviate pull tension on terminals, control cable arc-of-bend, prevent cord pull-out and provide a liquidtight seal. They are offered with either aluminum, stainless steel or nylon fittings in a variety of configurations and NPT thread sizes. Additionally, a completely non-metallic product is available.

### Application

Specific uses are: wiring enclosures, pendant stations, hand tools, construction, processing and material handling equipment, pumps, motors and machine tools.

### Benefits

- Helps to prevent cable pull-out
- Controls cable arc-of-bend
- Provides a liquidtight seal
- Corrosion resistant stainless steel mesh with aluminum collar



07401008




#### Mesh Grip

- Stainless steel mesh is corrosion resistant; can be used inside or outside
- Eliminates cable or flexible conduit pull out and reduces costly downtime
- Endless weave provides easy cable/flexible conduit installation



#### Deluxe Cord Grips

- An NPT and PG threaded body allows easy attachment to either threaded hub or knock-out in box
- A liquidtight fitting is available with both cable and conduit fittings; prevents liquids from running through the fitting into the enclosure



#### Cable Protection

- Multiweave grip gives cable arc-of-bend control minimizing cable damage and extending cable life
- It is the strongest strain relief device available; meets and exceeds all code requirements; prevents cable/conduit pull-out



#### Comprehensive Offering

- Hubbell offers a full line of deluxe cord grips with various material finishes
- Deluxe cord grips are used indoors or outdoors to help prevent cord pull-out and where cables are subjected to moisture, splash or submersion



## Deluxe Cord Grips

Aluminum Fittings, Stainless Steel Mesh, Liquidtight for Insulated Cables


### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Straight Male Thread



NPT Thread Size Inches	Grip Diameter Range Inches (cm)	Form Size	Catalog Number
3/8	.250"-.312" (.63-.79)	F1	07401001
	.312"-.375" (.79-.95)		07401002
	.375"-.437" (.95-1.11)		07401003
1/2	.187"-.250" (.47-.63)	F2	07401004
	.250"-.375" (.63-.95)		07401006
	.375"-.500" (.95-1.27)		07401008
1/2	.500"-.625" (1.27-1.59)	F3	07401010
	.625"-.750" (1.59-1.90)		074011247*
	.750"-.875" (1.90-2.22)		074011248*
3/4	.187"-.250" (.47-.63)	F2	07401011
	.250"-.375" (.63-.95)		07401013
	.375"-.500" (.95-1.27)		07401015
3/4	.500"-.625" (1.27-1.59)	F3	07401017
	.625"-.750" (1.59-1.90)		07401018
	.750"-.875" (1.90-2.22)		074011249*
1	.375"-.500" (.95-1.27)	F4	074011195
	.500"-.625" (1.27-1.59)		07401019
	.625"-.750" (1.59-1.90)		07401021
1	.750"-.875" (1.90-2.22)	F5	07401023
	.875"-.1.000" (2.22-2.54)		07401025
	1.000"-.1.125" (2.54-2.86)		074011250*
1	1.125"-.1.250" (2.86-3.17)	F5	074011028*
	1.250"-.1.375" (3.17-3.49)		074011029*
	.750"-.875" (1.90-2.22)		074011251
1 1/4	.875"-.1.000" (2.22-2.54)	F5	07401026
	1.000"-.1.125" (2.54-2.86)		07401027
	1.125"-.1.250" (2.86-3.17)		07401028
1 1/2	1.250"-.1.375" (3.17-3.49)	F5	074011178*
	.750"-.875" (1.90-2.22)		074011252
	.875"-.1.000" (2.22-2.54)		07401029
1 1/2	1.000"-.1.125" (2.54-2.86)	F5	07401030
	1.125"-.1.250" (2.86-3.17)		07401031
	1.250"-.1.375" (3.17-3.49)		07401032
1 1/2	1.312"-.1.437" (3.33-3.65)	F6	074011253
	1.437"-.1.562" (3.65-3.97)		074011254*
	1.562"-.1.687" (3.97-4.28)		074011255*
1 1/2	1.687"-.1.812" (4.28-4.60)	F6	074011256*
	1.750"-.1.875" (4.44-4.76)		074011257*
	1.250"-.1.375" (3.17-3.49)		074011258
2	1.312"-.1.437" (3.33-3.65)	F6	074011259
	1.437"-.1.562" (3.65-3.97)		07401033
	1.562"-.1.687" (3.97-4.28)		07401034
2	1.687"-.1.812" (4.28-4.60)	F7	07401035
	1.750"-.1.875" (4.44-4.76)		074011260
	1.812"-.1.937" (4.60-4.92)		074011261
2	1.937"-.2.062" (4.92-5.24)	F7	074011262*
	2.062"-.2.187" (5.24-5.55)		074011263*
	2.187"-.2.312" (5.55-5.87)		074011264*
2 1/2	2.312"-.2.437" (5.87-6.19)	F7	074011265*
	1.688"-.1.812" (4.29-4.60)		074011030
	1.812"-.1.937" (4.60-4.92)		074011031
2 1/2	1.937"-.2.062" (4.92-5.24)	F7	074011032
	2.062"-.2.187" (5.24-5.55)		074011033
	2.187"-.2.312" (5.55-5.87)		074011034
3	2.312"-.2.437" (5.87-6.19)	F7	074011266*
	1.937"-.2.062" (4.92-5.24)		074011036
	2.062"-.2.187" (5.24-5.55)		074011037
3	2.187"-.2.312" (5.55-5.87)	F8	074011038
	2.312"-.2.437" (5.87-6.19)		074011039
	2.437"-.2.625" (6.19-6.67)		074011186
3	2.625"-.2.812" (6.67-7.14)	F8	074011187
	2.812"-.3.000" (7.14-7.62)		074011188
	3.000"-.3.250" (7.62-8.25)		074011189*

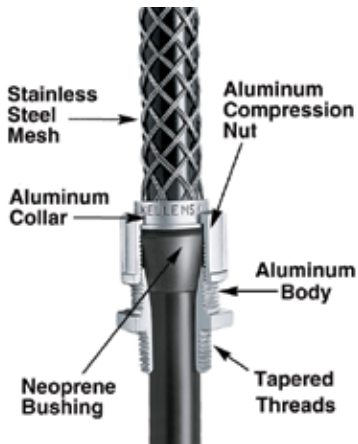

Note: Kellems® Deluxe Cord Grips are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 of the National Electric Code Sections 501.10(b)(2), 502.10(a)(2), 502.10(b)(2), 503.10(a)(2) and 503.10(b).  
\*Cable jacket may have to be stripped to pass through connector body.

Dimensions in Inches (mm)

## Deluxe Cord Grips

Aluminum Fittings, Stainless Steel Mesh, Liquidtight for Insulated Cables

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Straight Female Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)		Form Size	Catalog Number
½	.375"-.500"	(.95-1.27)	F2	<b>07401043</b>
	.500"-.625"	(1.27-1.59)		<b>07401045</b>
¾	.500"-.625"	(1.27-1.59)	F2	<b>07401052</b>
¾	.625"-.750"	(1.59-1.90)	F4	<b>07401053</b>

### 90° Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)		Form Size	Catalog Number
¾	.250"-.312"	(.63-.79)	F1	<b>07401071</b>
	.312"-.375"	(.79-.95)		<b>07401072</b>
	.375"-.437"	(.95-1.11)		<b>07401073</b>
½	.187"-.250"	(.47-.63)	F2	<b>07401074</b>
	.250"-.375"	(.63-.95)		<b>07401076</b>
	.375"-.500"	(.95-1.27)		<b>07401078</b>
¾	.500"-.625"	(1.27-1.59)	F3	<b>07401080*</b>
	.375"-.500"	(.95-1.27)		<b>07401081</b>
	.500"-.625"	(1.27-1.59)		<b>07401083</b>
1	.625"-.750"	(1.59-1.90)	F4	<b>07401084*</b>
	.750"-.875"	(1.90-2.22)		<b>07401085</b>
	.750"-.875"	(1.90-2.22)		<b>07401087</b>
1½	.875"-.1.000"	(2.22-2.54)	F5	<b>07401089</b>
	1.000"-.1.125"	(2.54-2.86)		<b>07401091*</b>
	1.000"-.1.125"	(2.54-2.86)		<b>074011229*</b>
2	1.125"-.1.250"	(2.86-3.17)	F6	<b>074011230</b>
	1.125"-.1.250"	(2.86-3.17)		<b>07401137</b>
	1.125"-.1.250"	(2.86-3.17)		<b>07401108</b>
2	1.250"-.1.375"	(3.17-3.49)	F6	<b>074011042*</b>
	1.312"-.1.437"	(3.33-3.65)		<b>074011045</b>
	1.312"-.1.437"	(3.33-3.65)		<b>074011046</b>
2	1.437"-.1.562"	(3.65-3.97)	F6	<b>074011047</b>
	1.687"-.1.812"	(4.28-4.60)		<b>074011233</b>
	1.687"-.1.812"	(4.28-4.60)		<b>074011244</b>
2	1.750"-.1.875"	(4.44-4.76)	F6	<b>074011246</b>
	1.750"-.1.875"	(4.44-4.76)		<b>074011234*</b>

### 45° Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)		Form Size	Catalog Number
½	.250"-.375"	(.63-.95)	F2	<b>074011236</b>
	.375"-.500"	(.95-1.27)		<b>074011021</b>
	.500"-.625"	(1.27-1.59)		<b>074011237*</b>
¾	.500"-.625"	(1.27-1.59)	F3	<b>074011049</b>
	.625"-.750"	(1.59-1.90)		<b>074011051*</b>
	.750"-.875"	(1.90-2.22)		<b>074011239*</b>
1	.625"-.750"	(1.59-1.90)	F4	<b>074011055</b>
	.750"-.875"	(1.90-2.22)		<b>074011057</b>
	.875"-.1.000"	(2.22-2.54)		<b>074011199*</b>
1¼	1.000"-.1.125"	(2.54-2.86)	F5	<b>074011059</b>
	1.125"-.1.250"	(2.86-3.17)		<b>074011060</b>

Note: Kellems® Deluxe Cord Grips are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 of the National Electric Code Sections 501.10(b)(2), 502.10(a)(2), 502.10(b)(2), 503.10(a)(2) and 503.10(b).

\*Cable jacket may have to be stripped to pass through connector body.



Dimensions in Inches (mm)



## Deluxe Cord Grips

Nylon Fittings, Stainless Steel Mesh, Liquidtight for Insulated Cables

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Straight Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)	Form Size	Catalog Number
1/2	.187"-.250" (.47-.63)	F2	<b>074011331</b>
	.250"-.375" (.63-.95)		<b>074011332</b>
	.375"-.500" (.95-1.27)		<b>074011333</b>
	.500"-.625" (1.27-1.59)		<b>074011334*</b>
3/4	.375"-.500" (.95-1.27)	F3	<b>074011335</b>
	.500"-.625" (1.27-1.59)		<b>074011336</b>
	.625"-.750" (1.59-1.90)		<b>074011337</b>
1	.750"-.875" (1.90-2.22)	F4	<b>074011338*</b>
	.625"-.750" (1.59-1.90)		<b>074011341</b>
	.750"-.875" (1.90-2.22)		<b>074011342</b>
	.875"-1.000" (2.22-2.54)		<b>074011343</b>
	1.000"-1.125" (2.54-2.86)		<b>074011344*</b>




### 90° Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)	Form Size	Catalog Number
1/2	.250"-.375" (.63-.95)	F2	<b>074011346</b>
	.375"-.500" (.95-1.27)		<b>074011347</b>
	.500"-.625" (1.27-1.59)		<b>074011348*</b>
3/4	.375"-.500" (.95-1.27)	F3	<b>074011349</b>
	.500"-.625" (1.27-1.59)		<b>074011350</b>
	.625"-.750" (1.59-1.90)		<b>074011351*</b>

Note: Kellems® Deluxe Cord Grips are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 of the National Electric Code Sections 501.10(b)(2), 502.10(a)(2), 502.10(b)(2), 503.10(a)(2) and 503.10(b).

\*Cable jacket may have to be stripped to pass through connector body.

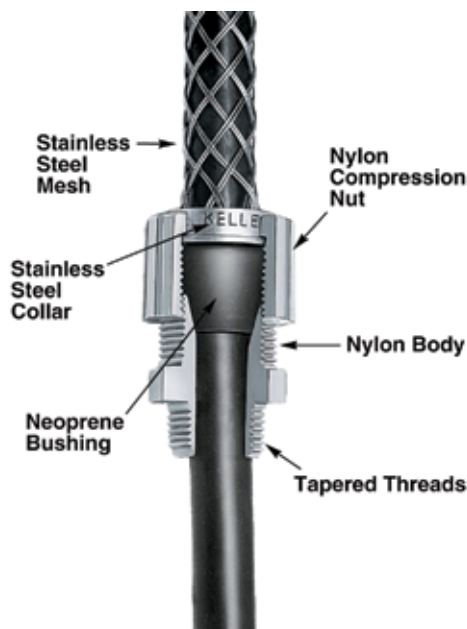

Dimensions in Inches (mm)

## Deluxe Cord Grips

Nylon Fittings, Non-metallic Mesh, and Stainless Steel Fittings, Stainless Steel Mesh, Liquidtight for Insulated Cables

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Nylon Fittings Non-metallic Mesh, Liquidtight for Insulated Cables Straight Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)		Form Size	Catalog Number
3/8	.187"-.250"	(.47-.63)	F1	<b>CG304NM</b> <b>CG305NM</b> <b>CG306NM</b>
	.250"-.312"	(.63-.79)		
	.312"-.375"	(.79-.95)		
1/2	.187"-.250"	(.47-.63)	F2	<b>CG404NM</b> <b>CG406NM</b> <b>CG408NM</b>
	.250"-.375"	(.63-.95)		
	.375"-.500"	(.95-1.27)		
3/4	.375"-.500"	(.95-1.27)	F3	<b>CG608NM</b> <b>CG610NM</b> <b>CG612NM</b>
	.500"-.625"	(1.27-1.59)		
	.625"-.750"	(1.59-1.90)		
1	.500"-.625"	(1.27-1.59)	F4	<b>CG810NM</b> <b>CG812NM</b> <b>CG814NM</b> <b>CG816NM</b>
	.625"-.750"	(1.59-1.90)		
	.750"-.875"	(1.90-2.22)		
	.875"-.1.000"	(2.22-2.54)		



### 90° Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)		Form Size	Catalog Number
1/2	.250"-.375"	(.63-.95)	F2	<b>CG40690NM</b> <b>CG40890NM</b>
	.375"-.500"	(.95-1.27)		
3/4	.375"-.500"	(.95-1.27)	F3	<b>CG60890NM</b> <b>CG61090NM</b> <b>CG61290NM*</b>
	.500"-.625"	(1.27-1.59)		
	.625"-.750"	(1.59-1.90)		
1	.625"-.750"	(1.59-1.90)	F4	<b>CG81290NM</b> <b>CG81490NM</b>
	.750"-.875"	(1.90-2.22)		



### Stainless Steel Fittings, Stainless Steel Mesh, Liquidtight for Insulated Cables Straight Male Thread

NPT Thread Size Inches	Grip Diameter Range Inches (cm)		Form Size	Catalog Number
1/2	.187"-.250"	(.47-.63)	F2	<b>CG404SST</b> <b>CG406SST</b> <b>CG408SST</b> <b>CG410SST</b>
	.250"-.375"	(.63-.95)		
	.375"-.500"	(.95-1.27)		
	.500"-.625"	(1.27-1.59)		
3/4	.375"-.500"	(.95-1.27)	F2	<b>CG608SST</b> <b>CG610SST</b>
	.500"-.625"	(1.27-1.59)		
3/4	.625"-.750"	(1.59-1.90)	F3	<b>CG612SST</b> <b>CG614SST</b>
	.750"-.875"	(1.90-2.22)		
1	.500"-.625"	(1.27-1.59)	F4	<b>CG810SST</b> <b>CG812SST</b> <b>CG814SST</b> <b>CG816SST</b>
	.625"-.750"	(1.59-1.90)		
	.750"-.875"	(1.90-2.22)		
	.875"-.1.000"	(2.22-2.54)		



Note: Kellems® Deluxe Cord Grips are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 of the National Electric Code Sections 501.10(b)(2), 502.10(a)(2), 502.10(b)(2), 503.10(a)(2) and 503.10(b).  
\*Cable jacket may have to be stripped to pass through connector body.

Dimensions in Inches (mm)



## PG and Metric Threaded Deluxe Cord Grips

Aluminum Fittings, Stainless Steel Mesh, Liquidtight for Insulated Cables

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Straight PG\* Male Thread

Hub Size	Cord Diameter Range Inches (cm)		Form Size	Catalog Number
PG16	.500"-.625"	(1.27-1.59)	F2	<b>074PG16010</b>
PG21	.500"-.625"	(1.27-1.59)	F2	<b>074PG21010</b>
PG21	.625"-.750"	(1.59-1.90)	F3	<b>074PG211247</b>
	.750"-.875"	(1.90-2.22)		<b>074PG211248</b>
PG29	.625"-.750"	(1.59-1.90)	F4	<b>074PG29021</b>
	.750"-.875"	(1.90-2.22)		<b>074PG29023</b>
	.875"-1.000"	(2.22-2.54)		<b>074PG29025</b>
PG29	1.125"-1.250"	(2.86-3.17)	F5	<b>074PG291028*</b>
PG36	1.125"-1.250"	(2.86-3.17)	F5	<b>074PG36028*</b>

Note: \*Panzergewinde.



### Straight Metric Male Thread

Hub Size	Cord Diameter Range Inches (cm)		Form Size	Catalog Number
M20	.500"-.625"	(1.27-1.59)	F2	<b>074M20010</b>
M25	.625"-.750"	(1.59-1.90)	F3	<b>074M251247</b>
	.750"-.875"	(1.90-2.22)		<b>074M251248</b>
M25	.500"-.625"	(1.27-1.59)	F2	<b>074M25017</b>
	.625"-.750"	(1.59-1.90)		<b>074M32021</b>
	.750"-.875"	(1.90-2.22)		<b>074M32023</b>
M32	.875"-1.000"	(2.24-2.54)	F4	<b>074M32025</b>
	1.000"-1.125"	(2.54-2.86)		<b>074M321250</b>
M32	1.125"-1.250"	(2.86-3.17)	F5	<b>074M321028</b>

Note: Kellems® Deluxe Cord Grips are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 of the National Electric Code Sections 501.10(b)(2), 502.10(a)(2), 502.10(b)(2), 503.10(a)(2) and 503.10(b).

\*Cable jacket may have to be stripped to pass through connector body.

### Specifications

Material	Temperature Range
Aluminum (Body)	-30°F to +240°F (-34°C to +115°C).
Stainless Steel (Mesh)	-30°F to +240°F (-34°C to +115°C).
Neoprene (Bushings)	-30°F to +240°F (-34°C to +115°C).
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C. Reference 501.10(b)(2), 502.10(a)(2), 502.10(b)(2), 503.10(a)(2) and 503.10(b).
Approvals	
Deluxe Cord Grips	UL Listed in accordance with Standard 514B for indoor/outdoor use. UL Control numbers 898D and 899D.
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting.

Dimensions in Inches (mm)

## Dust-Tight Strain Relief Grips

Aluminum Fittings, Galvanized Steel Mesh for Insulated Cables

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Non-Insulated, Wide Range Strain Relief

Thread Size	Cord Diameter Range Inches (cm)	Mesh Length @ Nom. Dia. Inches (cm)	Catalog Number
½ NPT	.24"-.32" (.61-.81)	3.25" (8.25)	<b>073031200</b>
	.32"-.43" (.81-1.09)	3.75" (9.52)	<b>073031201</b>
	.43"-.54" (1.09-1.37)	4.75" (12.06)	<b>073031202</b>
¾ NPT	.54"-.73" (1.37-1.85)	6.5" (16.51)	<b>073031203A</b>
1 NPT	.73"-.97" (1.85-2.46)	7" (17.78)	<b>073031204</b>
1¼ NPT	.97"-1.25" (2.46-3.17)	9" (22.86)	<b>073031205</b>
PG29*	.73"-.97" (1.85-2.46)	7" (17.78)	<b>073PG291204</b>

Note: \*Panzergewinde.



### Insulated, Wide Range Strain Relief with Insulating Bushing

Thread Size	Cord Diameter Range Inches (cm)	Mesh Length @ Nom. Dia. Inches (cm)	Dim. A Inches (cm)	Min. Space Between Grips Inches (cm)	Catalog Number
½ NPS	.24"-.32" (.61-.81)	3.25" (8.25)	1" (2.54)	1.25" (3.17)	<b>073031206</b>
	.32"-.43" (.81-1.09)	3.75" (9.52)	1" (2.54)	1.25" (3.17)	<b>073031207</b>
	.43"-.54" (1.09-1.37)	4.75" (12.06)	1" (2.54)	1.25" (3.17)	<b>073031208</b>
¾ NPS	.54"-.73" (1.37-1.85)	6.5" (16.51)	1" (2.54)	1.5" (3.81)	<b>073031209A</b>
1 NPS	.73"-.97" (1.85-2.46)	7" (17.78)	1.313" (3.02)	1.75" (4.44)	<b>073031210</b>
1¼ NPS	.97"-1.25" (2.46-3.17)	9" (22.86)	1.313" (3.02)	2.25" (5.71)	<b>073031211</b>
1½ NPT	1.25"-1.50" (3.17-3.81)	11.75" (29.84)	1.313" (3.02)	2.5" (6.35)	<b>073031212</b>
2 NPT	1.50"-1.70" (3.81-4.32)	13.25" (33.65)	1.375" (3.49)	3.25" (8.25)	<b>073031213</b>
2½ NPT	1.70"-2.00" (4.32-5.08)	13.5" (34.29)	1.5" (3.81)	3.625" (9.21)	<b>073031214</b>
	2.00"-2.45" (5.08-6.22)	13.75" (34.92)	1.5" (3.81)	3.625" (9.21)	<b>073031215</b>



Dimensions in Inches (mm)



## I-Grips for Insulated Cables

Kellems® I-Grips are made of high strength, plastic coated galvanized steel strand. They are offered in six sizes to fit all cable diameters used with Hubbell Insulgrip®. Kellems I-Grips will control cable arc-of-bend and reduce high pull tensions from being transmitted to the wiring terminals.

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Application

Kellems® I-Grips will fit 2, 3, 4 and 5 wire Hubbell Insulgrip® plugs and connector bodies. The eye tabs fit under the nylon cord clamp and the screws slide through the eyelets, securing the grip in place.

I-Grips can be used on any Insulgrip cord set which requires cable, arc-of-bend control or heavy duty strain relief. Cord sets used at in-door construction sites or for plant maintenance jobs are examples.

These grips are for indoor use only.

### Benefits

- Easily attached to Insulgrip plugs and connector bodies
- Controls cable arc-of-bend
- Provides heavy-duty strain relief
- Fits all sizes



### I-Grips

Cable Diameter Range Inches (cm)	E Inches (cm)	M Inches (cm)	Catalog Number
.32"-.43" (.81-1.09)	1.25" (3.17)	4" (10.16)	<b>07310001</b>
.43"-.56" (1.09-1.42)	1.25" (3.17)	4.75" (12.06)	<b>07310002</b>
.56"-.73" (1.42-1.85)	1.50" (3.81)	6" (15.24)	<b>07310003</b>
.73"-.85" (1.85-2.16)	1.50" (3.81)	6.5" (16.51)	<b>07310004</b>
.85"-1.00" (2.16-2.54)	1.50" (3.81)	8" (20.32)	<b>07310005</b>
1.00"-1.25" (2.54-3.17)	1.50" (3.81)	10" (25.40)	<b>07310006</b>

Note: E-Eye length. M-Mesh length at nominal diameter.

Eyelet hole diameter .203" (.52cm).

I-Grips should not be used on Insulgrip devices when "Seal-Tite®" weatherproof covers are to be installed.



## Thread Adapters for Multi-Pin Connectors

Kellems® Thread Adapters are devices formatting AN-MS connectors and other multi-pin connectors to Kellems grips with NPT threaded fittings. They are made of aluminum with internal threads and replace the connector cord clamp. These adapters permit the installation of Kellems Grips, to prevent cable or conduit pull-out and control arc-of-bend.

### Applications

Thread adapters allow the installation of Kellems® Grips on multi-pin connectors at electrical consoles, mobile equipment, control switches, assembly equipment and testing machines.

### Benefits

- Easy installation
- Allows the use of Kellems grips
- Extends connector and cable life



Thread Adapter  
**091041006**

### Thread Adapters for Multi-Pin Connectors


Thread Adapters					Deluxe Cord Grips		Strain Relief Grips		Liquidtight Conduit Grips (Insulated Throat)
AN-MS Connector Size**	AN-MS Cable Clamp Number***	Thread Size A Inch	NPT Thread Size B	Catalog Number	Cable Diameter Range Inches (cm)	Catalog Number	Cable Diameter Range Inches (cm)	Catalog Number	Catalog Number
8S, 10S	3057-3	1/2" x 28"		<b>091041000</b>	.250"-.312" (.63-.79)	07401001			
10SL, 12, 12S	3057-4	5/8" x 24"	3/8"	<b>091041001</b>	.312"-.375" (.79-.95)	07401002			
14, 14S	3057-6	3/4" x 20"		<b>091041002</b>	.375"-.437" (.95-1.11)	07401003			
14, 14S	3057-6	3/4" x 20"		<b>091041003</b>	.187"-.250" (.47-.63)	07401004	.24"-.32" (.61-.81)	073031200	
16, 16S	3057-8	7/8" x 20"	1/2"	<b>091041004</b>	.250"-.375" (.63-.95)	07401006	.32"-.43" (.81-1.09)	073031201	074093512
18	3057-10	1" x 20"		<b>091041006</b>	.375"-.500" (.95-1.27)	07401008	.43"-.54" (1.09-1.37)	073031202	
					.500"-.625" (1.27-1.59)	07401010*			
16, 16S	3057-8	7/8" x 20"		<b>091041005</b>	.187"-.250" (.47-.63)	07401011			
18	3057-10	1" x 20"	3/4"	<b>091041007</b>	.250"-.375" (.63-.95)	07401013			
20, 22	3057-12	1 1/16" x 18"		<b>091041008</b>	.375"-.500" (.95-1.27)	07401015	.54"-.74" (1.37-1.85)	073031203	074093513
					.500"-.625" (1.27-1.59)	07401017			
					.625"-.750" (1.59-1.90)	07401018			
20, 22	3057-12	1 1/16" x 18"		<b>091041009</b>	.375"-.500" (.95-1.27)	074011195			
24, 28	3057-16	1 1/16" x 18"		<b>091041010</b>	.500"-.625" (1.27-1.59)	07401019			
32	3057-20	1 3/4" x 18"	1	<b>091041012</b>	.625"-.750" (1.59-1.90)	07401021	.73"-.97" (1.85-2.46)	073031204	074093514
36	3057-24	2" x 18"		<b>091041015</b>	.750"-.875" (1.90-2.22)	07401023			
					.875"-.1.000" (2.22-2.54)	07401025			
24, 28	3057-16	1 1/16" x 18"		<b>091041011</b>	.750"-.875" (1.90-2.22)	074011251			
32	3057-20	1 3/4" x 18"	1 1/4"	<b>091041013</b>	.875"-.1.000" (2.22-2.54)	07401026	.97"-.1.25" (2.46-3.17)	073031205	074093515
36	3057-24	2" x 18"		<b>091041016</b>	1.000"-.1.125" (2.54-2.86)	07401027			
					1.125"-.1.375" (2.86-3.17)	07401028			
32	3057-20	1 3/4" x 18"		<b>091041014</b>	.875"-.1.000" (2.22-2.54)	07401029			
36	3057-24	2" x 18"	1 1/2"	<b>091041017</b>	1.000"-.1.125" (2.54-2.86)	07401030			
40	3057-28	2 1/4" x 16"		<b>091041019</b>	1.125"-.1.250" (2.86-3.17)	07401031			074093516
					1.250"-.1.375" (3.17-3.49)	07401032			

Note: \*Cable jacket may have to be stripped to pass through connector body.

\*\*Number stamped on connector shell.

\*\*\*Number stamped on clamp shell.

### Example

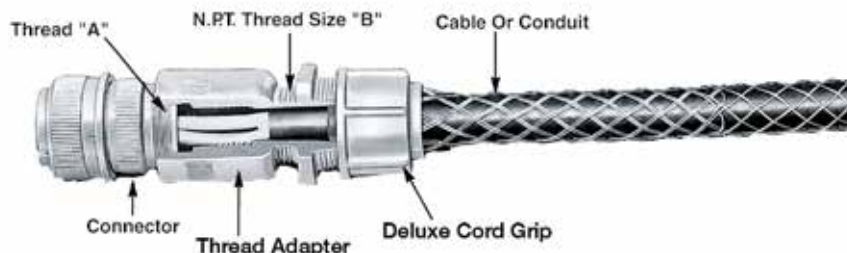

Dimensions in Inches (mm)



## Strain Relief for Liquidtight Conduit

Steel Fitting, Stainless Steel Mesh for Liquidtight Metal Conduit and PolyTuff® I Non-Metallic Conduit

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Benefits

- Helps prevent conduit pull-out and damage at the fitting
- Reduces equipment downtime

### Straight With Male Fitting



Conduit Trade Size Inches	NPT Fitting Size Inches	Mesh Length Inches (cm)	Catalog Number (Insulated)	Catalog Number (Non-insulated)
3/8	1/2	3" (7.62)	<b>074093511</b>	<b>074093401</b>
1/2	1/2	3.5" (8.89)	<b>074093512</b>	<b>074093402</b>
3/4	3/4	4" (10.16)	<b>074093513</b>	<b>074093403</b>
1	1	5" (12.70)	<b>074093514</b>	<b>074093404</b>
1 1/4	1 1/4	6" (15.24)	<b>074093515</b>	<b>074093405</b>
1 1/2	1 1/2	6.75" (17.14)	<b>074093516</b>	<b>074093406</b>
2	2	8" (20.32)	<b>074093518</b>	<b>074093408</b>
2 1/2	2 1/2	9.75" (24.76)	<b>074093520</b>	<b>074093410</b>
3	3	11" (27.94)	<b>074093522</b>	<b>074093412</b>
4	4	14" (35.56)	<b>074093526</b>	—

### 90° Angle With Male Fitting



Conduit Trade Size Inches	NPT Fitting Size Inches	Mesh Length Inches (cm)	Catalog Number (Insulated)	Catalog Number (Non-insulated)
3/8	1/2	3" (7.62)	<b>074093541</b>	<b>074093421</b>
1/2	1/2	3.5" (8.89)	<b>074093542</b>	<b>074093422</b>
3/4	3/4	4" (10.16)	<b>074093543</b>	<b>074093423</b>
1	1	5" (12.70)	<b>074093544</b>	<b>074093424</b>
1 1/4	1 1/4	6" (15.24)	<b>074093545</b>	<b>074093425</b>
1 1/2	1 1/2	6.75" (17.14)	<b>074093546</b>	<b>074093426</b>
2	2	8" (20.32)	<b>074093548</b>	<b>074093428</b>
2 1/2	2 1/2	9.75" (24.76)	<b>074093550</b>	—
3	3	11" (27.94)	<b>074093552</b>	—

Note: For use with Liquidtight Metal conduit and PolyTuff® I Non-Metallic conduit.

## Strain Relief for Liquidtight Conduit

Steel Fitting, Stainless Steel Mesh for Liquidtight Metal Conduit and PolyTuff® I Non-Metallic Conduit

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.

### Straight With Chase Fitting

Conduit Trade Size Inches	NPT Fitting Size Inches	Mesh Length Inches (cm)	Catalog Number
1/2	1/2	3.5" (8.89)	<b>07406079</b>
3/4	3/4	4" (10.16)	<b>07406080</b>
1	1	5" (12.70)	<b>07406081</b>
1 1/4	1 1/4	6" (15.24)	<b>07406082</b>
1 1/2	1 1/2	6.75" (17.14)	<b>07406083</b>



### 45° Angle With Male Fitting

Conduit Trade Size Inches	NPT Fitting Size Inches	Mesh Length Inches (cm)	Catalog Number (Insulated)	Catalog Number (Non-insulated)
3/8	1/2	3" (7.62)	<b>074093561</b>	<b>074093441</b>
1/2	1/2	3.5" (8.89)	<b>074093562</b>	<b>074093442</b>
3/4	3/4	4" (10.16)	<b>074093563</b>	<b>074093443</b>
1	1	5" (12.70)	<b>074093564</b>	<b>074093444</b>
1 1/4	1 1/4	6" (15.24)	<b>074093565</b>	<b>074093445</b>
1 1/2	1 1/2	6.75" (17.14)	<b>074093566</b>	<b>074093446</b>
2	2	8" (20.32)	<b>074093568</b>	<b>074093448</b>

Note: For use with Liquidtight Metal conduit and PolyTuff® I Non-Metallic conduit.



Dimensions in Inches (mm)



## Strain Relief for Liquidtight Conduit

Steel Fitting, Stainless Steel Mesh for UL Type A Liquidtight Conduit

### IMPORTANT

Read all breaking strength, safety and technical data relating to this product.



### Straight Male Hubbell Fitting

Conduit Trade Size Inches	NPT Fitting Size Inches	Mesh Length Inches (cm)	Catalog Number
3/8	1/2	3.75" (9.52)	<b>H038CNK</b>
1/2	1/2	4.5" (11.43)	<b>H050CNK</b>
3/4	3/4	6.25" (15.87)	<b>H075CNK</b>
1	1	7.5" (19.05)	<b>H100CNK</b>
1 1/4	1 1/4	9" (22.86)	<b>H125CNK</b>
1 1/2	1 1/2	13.5" (34.29)	<b>H150CNK</b>
2	2	14.5" (36.83)	<b>H200CNK</b>



### 90° Male Hubbell Fitting

Conduit Trade Size Inches	NPT Fitting Size Inches	Mesh Length Inches (cm)	Catalog Number
3/8	1/2	3.75" (9.52)	<b>H0389CNK</b>
1/2	1/2	4.5" (11.43)	<b>H0509CNK</b>
3/4	3/4	6.25" (15.87)	<b>H0759CNK</b>
1	1	7.5" (19.05)	<b>H1009CNK</b>
1 1/4	1 1/4	9" (22.86)	<b>H1259CNK</b>
1 1/2	1 1/2	13.5" (34.29)	<b>H1509CNK</b>
2	2	14.5" (36.83)	<b>H2009CNK</b>

Dimensions in Inches (mm)



## Wire Mesh Grip Materials

Material	Features	Product Group
Galvanized steel wire	<ul style="list-style-type: none"> <li>• High strength</li> <li>• Not subject to continuous outside environment</li> </ul>	<ul style="list-style-type: none"> <li>• Strain relief grips</li> <li>• I-Grips</li> </ul>
Stainless steel wire (302/304)	<ul style="list-style-type: none"> <li>• High strength</li> <li>• Corrosion resistant</li> <li>• Slightly magnetic</li> </ul>	<ul style="list-style-type: none"> <li>• Deluxe cord grips</li> <li>• Liquidtight, flexible, metal conduit grips</li> <li>• UL type A conduit grips</li> </ul>
Non-metallic strand	<ul style="list-style-type: none"> <li>• Superior flex life</li> <li>• Non-conductive</li> <li>• Corrosion resistant</li> <li>• Moderate strength</li> </ul>	<ul style="list-style-type: none"> <li>• Non-metallic deluxe cord grips</li> </ul>

## Operating Temperatures

Material	Temperature Range
Aluminum	-40°F to +300°F (-40°C to +149°C).
Aluminum Deluxe Cord Grips	-30°F to +240°F (-34°C to +115°C).
Non-Metallic Deluxe Cord Grips	-30°F to +225°F (-34°C to +107°C).
Nylon	-40°F to +225°F (-40°C to +107°C).
Nylon Fitting with Stainless Steel Mesh	-40°F to +225°F (-40°C to +107°C).
Stainless Steel	-60°F to +1000°F (-51°C to +537°C).
Stainless Steel Deluxe Cord Grips	-30°F to +240°F (-34°C to +115°C).
Neoprene (Bushings)	-30°F to +240°F (-34°C to +115°C).

## Hazardous Locations

	Product Categories
The product categories listed to the right are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2.	Deluxe cord grip, aluminum fitting; Deluxe cord grip, nylon fitting; Deluxe cord grip, non-metallic; Sealtite conduit grips; Dusttight strain relief grips.

## Flammability

Non-metallic deluxe cord grips will not support combustion. Listed below are the ratings.

Component	Rating
Mesh grip	UL 94HB.
Fitting	UL 94V-2.

## Approvals

UL Listing and CSA Certification are indicated on appropriate product catalog pages.

Agency	UL Control Number
Underwriters Laboratories Inc.	898D and 899D.
	UL Listed in accordance with Standard 514B for indoor/outdoor use.

## Wet Locations

	Product Categories
The products noted to the right are suitable for use in wet locations when a listed sealing ring is used between box and fitting.	Deluxe cord grip, aluminum fitting; Deluxe sealing ring cord grip; Deluxe cord grip, non-metallic; Sealtite conduit grips; Hubbell non-metallic conduit grips; Cord connectors; Hubbell Juniors; PolyTuff® connectors; Hubbell sealtite conduit connectors.



## Form Size Definition

The term "Form Size" refers to the physical mass or overall dimensions of a cord connector. Form 1 is the smallest size, Form 8 is the largest size.

## Knockout Holes

NPT Hub Size Inches	Knockout Hole Recommended Min. to Max. Inches (cm)		
¼	.540"	to	.570" (1.37-1.45)
⅜	.671"	to	.701" (1.70-1.78)
½	.859"	to	.906" (2.18-2.30)
¾	1.094"	to	1.141" (2.78-2.90)
1	1.359"	to	1.406" (3.45-3.57)
1¼	1.719"	to	1.766" (4.37-4.49)
1½	1.969"	to	2.016" (5.00-5.12)
2	2.453"	to	2.500" (6.23-6.35)
2½	2.953"	to	3.000" (7.50-7.62)
3	3.578"	to	3.625" (9.09-9.21)

## Product Data

### Deluxe Cord Grips, Liquidtight for Insulated Cables

Deluxe Cord Grips helps to alleviate pull tension on terminals, control cable arc-of-bend, prevent cord pull-out, and provide a liquidtight seal. They are offered with either aluminum, stainless steel or nylon fittings in a variety of configurations and NPT thread sizes. Additionally, a completely non-metallic product is offered on page V-53.

## Application

Deluxe Cord Grips are used indoors or outdoors to help prevent cord pull-out, and where cables are subjected to moisture, splash or submersion. Specific uses are: wiring enclosures, pendant stations, hand tools, construction, processing and material handling equipment, pumps, motors and machine tools.

## Benefits

- Helps to prevent cable pull-out
- Controls cable arc-of-bend
- Provides a liquidtight seal
- Corrosion resistant stainless steel mesh with aluminum collar




## Deluxe Cord Grips Fitting Dimensions

### Straight Hubbell Connectors

F NPT Inches	Aluminum, Inches (cm)						Nylon, Inches (cm)					Stainless Steel, Inches (cm)								
	A	B	C	D Throat Dia.	E		A	B	C	D Throat Dia.	E		A	B	C	D Throat Dia.	E			
	Form Dia.	Ref.			A/C*	A/F*	Dia.	Ref.			A/C*	A/F*	A/C*	A/F*	Ref.		A/C*	A/F*		
3/8-18	1	.88" (2.24)	.90" (2.29)	.46" (1.17)	.44" (1.12)	.99" (2.51)	.88" (2.24)	1.00" (2.54)	1.10" (2.79)	.43" (1.09)	.45" (1.14)	1.00" (2.54)	.93" (2.36)	1.01" (2.57)	.88" (2.24)	.90" (2.29)	.46" (1.17)	.45" (1.14)	.87" (2.21)	.75" (1.90)
1/2-14	1	.88" (2.24)	.90" (2.29)	.46" (1.17)	.44" (1.12)	.99" (2.51)	.88" (2.24)	1.00" (2.54)	1.10" (2.79)	.43" (1.09)	.45" (1.14)	1.00" (2.54)	.93" (2.36)	—	—	—	—	—	—	—
1/2-14	2	1.13" (2.87)	1.10" (2.79)	.55" (1.40)	.64" (1.63)	1.11" (2.82)	1.00" (2.54)	1.32" (3.35)	1.50" (3.81)	.53" (1.35)	.58" (1.47)	1.25" (3.17)	1.12" (2.84)	1.30" (3.30)	1.13" (2.87)	1.10" (2.79)	.54" (1.37)	.63" (1.60)	1.16" (2.95)	1.00" (2.54)
1/2-14	3	1.38" (3.51)	1.50" (3.81)	.55" (1.40)	.64" (1.63)	1.40" (3.56)	1.25" (3.17)	—	—	—	—	—	—	—	—	—	—	—	—	—
3/4-14	2	1.13" (2.87)	1.10" (2.79)	.55" (1.40)	.64" (1.63)	1.29" (3.28)	1.13" (2.87)	—	—	—	—	—	—	—	—	—	—	—	—	—
3/4-14	3	1.38" (3.51)	1.50" (3.81)	.55" (1.40)	.82" (2.08)	1.40" (3.56)	1.25" (3.17)	1.56" (3.96)	1.60" (4.06)	.55" (1.40)	.77" (1.96)	1.44" (3.66)	1.31" (3.33)	1.59" (4.04)	1.38" (3.51)	1.30" (3.30)	.56" (1.42)	.81" (2.06)	1.44" (3.66)	1.25" (3.17)
1-11 1/2	3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1-11 1/2	4	1.75" (4.44)	1.60" (4.06)	.71" (1.80)	1.02" (2.59)	1.81" (4.60)	1.62" (4.11)	1.88" (4.78)	1.75" (4.44)	.70" (1.78)	1.01" (2.57)	1.84" (4.67)	1.63" (4.14)	2.02" (5.13)	1.75" (4.44)	1.40" (3.56)	.70" (1.78)	1.03" (2.62)	1.88" (4.78)	1.63" (4.14)
1-11 1/2	5	2.31" (5.87)	1.70" (4.32)	.66" (1.68)	1.01" (2.57)	2.28" (5.79)	2.00" (5.08)	—	—	—	—	—	—	—	—	—	—	—	—	—
1 1/4-11 1/2	5	2.31" (5.87)	1.70" (4.32)	.74" (1.88)	1.26" (3.20)	2.28" (5.79)	2.12" (5.38)	—	—	—	—	—	—	—	—	—	—	—	—	—
1 1/2-11	5	2.31" (5.87)	1.70" (4.32)	.74" (1.88)	1.38" (3.51)	2.28" (5.79)	2.12" (5.38)	—	—	—	—	—	—	—	—	—	—	—	—	—
1 1/2-11 1/2	6	3.00" (7.62)	2.20" (5.59)	.75" (1.90)	1.50" (3.81)	2.97" (7.54)	2.75" (6.98)	—	—	—	—	—	—	—	—	—	—	—	—	—
2-11 1/2	6	3.00" (7.62)	2.20" (5.59)	.80" (2.03)	1.92" (4.88)	3.24" (8.24)	3.00" (7.62)	—	—	—	—	—	—	—	—	—	—	—	—	—
2-11 1/2	7	3.85" (9.78)	2.70" (6.86)	.88" (2.24)	1.94" (4.93)	4.05" (10.29)	3.75" (9.52)	—	—	—	—	—	—	—	—	—	—	—	—	—
2 1/2-8	7	3.85" (9.78)	2.70" (6.86)	1.30" (3.30)	2.32" (5.89)	4.34" (11.02)	4.02" (10.21)	—	—	—	—	—	—	—	—	—	—	—	—	—
2 1/2-8	8	4.75" (12.06)	2.70" (6.86)	1.25" (3.17)	2.38" (6.05)	4.86" (12.34)	4.50" (11.43)	—	—	—	—	—	—	—	—	—	—	—	—	—
3-8	7	3.85" (9.78)	2.70" (6.86)	1.30" (3.30)	2.54" (6.45)	4.34" (11.02)	4.01" (10.21)	—	—	—	—	—	—	—	—	—	—	—	—	—
3-8	8	4.50" (11.43)	2.70" (6.86)	1.38" (3.51)	3.00" (7.62)	4.86" (12.34)	4.50" (11.43)	—	—	—	—	—	—	—	—	—	—	—	—	—

Note: \*A/C— Across Corners; A/F—Across Flats.




Dimensions shown are approximate and are subject to change without notice.



## Deluxe Cord Grips Fitting Dimensions

### 45° Hubbell Connectors



Aluminum, Inches (cm)

F NPT Inches	Form	A Ref.	B Ref.	C	D Throat Dia.	E		G Dia.
						Across Corners	Across Flats	
½-14	2	2.00" (5.08)	1.90" (4.83)	.550" (1.40)	.560" (1.42)	1.270" (3.23)	1.110" (2.79)	1.125" (2.86)
¾-14	3	2.30" (5.84)	2.50" (6.53)	.560" (1.42)	.750" (1.90)	1.480" (3.76)	1.281" (3.25)	1.375" (3.49)
1-11½	4	2.60" (6.60)	2.80" (7.11)	.700" (1.78)	1.000" (2.54)	1.690" (4.29)	1.500" (3.81)	1.750" (4.44)
1¼-11½	5	3.90" (9.91)	3.90" (9.91)	.740" (1.88)	1.250" (3.17)	2.45" (6.22)	2.125" (5.40)	2.310" (5.87)
1½-11½	5	3.90" (9.91)	3.90" (9.91)	.740" (1.88)	1.500" (3.81)	2.45" (6.22)	2.125" (5.40)	2.310" (5.87)


### 90° Hubbell Connectors

Aluminum, Inches (cm)

Nylon, Inches (cm)

F NPT Inches	Form	A	B Ref.	C	D Throat Dia.	E			G	A	B Ref.	C	D Throat Dia.	E			G
						A/C*	A/F*	Dia.						A/C*	A/F*	Dia.	
¾-18	1	1.27" (3.23)	2.00" (5.08)	.460" (1.17)	.440" (1.12)	1.15" (2.92)	1.10" (2.79)	.875" (2.22)	—	—	—	—	—	—	—	—	—
½-14	2	1.56" (3.96)	2.30" (5.84)	.500" (1.27)	.546" (1.39)	1.30" (3.30)	1.13" (2.87)	1.125" (2.86)	1.41" (3.58)	2.50" (6.35)	.550" (1.40)	.575" (1.46)	1.23" (3.12)	1.12" (2.82)	1.315" (3.34)		
¾-14	3	1.79" (4.55)	2.80" (7.11)	.560" (1.42)	.765" (1.94)	1.49" (3.78)	1.31" (3.33)	1.375" (3.49)	1.65" (4.19)	2.81" (7.14)	.560" (1.42)	.765" (1.94)	1.42" (3.61)	1.29" (3.28)	1.560" (3.96)		
1-11½	4	2.08" (5.28)	3.20" (8.13)	.700" (1.78)	1.000" (2.54)	1.70" (4.32)	1.50" (3.81)	1.750" (4.44)	1.99" (5.05)	3.30" (8.38)	.700" (1.78)	1.010" (2.57)	1.82" (4.62)	1.60" (4.06)	1.875" (4.76)		
1¼-11½	5	3.18" (8.08)	4.30" (10.92)	.730" (1.85)	1.260" (3.20)	2.47" (6.27)	2.15" (5.46)	2.310" (5.87)	—	—	—	—	—	—	—		
1½-11½	5	3.18" (8.08)	4.30" (10.92)	.750" (1.92)	1.500" (3.81)	2.47" (6.27)	2.15" (5.46)	2.310" (5.87)	—	—	—	—	—	—	—		
2-11½	6	3.51" (8.92)	5.50" (13.97)	.800" (2.03)	1.920" (4.88)	2.98" (7.57)	2.78" (7.06)	3.000" (7.62)	—	—	—	—	—	—	—		

Note: \*A/C - Across Corners; A/F - Across Flats.

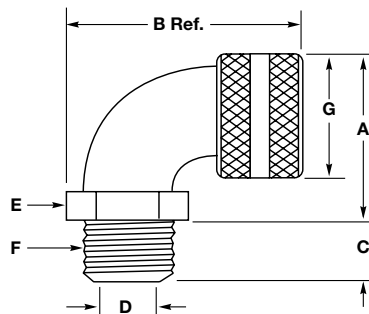

Dimensions shown are approximate and are subject to change without notice.






## Deluxe Cord Grips Fitting Dimensions

### Female Hubbell Connectors

Aluminum, Inches (cm)							
F NPT Inches	Form	A Dia.	B Ref.	C	D Throat Dia.	E	
						Across Corners	Across Flats
¾-18	1	.88" (2.24)	1.40" (3.56)	.560" (1.42)	.44" (1.12)	.94" (2.39)	.81" (2.06)
½-14	2	1.13" (2.87)	1.80" (4.57)	.560" (1.42)	.63" (1.60)	1.15" (2.92)	1.00" (2.54)
¾-14	2	1.13" (2.87)	2.10" (5.33)	.750" (1.90)	.63" (1.60)	1.44" (3.66)	1.25" (3.17)
1-11½	4	1.75" (4.44)	2.30" (5.84)	.880" (2.24)	1.10" (2.79)	1.88" (4.78)	1.63" (4.14)
1¼-11½	5	2.31" (5.87)	2.80" (7.11)	.950" (2.41)	1.43" (3.63)	2.64" (6.71)	2.29" (5.82)
1½-11½	5	2.31" (5.87)	2.80" (7.11)	.950" (2.41)	1.43" (3.63)	2.64" (6.71)	2.29" (5.82)

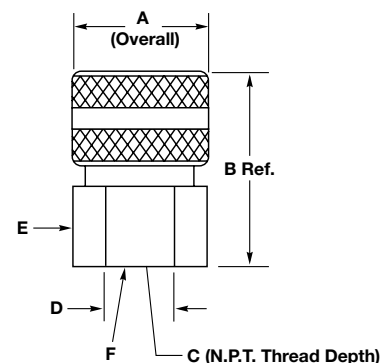

### Product Data

#### Dust-Tight Strain Relief Grips for Insulated Cables

Kellems® Strain Relief Grips connect flexible cord or bus drop cable to electrical enclosures. For indoor use only, they are available with either insulated or non-insulated aluminum fittings, and feature single weave, galvanized steel mesh grips with patented wide range mesh construction. They come with a locknut and a neoprene gasket that provides a dust tight seal.

#### Application

Used to connect electrical cable to power boxes, cabinets, panel boards, power centers, machine tools and with bus drop systems.

#### Benefits

- Helps prevent cord or cable pull-out
- Provides a dust tight seal
- Easy installation
- Patented mesh construction
- One piece design

*Dimensions shown are approximate and are subject to change without notice.*



## Strain Relief Grips for Liquidtight Flexible Metal and PolyTuff® I Non-Metallic Conduit

Kellems Liquidtight, Flexible Metal Conduit Grips are offered with high quality Hubbell plated steel fittings in a wide variety of NPT sizes and configurations, either insulated or non-insulated. The addition of a stainless steel mesh to these fittings makes them stronger than the conduit itself. Kellems Conduit Grips helps prevent conduit pull-out from the connecting fitting that is subject to stress, pull tension, vibration, motion or strain. They promote safe electrical systems and reduce equipment downtime.


### Application

Kellems Conduit Grips are used in the wiring of machine tools, motors, molding equipment, transformers, weaving and paper machines, fans, lighting, bakeries, breweries, food processing, chemical plants, dairies, mines and any application that requires Liquidtight Conduit.

### Benefits

- Helps prevent conduit pull-out and damage at the fitting
- Reduces equipment downtime
- Liquidtight fittings
- Easily installed
- Stainless steel grip resists corrosion

Kellems Conduit Grips are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 of the National Electric Code.

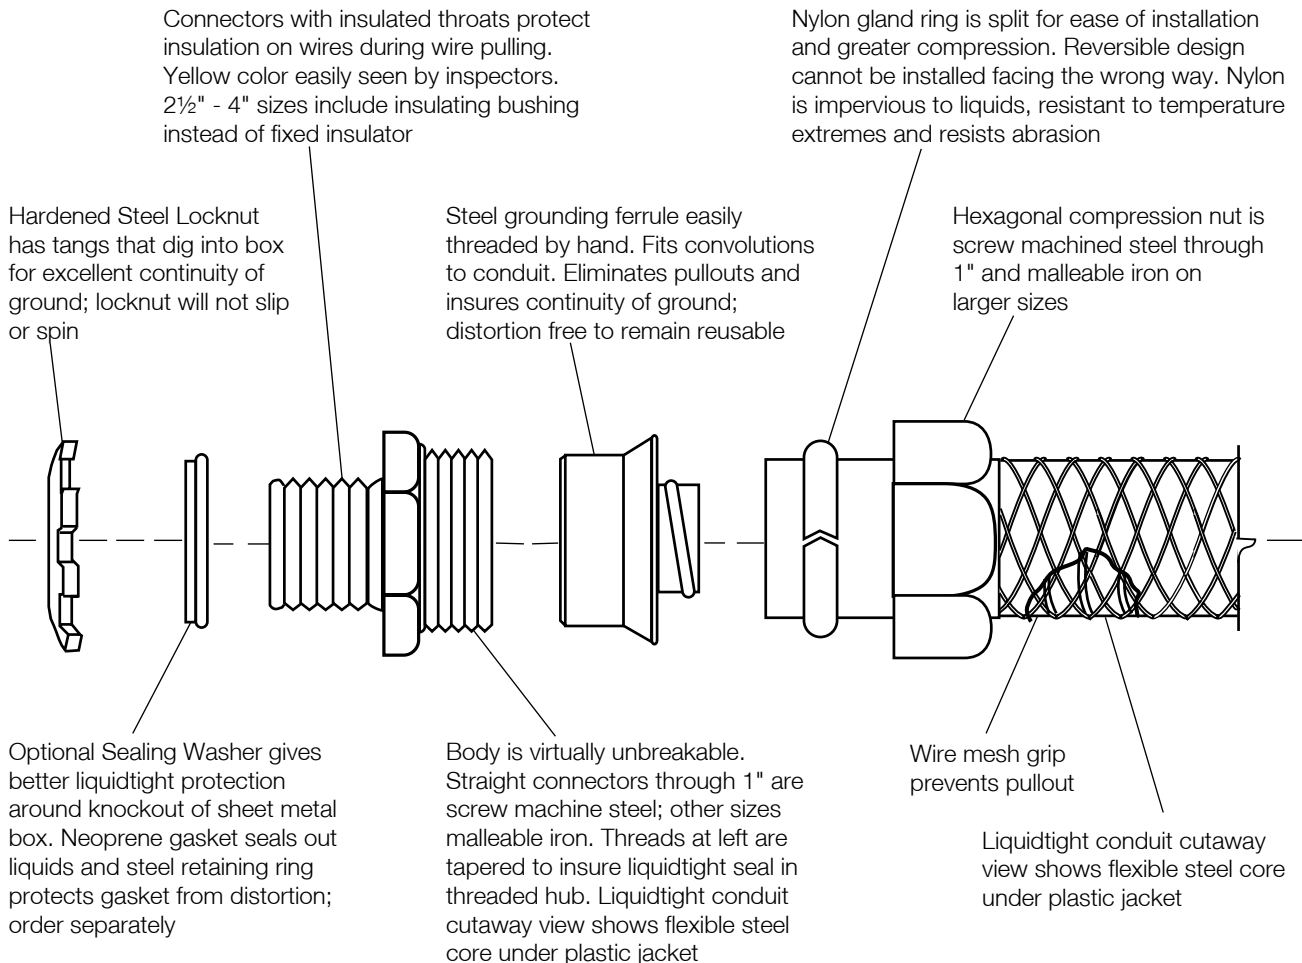



## Liquidtight Conduit Grip Fitting Dimensions, Inches

### Straight with Male Fitting

Dimensions, Inches								
Trade Size	A	B	C		D	E		Catalog Number
Inches	Ref.	Ref.	A/C*	A/F*	Throat Dia.	A/C*	A/F*	
3/8	1.43"	.59"	1.20"	1.06"	.61"	1.07"	.93"	<b>074093401</b>
1/2	1.43"	.59"	1.34"	1.19"	.61"	1.22"	1.06"	<b>074093402</b>
3/4	1.56"	.59"	1.55"	1.37"	.84"	1.43"	1.25"	<b>074093403</b>
1	1.68"	.66"	1.95"	1.69"	1.06"	1.73"	1.56"	<b>074093404</b>
1 1/4	2.03"	.63"	2.39"	2.06"	1.37"	2.36"	2.08"	<b>074093405</b>
1 1/2	2.21"	.63"	2.72"	2.38"	1.53"	2.79"	2.48"	<b>074093406</b>
2	2.28"	.69"	3.08"	2.87"	2.06"	3.32"	2.90"	<b>074093408</b>

### Straight with Male Fitting with Insulated Throat

Dimensions, Inches								
Trade Size	A	B	C		D	E		Catalog Number
Inches	Ref.	Ref.	A/C*	A/F*	Throat Dia.	A/C*	A/F*	
3/8	1.50"	.66"	1.20"	1.06"	.57"	1.07"	.93"	<b>074093511</b>
1/2	1.50"	.66"	1.34"	1.19"	.57"	1.22"	1.06"	<b>074093512</b>
3/4	1.62"	.66"	1.55"	1.38"	.78"	1.43"	1.25"	<b>074093513</b>
1	1.75"	.72"	1.95"	1.69"	.98"	1.73"	1.56"	<b>074093514</b>
1 1/4	2.09"	.69"	2.39"	2.06"	1.29"	2.36"	2.08"	<b>074093515</b>
1 1/2	2.28"	.69"	2.72"	2.37"	1.53"	2.79"	2.48"	<b>074093516</b>
2	2.34"	.75"	3.08"	2.87"	1.95"	3.32"	2.90"	<b>074093518</b>
2 1/2	3.56"	1.06"	3.92"	3.62"	2.42"	3.85"	3.60"	<b>074093520</b>
3	3.81"	1.06"	4.70"	4.31"	3.01"	4.65"	4.33"	<b>074093522</b>
4	3.81"	1.06"	5.75"	5.31"	3.96"	5.75"	5.39"	<b>074093526</b>

### 45° Angle with Male Fitting

Dimensions, Inches									
Trade Size	H	J	K	L		M	N		Catalog Number
Inches	Ref.	Ref.	Ref.	A/C*	A/F*	Throat Dia.	A/C*	A/F*	
3/8	1.19"	1.28"	.59"	1.20"	1.06"	.60"	1.16"	1.02"	<b>074093441</b>
1/2	1.19"	1.28"	.59"	1.34"	1.19"	.61"	1.21"	1.06"	<b>074093442</b>
3/4	1.19"	1.43"	.59"	1.55"	1.45"	.84"	1.50"	1.32"	<b>074093443</b>
1	1.38"	1.53"	.66"	1.95"	1.69"	1.05"	1.82"	1.59"	<b>074093444</b>
1 1/4	1.42"	1.69"	.63"	2.39"	2.06"	1.37"	2.32"	2.03"	<b>074093445</b>
1 1/2	1.66"	2.00"	.66"	2.72"	2.38"	1.60"	2.62"	2.29"	<b>074093446</b>
2	1.69"	2.25"	.66"	3.08"	2.88"	2.05"	3.21"	2.80"	<b>074093448</b>

### 45° Angle with Male Fitting with Insulated Throat




Dimensions, Inches									
Trade Size	H	J	K	L		M	N		Catalog Number
Inches	Ref.	Ref.	Ref.	A/C*	A/F*	Throat Dia.	A/C*	A/F*	
3/8	1.25"	1.28"	.66"	1.20"	1.06"	.57"	1.16"	1.02"	<b>074093561</b>
1/2	1.25"	1.28"	.66"	1.34"	1.19"	.57"	1.21"	1.06"	<b>074093562</b>
3/4	1.25"	1.44"	.66"	1.55"	1.45"	.78"	1.50"	1.32"	<b>074093563</b>
1	1.44"	1.53"	.72"	1.95"	1.69"	.98"	1.82"	1.59"	<b>074093564</b>
1 1/4	1.48"	1.69"	.69"	2.39"	2.06"	1.29"	2.32"	2.03"	<b>074093565</b>
1 1/2	1.72"	2.00"	.72"	2.72"	2.38"	1.53"	2.62"	2.29"	<b>074093566</b>
2	1.75"	2.25"	.72"	3.08"	2.87"	1.95"	3.21"	2.80"	<b>074093568</b>

### 90° Angle with Male Fitting

Dimensions, Inches									
Trade Size	D	E	F		G	P		Catalog Number	
Inches	Ref.	Ref.	A/C*	A/F*	Ref.	Throat Dia.	A/C*		A/F*
3/8	1.31"	.59"	1.20"	1.06"	1.44"	.60"	1.13"	.99"	<b>074093421</b>
1/2	1.31"	.59"	1.34"	1.12"	1.44"	.61"	1.21"	1.00"	<b>074093422</b>
3/4	1.44"	.59"	1.55"	1.45"	1.63"	.83"	1.48"	1.29"	<b>074093423</b>
1	1.78"	.66"	1.95"	1.60"	2.19"	1.05"	1.80"	1.57"	<b>074093424</b>
1 1/4	1.97"	.63"	2.39"	2.06"	2.50"	1.37"	2.32"	2.02"	<b>074093425</b>
1 1/2	2.19"	.66"	2.72"	2.38"	2.69"	1.61"	2.58"	2.25"	<b>074093426</b>
2	2.53"	.66"	3.08"	2.87"	3.25"	2.05"	3.14"	2.75"	<b>074093428</b>

### 90° Angle with Male Fitting with Insulated Throat

Dimensions, Inches									
Trade Size	D	E	F		G	P		Catalog Number	
Inches	Ref.	Ref.	A/C*	A/F*	Ref.	Throat Dia.	A/C*		A/F*
3/8	1.38"	.66"	1.20"	1.06"	1.44"	.60"	1.13"	.99"	<b>074093541</b>
1/2	1.38"	.66"	1.34"	1.12"	1.44"	.57"	1.21"	1.00"	<b>074093542</b>
3/4	1.50"	.66"	1.55"	1.45"	1.63"	.78"	1.48"	1.29"	<b>074093543</b>
1	1.84"	.66"	1.95"	1.60"	2.19"	.98"	1.80"	1.57"	<b>074093544</b>
1 1/4	2.03"	.69"	2.39"	2.06"	2.50"	1.29"	2.32"	2.02"	<b>074093545</b>
1 1/2	2.25"	.69"	2.72"	2.38"	2.69"	1.53"	2.58"	2.20"	<b>074093546</b>
2	2.59"	.72"	3.08"	2.87"	3.25"	1.95"	3.14"	2.75"	<b>074093548</b>
2 1/2	3.44"	1.00"	3.92"	3.63"	4.25"	2.42"	3.78"	3.50"	<b>074093550</b>
3	3.75"	1.00"	4.70"	4.31"	4.87"	3.01"	4.64"	4.30"	<b>074093552</b>



Note: \*A/C - Across Corners; A/F - Across Flats.

Dimensions shown are approximate and are subject to change without notice.



## Strain Relief for UL Type A, Flexible, Liquidtight Conduit

Kellems Grips for UL Type A, non-metallic, flexible, liquidtight conduit are available in straight and 90° male and feature a high quality Hubbell plated steel or malleable iron fitting, complete with a sealing O-ring, lock nut and stainless steel mesh. These grips increase the retention of the conduit in the fitting, control its arc-of-bend and provide a liquidtight seal.

### Application


These grips are used on UL Type A non-metallic conduit connections at limit switches, motor boxes, panel boards, control stations and on all types of machinery and machine tools.

Steel Locknut has tangs that dig into box for excellent continuity of ground; locknut will not slip or spin

### Benefits


- Provides a liquidtight seal.
- Helps prevent conduit pull-out.
- Reduces conduit cutting, kinking, fraying and splitting at the fitting.
- Easily installed.

Body is virtually unbreakable. Straight connectors through 1" are screw machine steel; other sizes are malleable iron. Threads are tapered to insure liquidtight seal when used in threaded hub; octagonal shape inside holds the ferrule to prevent conduit from twisting during installation

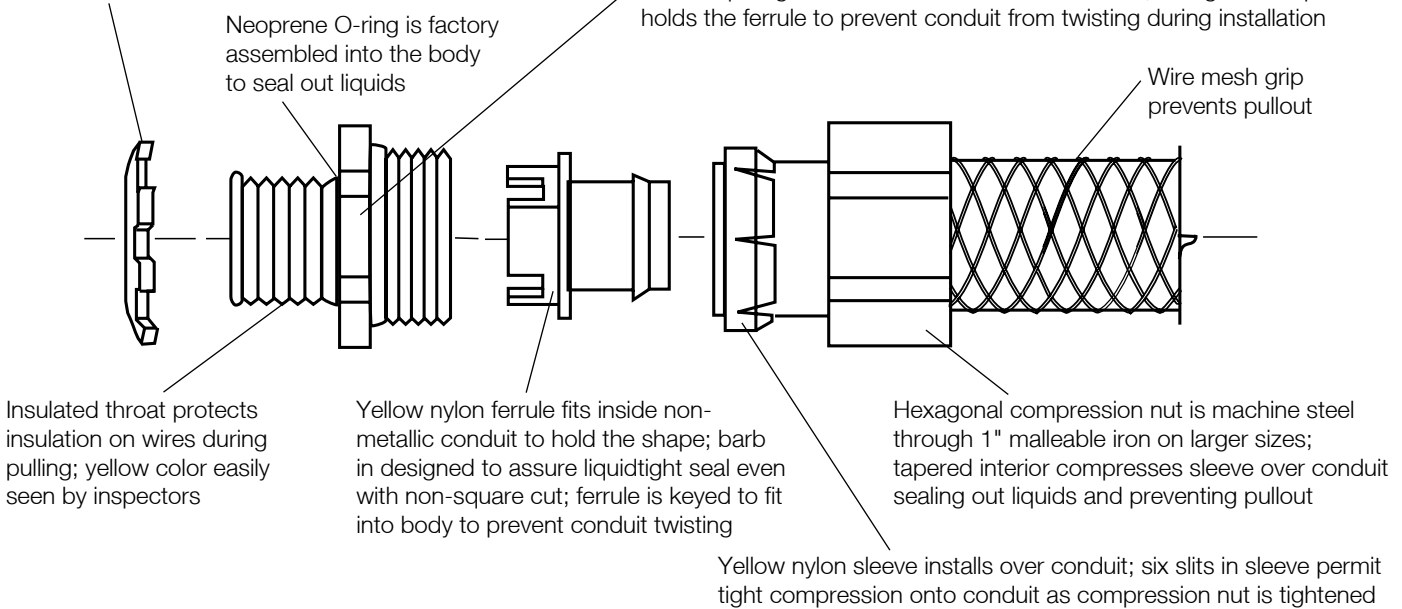

### Dimensional Charts For UL Type A, Liquidtight Conduit Grip Fittings


#### Straight with Male Fitting with Insulated Throat



Dimensions Inches (cm)

Trade Size NPT Inches	A	B	C	D	Catalog Number
3/8	1.922" (4.88)	.594" (1.51)	1.156" (2.94)	3.75" (9.52)	<b>H038CNK</b>
1/2	1.922" (4.88)	.594" (1.51)	1.250" (3.17)	4.50" (11.43)	<b>H050CNK</b>
3/4	2.016" (5.12)	.594" (1.51)	1.500" (3.81)	6.25" (15.87)	<b>H075CNK</b>
1	2.157" (5.48)	.719" (1.83)	1.844" (4.68)	7.50" (19.05)	<b>H100CNK</b>
1 1/4	2.219" (5.64)	.750" (1.91)	2.312" (5.87)	9.00" (22.86)	<b>H125CNK</b>
1 1/2	2.344" (5.95)	.750" (1.91)	2.578" (6.55)	13.50" (34.29)	<b>H150CNK</b>
2	2.406" (6.11)	.750" (1.91)	3.187" (8.09)	14.50" (36.83)	<b>H200CNK</b>

#### 90° Angle with Male Fitting with Insulated Throat

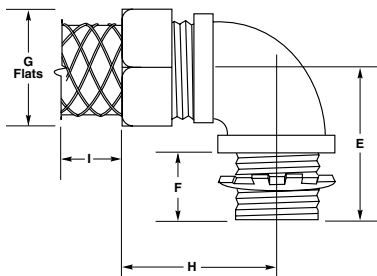

Dimensions Inches (cm)

Trade Size NPT Inches	E	F	G	H	I	Catalog Number
3/8	1.250" (3.18)	.594" (1.51)	1.156" (2.94)	1.453" (3.69)	3.75" (9.52)	<b>H0389CNK</b>
1/2	1.281" (3.25)	.594" (1.51)	1.250" (3.17)	1.453" (3.69)	4.50" (11.43)	<b>H0509CNK</b>
3/4	1.438" (3.65)	.594" (1.51)	1.500" (3.81)	1.000" (2.54)	6.25" (15.87)	<b>H0759CNK</b>
1	1.750" (4.44)	.719" (1.83)	1.844" (4.68)	2.125" (5.40)	7.50" (19.05)	<b>H1009CNK</b>
1 1/4	1.969" (5.00)	.750" (1.91)	2.312" (5.87)	2.344" (5.95)	9.00" (22.86)	<b>H1259CNK</b>
1 1/2	2.250" (5.71)	.750" (1.91)	2.578" (6.55)	2.500" (6.35)	13.50" (34.29)	<b>H1509CNK</b>
2	2.531" (6.43)	.750" (1.91)	3.187" (8.09)	2.781" (7.06)	14.50" (36.83)	<b>H2009CNK</b>



## Features and Benefits

### Cord Connectors


Hubbell has the broadest line and the widest choice of materials in the industry. NPT hub sizes from 1/4" to 3" in straight male end, 90°, 45°, female and underground feed connectors. They are available in your choice of aluminum, plated steel, nylon and stainless steel.

The zinc-plated steel cord connectors offers the strength of steel and the corrosion resistance of zinc-plating. These heavy-duty connectors hold up to most manufacturing chemicals including acid solutions, solvents and other corrosive materials.

Their machined steel nut and body allows for tightening the compression nut and NPT hub without worrying about stripping the threads. For larger size cord, NPT hub sizes 1" to 2", Hubbell utilizes malleable iron connectors which provide excellent holding and liquidtight performance.

Hubbell's nylon cord connectors resist most common industrial corrosives and provide highly effective pullout protection in a lightweight design. They are ideal for any application where weight, conductivity or corrosion may be an issue. They're available in NPT hub sizes from 1/4" to 1".

Stainless steel cord connectors provide superior strength and corrosion resistance for industrial and military applications. They are machined from 300 series stainless steel and come in 1/4" to 1", NPT hub sizes.

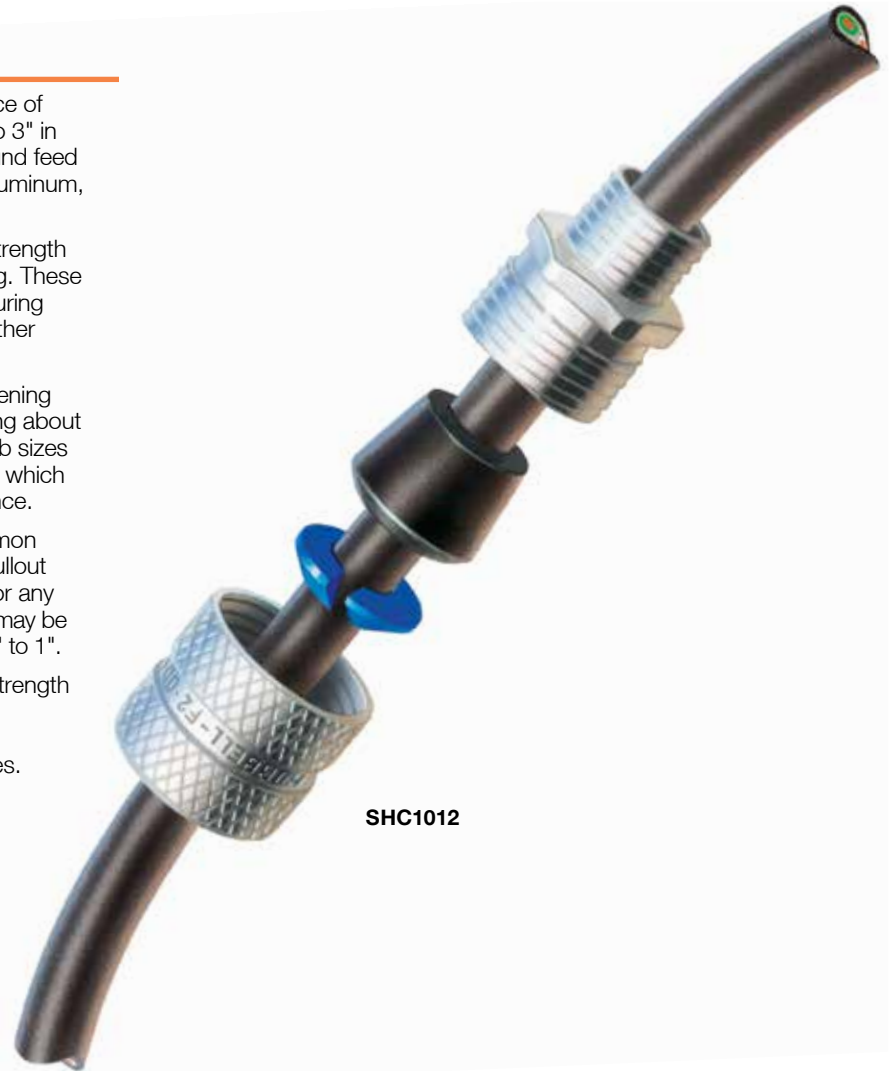

SHC1012



#### Liquidtight Seal

- Lubricated neoprene bushing compresses easily for a liquidtight seal and added pull-out protection
- The connector body is a one-piece design with machined threads; a tapered interior seats the bushing evenly for a liquidtight seal



#### Connector Body

- Machined threads provide a strong positive seal; the tapered interior dome easily drives the bushing into the connector body



#### Connector Identification

- The patented GOTCHA® ring incorporates a split hinge design to prevent friction and provide strain relief, also color-coded for sizing identification



#### Comprehensive Offering

- Hubbell offers a full line of machined aluminum cord connectors in NPT hub sizes 1/4" through 1" and cast aluminum 1" to 3"
- They provide durable performance and a clean attractive look without adding unwanted weight; NPT hub sizes 1/4" to 1" feature an attractive knurled finish which makes them easy to handle

## Straight Male Cord Connectors

**IP66\***  
SUITABILITY

Form Size 1-3



### Straight Male

NPT Hub Size	Cord Dia. Inches (mm)	Form Size	Color Code	Machined Aluminum	Machined Zinc-Plated Steel	Stainless Steel	Nylon Gray	Nylon Black
1/4	.06"-.13" (1.6-3.2)	F1	Green	—	—	—	<b>SHC1001CR</b>	—
	.13"-.19" (3.2-4.7)		Orange	<b>SHC1002</b>	—	—	<b>SHC1002CR</b>	—
	.19"-.25" (4.7-6.3)		Red	<b>SHC1003</b>	—	<b>SHC1003SS</b>	<b>SHC1003CR</b>	—
	.25"-.31" (6.3-7.9)		Black	<b>SHC1004</b>	—	<b>SHC1004SS</b>	<b>SHC1004CR</b>	—
	.31"-.38" (7.9-9.5)		White	<b>SHC1005**</b>	—	—	<b>SHC1005CR</b>	<b>SHC2005CR</b>
	.38"-.44" (9.5-11)		Blue	—	—	—	<b>SHC1006CR</b>	—
3/8	.06"-.13" (1.6-3.2)	F1	Green	<b>SHC1007</b>	—	—	—	—
	.13"-.19" (3.2-4.7)		Orange	<b>SHC1008</b>	<b>SHC1008ZP</b>	—	<b>SHC1008CR</b>	<b>SHC2008CR</b>
	.19"-.25" (4.7-6.3)		Red	<b>SHC1009</b>	—	<b>SHC1009SS</b>	<b>SHC1009CR</b>	—
	.25"-.31" (6.3-7.9)		Black	<b>SHC1010</b>	<b>SHC1010ZP</b>	—	<b>SHC1010CR</b>	<b>SHC2010CR</b>
	.31"-.38" (7.9-9.5)		White	<b>SHC1011</b>	—	<b>SHC1011SS</b>	<b>SHC1011CR</b>	<b>SHC2011CR</b>
	.38"-.44" (9.5-11.0)		Blue	<b>SHC1012</b>	<b>SHC1012ZP</b>	<b>SHC1012SS</b>	<b>SHC1012CR</b>	<b>SHC2012CR</b>
1/2	.19"-.25" (4.7-6.3)	F1	Red	<b>SHC1015</b>	—	—	—	—
	.25"-.31" (6.3-7.9)		Black	<b>SHC1016</b>	—	—	—	—
	.31"-.38" (7.9-9.5)		White	<b>SHC1017</b>	—	—	—	—
	.38"-.44" (9.5-11.0)		Blue	<b>SHC1018</b>	—	—	—	—
1/2	.06"-.13" (1.6-3.2)	F2	Green	<b>SHC1019</b>	—	—	<b>SHC1019CR</b>	—
	.13"-.19" (3.2-4.7)		Orange	<b>SHC1020</b>	<b>SHC1020ZP</b>	<b>SHC1020SS</b>	<b>SHC1020CR</b>	—
	.19"-.25" (4.7-6.3)		Red	<b>SHC1021</b>	<b>SHC1021ZP</b>	<b>SHC1021SS</b>	<b>SHC1021CR</b>	<b>SHC2021CR</b>
	.25"-.38" (6.3-9.7)		White	<b>SHC1022</b>	<b>SHC1022ZP</b>	<b>SHC1022SS</b>	<b>SHC1022CR</b>	<b>SHC2022CR</b>
	.38"-.50" (9.7-12.7)		Blue	<b>SHC1023</b>	<b>SHC1023ZP</b>	<b>SHC1023SS</b>	<b>SHC1023CR</b>	<b>SHC2023CR</b>
	.50"-.63" (12.7-15.9)		Brown	<b>SHC1024</b>	<b>SHC1024ZP</b>	<b>SHC1024SS</b>	<b>SHC1024CR**</b>	<b>SHC2024CR**</b>
1/2	.38"-.50" (9.7-12.7)	F3	Blue	<b>SHC1025</b>	—	—	—	—
	.50"-.63" (12.7-15.9)		Brown	<b>SHC1026</b>	—	—	—	—
	.63"-.75" (15.9-19.0)		Yellow	<b>SHC1027**</b>	<b>SHC1027ZP**</b>	—	—	—
	.75"-.88" (19.0-22.2)		Orchid	<b>SHC1028**</b>	<b>SHC1028ZP**</b>	—	—	—
3/4	.06"-.13" (1.6-3.2)	F2	Green	<b>SHC1029</b>	—	—	—	—
	.13"-.19" (3.2-4.7)		Orange	<b>SHC1030</b>	<b>SHC1030ZP</b>	—	—	—
	.19"-.25" (4.7-6.3)		Red	<b>SHC1031</b>	<b>SHC1031ZP</b>	—	—	—
	.25"-.38" (6.3-9.7)		White	<b>SHC1032</b>	<b>SHC1032ZP</b>	—	—	—
	.38"-.50" (9.7-12.7)		Blue	<b>SHC1033</b>	<b>SHC1033ZP</b>	—	—	—
	.50"-.63" (12.7-15.9)		Brown	<b>SHC1034</b>	<b>SHC1034ZP</b>	—	—	—
3/4	.38"-.50" (9.5-12.7)	F3	Blue	—	<b>SHC1035ZP</b>	<b>SHC1035SS</b>	<b>SHC1035CR</b>	<b>SHC2035CR</b>
	.50"-.63" (12.7-15.9)		Brown	<b>SHC1036</b>	—	<b>SHC1036SS</b>	<b>SHC1036CR</b>	<b>SHC2036CR</b>
	.63"-.75" (15.9-19.0)		Yellow	<b>SHC1037</b>	<b>SHC1037ZP</b>	<b>SHC1037SS</b>	<b>SHC1037CR</b>	<b>SHC2037CR</b>
	.75"-.88" (19.0-22.2)		Orchid	<b>SHC1038**</b>	<b>SHC1038ZP**</b>	<b>SHC1038SS**</b>	<b>SHC1038CR**</b>	<b>SHC2038CR**</b>
1	.50"-.63" (12.7-15.9)	F3	Brown	—	<b>SHC1097ZP</b>	—	—	—
	.63"-.75" (15.9-19.0)		Yellow	—	<b>SHC1098ZP</b>	—	—	—
	.75"-.88" (19.0-22.2)		Orchid	—	<b>SHC1099ZP</b>	—	—	—
1	.38"-.50" (9.7-12.7)	F4	Blue	<b>SHC1039</b>	—	<b>SHC1039SS</b>	<b>SHC1039CR</b>	—
	.50"-.63" (12.7-15.9)		Brown	<b>SHC1040</b>	—	—	<b>SHC1040CR</b>	<b>SHC2040CR</b>
	.63"-.75" (15.9-19.0)		Yellow	<b>SHC1041</b>	—	<b>SHC1041SS</b>	<b>SHC1041CR</b>	<b>SHC2041CR</b>
	.75"-.88" (19.0-22.2)		Orchid	<b>SHC1042</b>	—	<b>SHC1042SS</b>	<b>SHC1042CR</b>	<b>SHC2042CR</b>
	.88"-1.00" (22.2-25.4)		Gray	<b>SHC1043</b>	<b>SHC1043ZP</b>	<b>SHC1043SS</b>	<b>SHC1043CR</b>	<b>SHC2043CR</b>
	1.00"-1.13" (25.4-28.6)		Pink	<b>SHC1044**</b>	—	<b>SHC1044SS**</b>	<b>SHC1044CR**</b>	<b>SHC2044CR**</b>

Note: See pages V-78 to V-88 for technical information and dimensional drawings.

\*IP66 Suitability when used with optional metal clad O-ring, see page V-75 for additional information.

\*\*Cable jacket may have to be stripped to pass through connector body.

Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum.

Locknuts sold separately. See page V-75 for additional information.



## Straight Male Cord Connectors

**IP66\***  
SUITABILITY

Form Size 5-8



### Straight Male

NPT Hub Size	Cord Diameter Inches (mm)	Form Size	Cast Aluminum	Malleable Iron
1	.88"-1.00" (22.2-25.4)	F5	<b>SHC1046</b>	—
	1.00"-1.13" (25.4-28.6)		<b>SHC1047**</b>	—
	1.13"-1.25" (28.6-31.7)		<b>SHC1048**</b>	—
	1.25"-1.38" (31.7-34.9)		<b>SHC1049**</b>	—
1¼	.75"-.88" (19.0-22.2)	F5	<b>SHC1050</b>	—
	.88"-1.00" (22.2-25.4)		<b>SHC1051</b>	—
	1.00"-1.13" (25.4-28.6)		<b>SHC1052</b>	<b>SHC1052ZP</b>
	1.13"-1.25" (28.6-31.7)		<b>SHC1053</b>	<b>SHC1053ZP</b>
1½	1.25"-1.38" (31.7-34.9)	F5	<b>SHC1054**</b>	<b>SHC1054ZP</b>
	.75"-.88" (19.0-22.2)		<b>SHC1055</b>	—
	.88"-1.00" (22.2-25.4)		<b>SHC1056</b>	—
	1.00"-1.13" (25.4-28.6)		<b>SHC1057</b>	<b>SHC1057ZP</b>
1½	1.13"-1.25" (28.6-31.7)	F5	<b>SHC1058</b>	<b>SHC1058ZP</b>
	1.25"-1.38" (31.7-34.9)		<b>SHC1059</b>	<b>SHC1059ZP</b>
	1.38"-1.50" (34.9-38.1)		<b>SHC1061</b>	—
	1.50"-1.63" (38.1-41.3)		<b>SHC1062**</b>	—
2	1.63"-1.75" (41.3-44.4)	F6	<b>SHC1063**</b>	—
	1.75"-1.88" (44.4-47.6)		<b>SHC1064**</b>	—
	1.25"-1.38" (31.7-34.9)		<b>SHC1065</b>	—
	1.38"-1.50" (34.9-38.1)		<b>SHC1066</b>	—
2	1.50"-1.63" (38.1-41.3)	F6	<b>SHC1067</b>	—
	1.63"-1.75" (41.3-44.4)		<b>SHC1068</b>	—
	1.75"-1.88" (44.4-47.6)		<b>SHC1069</b>	—
	1.69"-1.81" (42.9-46.0)		<b>SHC1070</b>	—
2	1.81"-1.94" (46.0-49.2)	F7	<b>SHC1071</b>	—
	1.94"-2.06" (49.2-52.4)		<b>SHC1072**</b>	—
	2.06"-2.19" (52.4-55.6)		<b>SHC1073**</b>	—
	2.19"-2.31" (55.6-58.7)		<b>SHC1074**</b>	—
2½	1.69"-1.81" (42.9-46.0)	F7	<b>SHC1076</b>	—
	1.81"-1.94" (46.0-49.2)		<b>SHC1077</b>	—
	1.94"-2.06" (49.2-52.4)		<b>SHC1078</b>	—
	2.06"-2.19" (52.4-55.6)		<b>SHC1079</b>	—
3	2.19"-2.31" (55.6-58.7)	F7	<b>SHC1080</b>	—
	2.31"-2.44" (58.7-61.9)		<b>SHC1081**</b>	—
	1.69"-1.81" (42.9-46.0)		<b>SHC1086</b>	—
	1.94"-2.06" (49.2-52.4)		<b>SHC1088</b>	—
3	2.06"-2.19" (52.4-55.6)	F7	<b>SHC1089</b>	—
	2.19"-2.31" (55.6-58.7)		<b>SHC1090</b>	—
	2.31"-2.44" (58.7-61.9)		<b>SHC1091</b>	—
	2.44"-2.63" (61.9-66.7)		<b>SHC1092</b>	—
3	2.63"-2.81" (66.7-71.4)	F8	<b>SHC1093</b>	—
	2.81"-3.00" (71.4-76.2)		<b>SHC1094</b>	—
	3.00"-3.25" (76.2-82.5)		<b>SHC1095**</b>	—

Note: See pages V-78 to V-88 for technical information and dimensional drawings.

\*IP66 Suitability when used with optional metal clad O-ring, see page V-75 for additional information.

\*\*Cable jacket may have to be stripped to pass through connector body.

Locknuts sold separately. See page V-75 for additional information.



UL Listed to  
Type 4, 4X, 12 and 13

## 45° and 90° Male Cord Connectors

**IP66\***  
SUITABILITY

Form Size 1-6



### 90° Male

NPT Hub Size	Cord Diameter Inches (mm)	Form Size	Color Code	Machined Aluminum†	Machined Zinc-Plated SteelΔ	Cast Aluminum	Nylon Gray	Nylon Black
3/8	.25"-.31" (6.3-7.9)	F1	Black	<b>NHC1010</b>	—	—	—	—
	.31"-.38" (7.9-9.5)		White	<b>NHC1011</b>	—	—	—	—
	.38"-.44" (9.5-11.0)		Blue	<b>NHC1012</b>	—	—	—	—
1/2	.06"-.13" (1.6-3.2)	F2	Green	—	—	—	—	—
	.13"-.19" (3.2-4.7)		Orange	<b>NHC1020</b>	—	—	<b>NHC1020CR</b>	—
	.19"-.25" (4.7-6.3)		Red	<b>NHC1021</b>	<b>NHC1021ZP</b>	—	<b>NHC1021CR</b>	—
	.25"-.38" (6.3-9.7)		White	<b>NHC1022</b>	<b>NHC1022ZP</b>	—	<b>NHC1022CR</b>	<b>NHC2022CR</b>
	.38"-.50" (9.7-12.7)		Blue	<b>NHC1023</b>	<b>NHC1023ZP</b>	—	<b>NHC1023CR</b>	<b>NHC2023CR</b>
	.50"-.63" (12.7-15.9)		Brown	<b>NHC1024**</b>	<b>NHC1024ZP**</b>	—	<b>NHC1024CR**</b>	<b>NHC2024CR**</b>
3/4	.38"-.50" (9.7-12.7)	F3	Blue	<b>NHC1035</b>	<b>NHC1035ZP</b>	—	<b>NHC1035CR</b>	—
	.50"-.63" (12.7-15.9)		Brown	<b>NHC1036</b>	<b>NHC1036ZP</b>	—	<b>NHC1036CR</b>	—
	.63"-.75" (15.9-19.0)		Yellow	<b>NHC1037</b>	<b>NHC1037ZP</b>	—	<b>NHC1037CR</b>	—
	.75"-.88" (19.0-22.2)		Orchid	<b>NHC1038</b>	<b>NHC1038ZP</b>	—	<b>NHC1038CR</b>	—
1	.50"-.63" (12.7-15.9)	F4	Brown	<b>NHC1040</b>	—	—	—	—
	.63"-.75" (15.9-19.0)		Yellow	<b>NHC1041</b>	<b>NHC1041ZP</b>	—	<b>NHC1041CR</b>	<b>NHC2041CR</b>
	.75"-.88" (19.0-22.2)		Orchid	<b>NHC1042</b>	—	—	<b>NHC1042CR</b>	<b>NHC2042CR**</b>
	.88"-.1.00" (22.2-25.4)		Gray	<b>NHC1043**</b>	—	—	<b>NHC1043CR</b>	<b>NHC2043CR**</b>
	1.00"-.1.13" (25.4-28.7)		Pink	<b>NHC1044**</b>	—	—	—	—
1 1/4	.88"-.1.00" (22.2-25.4)	F5	—	—	—	<b>NHC1051</b>	—	—
	1.00"-.1.13" (25.4-28.6)		—	—	—	<b>NHC1052</b>	—	—
	1.13"-.1.25" (28.6-31.7)		—	—	—	<b>NHC1053**</b>	—	—
	1.25"-.1.38" (31.7-34.9)		—	—	—	<b>NHC1054**</b>	—	—
1 1/2	1.00"-.1.13" (25.4-28.6)	F5	—	—	—	<b>NHC1057</b>	—	—
	1.13"-.1.25" (28.6-31.7)		—	—	—	—	—	—
	1.25"-.1.38" (31.7-34.9)		—	—	—	<b>NHC1059</b>	—	—
2	1.38"-.1.50" (34.9-38.1)	F6	—	—	—	<b>NHC1066</b>	—	



### 45° Male

NPT Hub Size	Cord Diameter Inches (mm)	Form Size	Color Code	Machined Aluminum†	Machined Zinc-Plated SteelΔ	Cast Aluminum
1/2	.19"-.25" (4.7-6.3)	F2	Red	<b>VHC1021</b>	—	—
	.25"-.38" (6.3-9.7)		White	<b>VHC1022</b>	<b>VHC1022ZP</b>	—
	.38"-.50" (9.7-12.7)		Blue	<b>VHC1023</b>	<b>VHC1023ZP</b>	—
	.50"-.63" (12.7-15.9)		Brown	<b>VHC1024**</b>	<b>VHC1024ZP**</b>	—
3/4	.38"-.50" (9.7-12.7)	F3	Blue	<b>VHC1035</b>	—	—
	.50"-.63" (12.7-15.9)		Brown	<b>VHC1036</b>	—	—
	.63"-.75" (15.9-19.0)		Yellow	<b>VHC1037**</b>	—	—
1	.63"-.75" (15.9-19.0)	F4	Yellow	<b>VHC1041</b>	—	—
	.75"-.88" (19.0-22.2)		Orchid	<b>VHC1042</b>	—	—
1 1/4	1.00"-.1.13" (25.4-28.6)	F5	—	—	—	<b>VHC1052</b>
	1.13"-.1.25" (28.6-31.7)		—	—	—	<b>VHC1053**</b>

Note: See pages V-78 to V-88 for technical information and dimensional drawings.

\*IP66 Suitability when used with optional metal clad O-ring, see page V-75 for additional information.

\*\*Cable jacket may have to be stripped to pass through connector body.

†Nuts are machined aluminum and bodies are cast aluminum.

ΔCompression nuts are machined zinc-plated steel and bodies are zinc-plated malleable iron.

Locknuts sold separately. See page V-75 for additional information.





## Straight Female, Underground Feeder and Metric Connectors

Form Size 1-4



### Straight Female

NPT Hub Size	Cord Diameter Inches (mm)	Form Size	Color Code	Machined Aluminum
1/2	.25"-.38" (6.3-9.7)	F2	White	<b>FHC1022</b>
	.38"-.50" (9.7-12.7)		Blue	<b>FHC1023</b>
3/4	.38"-.50" (9.7-12.7)	F2	Blue	<b>FHC1033</b>
	.50"-.63" (12.7-15.9)		Brown	<b>FHC1034</b>
1	.75"-.88" (19.0-22.2)	F4	Orchid	<b>FHC1042†</b>
	.88"-.1.00" (22.2-25.4)		Gray	<b>FHC1043†</b>

Note: See pages V-78 to V-88 for technical information and dimensional drawings.

\*Cable jacket may have to be stripped to pass through connector body.

†Nuts are machined aluminum and bodies are cast aluminum.



**IP66\***  
SUITABILITY



### Underground Feeder Connectors

NPT Hub Size	Cord Diameter Inches (mm)	Wire Size	UF** Machined Aluminum	Machined Zinc-Plated Steel	Nylon Gray	Nylon Black
1/2	.2"x.4" min (5.1 x 10.2)	2 # 14, 2 # 12, 2 # 10.	<b>UFC0001</b>	<b>UFC0001ZP</b>	<b>UFC0001CR</b>	<b>UFC2001CR</b>
	.25"-.55" max (6.3 x 14.0)					
3/4	.2"x.4" min (5.1x10.2)	2 # 14, 2 # 12, 2 # 10.	<b>UFC0002</b>	-	-	-
	.25"-.55" max (6.3x14.0)					
3/4	.2"x.6" min (5.1x15.2)	3 # 14, 3 # 12, 3 # 10.	<b>UFC0003</b>	-	<b>UFC0003CR</b>	<b>UFC2003CR</b>
	.26"x.78" max (6.6x19.8)					

Note: See pages V-78 to V-88 for technical information and dimensional drawings.

\*IP66 Suitability when used with optional metal clad O-ring, see page V-75 for additional information.

\*\*Wire sizes vary among manufacturers.

Locknuts sold separately, see page V-75 for additional information.



UL Listed to  
Type 4, 4X, 12 and 13†

### Metric Aluminum Cord Connectors



Metric Hub Size	Cord Diameter Inches (mm)	Form Size	Color Code	Catalog Number
M16	.31"-.38" (7.9-9.7)	F1	White	<b>SHCM161011</b>
M20	.31"-.38" (7.9-9.7)	F1	White	<b>SHCM201017</b>
	.25"-.38" (6.3-9.7)		White	<b>SHCM201022</b>
M20	.38"-.50" (9.7-12.7)	F2	Blue	<b>SHCM201023</b>
	.50"-.62" (12.7-15.8)		Brown	<b>SHCM201024</b>
M25	.38"-.50" (9.7-12.7)	F2	Blue	<b>SHCM251033</b>
	.50"-.62" (12.7-15.8)		Brown	<b>SHCM251034</b>
M30	.63"-.75" (15.9-19.0)	F3	Yellow	<b>SHCM301037</b>

Note: †When used with metal clad O-ring, see page V-75 for additional information.

Non-metallic Locknuts sold separately, see page V-75 for additional information.



## Low Profile NPT, PG and Metric Thread Connectors

Non-Metallic Cord Connectors

**IP66\***  
SUITABILITY



### Low Profile NPT Cord Connectors

NPT Hub Size	Cord Diameter Inches (mm)	Black	Gray	Non-metallic Locknuts
3/8"	.18"-.31" (4.6-7.9)	<b>SEC38BA*</b>	<b>SEC38GA*</b>	<b>31622002LPK50</b>
1/2"	.17"-.45" (4.3-11.4)	<b>SEC50BA</b>	<b>SEC50GA</b>	<b>31622003LPK50</b>
3/4"	.45"-.71" (11.4-18.0)	<b>SEC75BA</b>	<b>SEC75GA</b>	<b>31622007LPK50</b>
1"	.59"-1.00" (15-25.4)	<b>SEC100BA</b>	<b>SEC100GA</b>	<b>31622008LPK50</b>

Note: See pages V-78 to V-88 for technical information and dimensional drawings.  
Catalog numbers with "PK50" suffix are bulk packed 50 pieces.



### Low Profile PG<sup>Δ</sup> Cord Connectors

Hub Size	Cord Diameter Inches (mm)	Black	Gray	Non-metallic Locknuts
PG7	.11"-.25" (2.9-6.4)	<b>SECP7BA*</b>	<b>SECP7GA*</b>	<b>LNP7BPK100</b>
PG9	.18"-.31" (4.6-7.9)	<b>SECP9BA*</b>	<b>SECP9GA*</b>	<b>LNP9BPK100</b>
PG11	.23"-.40" (5.8-10.0)	<b>SECP11BA*</b>	<b>SECP11GA*</b>	<b>LNP11BPK100</b>
PG13.5	.17"-.47" (4.3-11.9)	<b>SECP13BA</b>	<b>SECP13GA</b>	<b>LNP13BPK100</b>
PG16	.23"-.53" (5.8-13.5)	<b>SECP16BA</b>	<b>SECP16GA</b>	<b>LNP16BPK100</b>
PG21	.45"-.71" (11.4-17.9)	<b>SECP21BA</b>	<b>SECP21GA</b>	<b>LNP21BPK100</b>
PG29	.59"-.99" (15-25.2)	<b>SECP29BA</b>	<b>SECP29GA</b>	<b>LNP29BPK25</b>
PG36	.88"-1.30" (22.2-32.0)	<b>SECP36BA</b>	<b>SECP36GA</b>	<b>LNP36BPK25</b>



### Low Profile Metric Cord Connectors

Hub Size	Cord Diameter Inches (mm)	Black	Gray	Non-metallic Locknuts
M12	.12"-.25" (2.9-6.4)	<b>SECM12B</b>	<b>SECM12G</b>	<b>LNM12BPK100</b>
M16	.11"-.31" (2.7-7.9)	<b>SECM16B</b>	<b>SECM16G</b>	<b>LNM16BPK100</b>
M20	.17"-.45" (4.3-11.4)	<b>SECM20B*</b>	<b>SECM20G*</b>	<b>LNM20BPK100</b>
M25	.49"-.71" (12.3-18.0)	<b>SECM25B*</b>	<b>SECM25G*</b>	<b>LNM25BPK100</b>
M32	.59"-1.00" (15.0-25.4)	<b>SECM32B*</b>	<b>SECM32G*</b>	<b>LNM32BPK100</b>
M40	.87"-1.30" (22.0-32.0)	<b>SECM40B</b>	<b>SECM40G</b>	<b>LNM40BPK100</b>

Note: See pages V-78 to V-88 for technical information and dimensional drawings.  
Catalog numbers above with "PK100" suffix, i.e. LNP7BPK100, are bulk packed 100 per carton.  
Catalog numbers above with "PK25" suffix, i.e. LNP29BPK25, are bulk packed 25 per carton.  
\*Items indicated are UL recognized components.  
<sup>Δ</sup>Panzergewinde.



## Accessories



### Multi-Hole Cord Grip Connectors

NPT Hub Size	Cord Diameter Inches (mm)	Color	Holes	Catalog Number
½	.205" (5.2mm)	Black	2	<b>SEC50B252</b>
¾	.205" (5.2mm)	Black	3	<b>SEC75B352</b>
¾	.205" (5.2mm)	Black	4	<b>SEC75B452</b>
½	.220" (5.6mm)	Black	3	<b>SEC50B356</b>
1	.215" (5.5mm)	Black	9*	<b>SEC100BSMH9</b>
1¼	.215" (5.5mm)	Black	13*	<b>SEC125BSMH13</b>

Note: \*Skinned bushings, field configurable.



### Cord Connector Parts

NPT Hub Size	Cord Diameter Inches (mm)	Form Size	Bushing Catalog Number	Color Code	GOTCHA® Ring Catalog Number
¼, ⅜, ½	.062"-.125" (1.58-3.17)	F1	<b>31518101BPK100</b>	Green	<b>31648035GPK100</b>
	.125"-.187" (3.17-4.76)		<b>31518102BPK100</b>	Orange	<b>31648036GPK100</b>
	.187"-.250" (4.76-6.35)		<b>31518103BPK100</b>	Red	<b>31648037GPK100</b>
	.250"-.312" (6.35-7.93)		<b>31518104BPK100</b>	Black	<b>31648038GPK100</b>
	.312"-.375" (7.93-9.50)		<b>31518105BPK100</b>	White	<b>31605010GPK100</b>
	.375"-.437" (9.50-11.1)		<b>31518106BPK100</b>	Blue	<b>31648039GPK100</b>
½, ¾	.187"-.250" (4.76-6.35)	F2	<b>31518110BPK100</b>	Red	<b>31648042GPK100</b>
	.250"-.375" (6.35-9.50)		<b>31518111BPK100</b>	White	<b>31605015GPK100</b>
	.375"-.500" (9.50-12.7)		<b>31518112BPK100</b>	Blue	<b>31648043GPK100</b>
	.500"-.625" (12.7-15.8)		<b>31518113BPK100</b>	Brown	<b>31648044GPK100</b>
½, ¾	.375"-.500" (9.50-12.7)	F3	<b>31518116BPK100</b>	Blue	<b>31648045GPK100</b>
	.500"-.625" (12.7-15.8)		<b>31518117BPK100</b>	Brown	<b>31648046GPK100</b>
	.625"-.750" (15.8-19.0)		<b>31518118BPK100</b>	Yellow	<b>31648047GPK100</b>
	.750"-.875" (19.0-22.2)		<b>31518119BPK100</b>	Orchid	<b>31648048GPK100</b>
1	.500"-.625" (12.7-15.8)	F4	<b>31518123BPK100</b>	Brown	<b>31648050GPK100</b>
	.625"-.750" (15.8-19.0)		<b>31518124BPK100</b>	Yellow	<b>31648051GPK100</b>
	.750"-.875" (19.0-22.2)		<b>31518125BPK100</b>	Orchid	<b>31648052GPK100</b>
	.875"-1.00" (22.2-25.4)		<b>31518126BPK100</b>	Gray	<b>31648053GPK100</b>
	1.00"-1.125" (25.4-28.5)		<b>31518127BPK100</b>	Pink	<b>31648054GPK100</b>

Note: Catalog numbers above with "PK100" suffix, i.e. 31518101BPK100, are bulk packed 100 per carton



### Locknuts and Metal Clad Sealing O-Rings

NPT Hub Size	Zinc-Plated Steel Locknuts	Non-Metallic Locknuts	Metal Clad Sealing O-Rings*
¼	—	<b>31622001LPK50</b>	—
⅜	—	<b>31622002LPK50</b>	—
½	<b>00322001LPK50</b>	<b>31622003LPK50</b>	<b>20509001</b>
¾	<b>00322002LPK50</b>	<b>31622007LPK50</b>	<b>20509002</b>
1	<b>00322003LPK50</b>	<b>31622008LPK50</b>	<b>20509003</b>
1¼	<b>00322004LPK50</b>	—	<b>20509004</b>
1½	<b>00322005LPK50</b>	—	<b>20509005</b>
2	—	—	<b>20509006</b>
2½	—	—	<b>20509007</b>
3	—	—	<b>20509008</b>

Note: Catalog numbers above with "PK50" suffix, i.e. 00322001LPK50, are bulk packed 50 per carton.

See page V-87 for technical information and dimensional drawings.

\*UL listed and CSA certified.



## Features and Benefits

### Hubbell Juniors® Miniature Nylon Cord Connectors

Hubbell Juniors are a miniature liquidtight version of the full-sized Hubbell cord connectors. They feature the same GOTCHA® ring technology and neoprene bushings.

They also come with or without a nylon spiral for arc-of-bend control and longer cord life. They are available in ¼", ⅜", and ½" NPT sizes in both gray and black.



HJ1040GPK25



#### Liquidtight Seal

- Lubricated neoprene bushing compresses evenly for a liquidtight seal and added pull-out protection
- Nylon connector body is a one-piece design with a tapered interior that seals the bushing evenly for a positive seal



#### Connector Body

- Nylon spiral provides arc-of-bend control for cord protection
- Threaded hexagon shaped nylon locknut secures tightly and is also corrosion resistant



#### Connector Protection

- Patented GOTCHA® ring incorporates a split hinge design to prevent friction and provide strain relief
- Nylon compression nut has a tapered interior dome to easily drive the bushing into the connector body



#### Comprehensive Offering

- Hubbell Juniors are a miniature liquidtight version of the full-sized Hubbell cord connectors and feature the same GOTCHA® ring technology and neoprene bushings

## Hubbell Juniors® Miniature Nylon Cord Connectors

### Miniature Nylon Cord Connector

NPT Hub Size	Cord Diameter Range Inches (mm)	Black	Gray
¼	.08"-.14" (1.9-3.4)	HJ1001BPK25	HJ1001GPK25
	.14"-.20" (3.4-5.1)	HJ1002BPK25	HJ1002GPK25
	.20"-.27" (5.1-6.7)	HJ1003BPK25	HJ1003GPK25
⅜	.15"-.21" (3.7-5.3)	HJ1004BPK25	HJ1004GPK25
	.21"-.28" (5.3-7.0)	HJ1005BPK25	HJ1005GPK25
	.28"-.34" (7.0-8.6)	HJ1006BPK25	HJ1006GPK25
½	.06"-.13" (1.6-3.2)	HJ1055BPK25	HJ1055GPK25
	.13"-.19" (3.2-4.7)	HJ1056BPK25	HJ1056GPK25
	.19"-.25" (4.7-6.3)	HJ1057BPK25	HJ1057GPK25
	.25"-.31" (6.3-7.9)	HJ1058BPK25	HJ1058GPK25
	.31"-.38" (7.9-9.5)	HJ1059BPK25	HJ1059GPK25
	.38"-.44" (9.5-11.1)	HJ1060BPK25	HJ1060GPK25



Black Cord Connector



Gray Cord Connector

### Miniature Nylon Cord Connector with Spiral

NPT Hub Size	Cord Diameter Range Inches (mm)	Black	Gray
¼	.08"-.14" (1.9-3.4)	HJ1010BPK25	HJ1010GPK25
	.14"-.20" (3.4-5.1)	HJ1011BPK25	HJ1011GPK25
	.20"-.27" (5.1-6.7)	HJ1012BPK25	HJ1012GPK25
⅜	.15"-.21" (3.7-5.3)	HJ1013BPK25	HJ1013GPK25
	.21"-.28" (5.3-7.0)	HJ1014BPK25	HJ1014GPK25
	.28"-.34" (7.0-8.6)	HJ1015BPK25	HJ1015GPK25
½	.13"-.19" (3.2-4.7)	HJ1038BPK25	HJ1038GPK25
	.19"-.25" (4.7-6.3)	HJ1039BPK25	HJ1039GPK25
	.25"-.31" (6.3-7.9)	HJ1040BPK25	HJ1040GPK25
	.31"-.38" (7.9-9.5)	HJ1041BPK25	HJ1041GPK25
	.38"-.44" (9.5-11.1)	HJ1042BPK25	HJ1042GPK25
¾	.25"-.49" (6.4-12.3)	HJ1043BPK25*	HJ1043GPK25*
	.45"-.71" (11.4-18.0)	HJ1044BPK25*	HJ1044GPK25*



Black Cord Connector with Spiral



Gray Cord Connector with Spiral

Note: \*Locknuts sold separately, see page V-75 for additional information.

### Miniature Nylon Snap-In Cord Connector with Spiral

Cord Diameter Range Inches (mm)	For Chassis Thickness	Black	Gray
.22"-.27" (5.6-6.9)	.10" (2.5) Max	HS1001BPK25	HS1001GPK25
.28"-.32" (7.1-8.1)	.10" (2.5) Max	HS1002BPK25	HS1002GPK25
.30"-.36" (7.6-9.1)	.13" (3.2) Max	HS1003BPK25	HS1003GPK25
.32"-.43" (8.1-10.9)	.13" (3.2) Max	HS1004BPK25	HS1004GPK25

Note: Catalog numbers above with "PK25" suffix, i.e. HJ1001GPK25, are bulk packed 25 per carton. See page V-88 for technical information and dimensional drawings.



Black Snap-In Cord Connector



Gray Snap-In Cord Connector



## Operating Temperatures

Material	Temperature Range	
Aluminum	-40°F to +300°F	(-40°C to +149°C)
Nylon (connectors and GOTCHA® rings)	-40°F to +225°F	(-40°C to +107°C)
Plated steel*	-60°F to +1000°F	(-51°C to +537°C)
Stainless steel*	-60°F to +1000°F	(-51°C to +537°C)
Neoprene (bushings)	-30°F to +240°F	(-34°C to +115°C)

Note: \*Due to the limiting factors of nylon and neoprene, any complete cord connector with a GOTCHA ring, Form 1-5, will continuously perform in the range of -30°F to +225°F (-34°C to +107°C).

Cord connectors without GOTCHA rings, Form 6-8, will continuously operate in the range -30°F to +240°F (-34°C to +115°C) due to the limiting factor of neoprene.

## Hazardous Locations

Hubbell cord connectors are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 in accordance with the NEC.

## Flammability

Hubbell nylon cord connectors have a UL 94-V2 rating.

## Approvals

### Agency

UL Listed in accordance with Standard 514B for indoor/outdoor use.

CSA Certified.

United States Coast Guard Approved, Title 46-Part 111.

## Form Size Definition

The term "Form Size" refers to the physical overall size of a cord connector.

Form 1 is the smallest size.

Form 8 is the largest size.

## Knockout Holes

NPT Hub Size	Knockout Hole Recommended		PG Hub Size	Knockout Hole Recommended		Metric Hub Size	Knockout Hole Recommended	
	Min.	Max.		Inches	(mm)		Inches	(mm)
¼	.54"	.57"	PG7	.492"	(12.5)	M12	.472"	(12)
⅜	.67"	.70"	PG9	.599"	(15.2)	M16	.629"	(16)
½	.86"	.91"	PG11	.733"	(18.6)	M20	.787"	(20)
¾	1.04"	1.09"	PG13.5	.804"	(20.4)	M25	.984"	(25)
1	1.36"	1.41"	PG16	.888"	(22.5)	M32	1.25"	(32)
1¼	1.72"	1.77"	PG21	1.15"	(28.3)	M40	1.57"	(40)
1½	1.97"	2.02"	PG29	1.47"	(34.3)			
2	2.45"	2.50"	PG36	1.85"	(47.0)			
2½	2.95"	3.00"						
3	3.58"	3.63"						

## NPT, PG and Metric Thread Low Profile Connectors

### Specifications

Material	6/6 Nylon.
Gland	Buna N.
Temperature Range	-22°F to 225°F (-30°C to 107°C).
	Cord Connectors are Halogen and Silicon free.
Protection Class	IP66 Suitability.
Flammability	UL 94V-2.
Listings/Certifications	UL Listing File E-41567, UL Recognition File E-41567. CSA File LR27378C, VDE Marks Licence #136681.




SECP29G



## Straight Hubbell Connectors

F NPT Inches	Aluminum Inches (mm)						Nylon Inches (mm)						
	Form	A Dia.	B Ref.	C	D Throat Dia.	E		A Dia.	B Ref.	C	D Throat Dia.	E	
						A/C*	A/F*					A/C*	A/F*
¼-18	1	.88" (22.4)	.90" (22.9)	.46" (11.7)	.32" (8.1)	.99" (25.1)	.88" (22.4)	1.00" (25.4)	1.10" (27.9)	.43" (10.9)	.33" (8.4)	1.00" (25.4)	.93" (23.6)
¾-18	1	.88" (22.4)	.90" (22.9)	.46" (11.7)	.44" (11.2)	.99" (25.1)	.88" (22.4)	1.00" (25.4)	1.10" (27.9)	.43" (10.9)	.45" (11.4)	1.00" (25.4)	.93" (23.6)
½-14	1	.88" (22.4)	.90" (22.9)	.46" (11.7)	.44" (11.2)	1.00" (25.4)	.88" (22.4)	1.00" (25.4)	1.10" (27.9)	.46" (11.7)	.45" (11.4)	1.00" (25.4)	.93" (23.6)
½-14	2	1.13" (28.7)	1.10" (27.9)	.55" (14.0)	.64" (16.3)	1.11" (28.2)	1.00" (25.4)	1.32" (33.5)	1.50" (38.1)	.53" (13.5)	.58" (14.7)	1.25" (31.7)	1.12" (28.4)
½-14	3	1.38" (35.1)	1.50" (38.1)	.55" (14.0)	.64" (16.3)	1.40" (35.6)	1.25" (31.7)	—	—	—	—	—	—
¾-14	2	1.13" (28.7)	1.10" (27.9)	.55" (14.0)	.64" (16.3)	1.29" (32.8)	1.13" (28.7)	—	—	—	—	—	—
¾-14	3	1.38" (35.1)	1.50" (38.1)	.55" (14.0)	.82" (20.8)	1.40" (35.6)	1.25" (31.7)	1.56" (39.6)	1.60" (40.6)	.55" (14.0)	.77" (19.6)	1.44" (36.6)	1.31" (33.3)
1-11½	4	1.75" (44.4)	1.60" (40.6)	.71" (18.0)	1.02" (25.9)	1.81" (46.0)	1.62" (41.1)	1.88" (47.8)	1.75" (44.4)	.70" (17.8)	1.01" (25.7)	1.84" (46.7)	1.63" (41.4)
1-11½	5	2.31" (58.7)	1.70" (43.2)	.66" (16.8)	1.01" (25.7)	2.28" (57.9)	2.00" (50.8)	—	—	—	—	—	—
1¼-11½	5	2.31" (58.7)	1.70" (43.2)	.74" (18.8)	1.26" (32.0)	2.28" (57.9)	2.12" (53.8)	—	—	—	—	—	—
1½-11½	5	2.31" (58.7)	1.70" (43.2)	.74" (18.8)	1.38" (35.1)	2.28" (57.9)	2.12" (53.8)	—	—	—	—	—	—
1½-11½	6	3.00" (76.2)	2.20" (55.9)	.75" (19.0)	1.50" (38.1)	2.97" (75.4)	2.75" (69.8)	—	—	—	—	—	—
2-11½	6	3.00" (76.2)	2.20" (55.9)	.80" (20.3)	1.92" (48.8)	3.24" (82.4)	3.00" (76.2)	—	—	—	—	—	—
2-11½	7	3.85" (97.8)	2.70" (68.6)	.88" (22.4)	1.94" (49.3)	4.05" (102.9)	3.75" (95.2)	—	—	—	—	—	—
2½-8	7	3.85" (97.8)	2.70" (68.6)	1.30" (33.0)	2.32" (58.9)	4.34" (110.2)	4.02" (102.1)	—	—	—	—	—	—
2½-8	8	4.75" (120.6)	2.70" (68.6)	1.25" (31.7)	2.38" (60.5)	4.86" (123.4)	4.50" (114.3)	—	—	—	—	—	—
3-8	7	3.85" (97.8)	2.70" (68.6)	1.30" (33.0)	2.54" (64.5)	4.34" (110.2)	4.02" (102.1)	—	—	—	—	—	—
3-8	8	4.50" (114.3)	2.70" (68.6)	1.38" (35.1)	3.00" (76.2)	4.86" (123.4)	4.50" (114.3)	—	—	—	—	—	—

Note: \*A/C— Across Corners; A/F—Across Flats.




Dimensions shown are approximate and are subject to change without notice.



## Straight Hubbell Connectors

F NPT Inches	Zinc-Plated Steel Inches (mm)							Stainless Steel Inches (mm)							
	Form	A		B	C	D Throat Dia.	E		A		B	C	D Throat Dia.	E	
		A/C*	A/F*	Ref.			A/C*	A/F*	A/C*	A/F*	Ref.			A/C*	A/F*
¼-18	1	—	—	—	—	—	—	—	1.01" (25.7)	.88" (22.4)	.90" (22.9)	.46" (11.7)	.38" (9.7)	.87" (22.1)	.75" (19.0)
¾-18	1	.98" (24.9)	.88" (22.4)	.90" (22.9)	.42" (10.7)	.45" (11.4)	.99" (25.1)	.88" (22.4)	1.01" (25.7)	.88" (22.4)	.90" (22.9)	.46" (11.7)	.45" (11.4)	.87" (22.1)	.75" (19.0)
½-14	1	.98" (24.9)	.88" (22.4)	.90" (22.9)	.55" (14.0)	.45" (11.4)	1.00" (25.4)	.88" (22.4)	—	—	—	—	—	—	—
½-14	2	1.27" (32.3)	1.13" (28.7)	1.20" (30.5)	.55" (14.0)	.64" (16.3)	1.10" (28.2)	1.00" (25.4)	1.30" (33.0)	1.13" (28.7)	1.10" (27.9)	.54" (13.7)	.63" (16.0)	1.16" (29.5)	1.00" (25.4)
½-14	3	1.55" (39.4)	1.38" (35.1)	1.50" (38.1)	.55" (14.0)	.64" (16.3)	1.40" (35.6)	1.25" (31.7)	—	—	—	—	—	—	—
¾-14	2	1.27" (32.3)	1.13" (28.7)	1.20" (30.5)	.55" (14.0)	.64" (16.3)	1.29" (32.8)	1.13" (28.7)	—	—	—	—	—	—	—
¾-14	3	1.55" (39.4)	1.38" (35.1)	1.40" (35.6)	.55" (14.0)	.82" (20.8)	1.40" (35.6)	1.25" (31.7)	1.59" (40.4)	1.38" (35.1)	1.30" (33.0)	.56" (14.2)	.81" (20.6)	1.44" (36.6)	1.25" (31.7)
1-1½	3	1.55" (39.4)	1.38" (35.1)	1.40" (35.6)	.70" (17.8)	.89" (22.6)	1.54" (39.1)	1.38" (35.1)	—	—	—	—	—	—	—
1-1½	4	1.92" (48.8)	1.69" (42.9)	1.60" (40.6)	.70" (17.8)	1.02" (25.9)	1.95" (49.5)	1.69" (42.9)	2.02" (51.3)	1.75" (44.4)	1.40" (35.6)	.70" (17.8)	1.03" (26.2)	1.88" (47.8)	1.63" (41.4)
1-1½	5	2.40" (61.0)	—	1.70" (43.2)	.70" (17.8)	1.02" (25.9)	2.46" (62.5)	2.15" (54.6)	—	—	—	—	—	—	—
1¼-1½	5	2.40" (61.0)	—	1.70" (43.2)	.73" (18.5)	1.27" (32.3)	2.48" (63.0)	2.19" (55.6)	—	—	—	—	—	—	—
1½-1½	5	2.40" (61.0)	—	1.70" (43.2)	.74" (18.8)	1.39" (35.3)	2.48" (63.0)	2.19" (55.6)	—	—	—	—	—	—	—
1½-1½	6	3.06" (77.7)	—	2.20" (55.9)	.75" (19.0)	1.52" (38.6)	3.04" (77.2)	2.83" (71.9)	—	—	—	—	—	—	—
2-1½	6	3.06" (77.7)	—	2.20" (55.9)	.78" (19.8)	1.92" (48.8)	3.32" (84.3)	3.07" (78.0)	—	—	—	—	—	—	—
2-1½	7	3.95" (100.3)	—	2.70" (68.6)	.78" (19.8)	1.99" (50.5)	4.18" (106.2)	3.89" (98.8)	—	—	—	—	—	—	—

Note: \*A/C— Across Corners; A/F—Across Flats.



Dimensions shown are approximate and are subject to change without notice.





## 45° Hubbell Connectors



F NPT Inches	Aluminum Inches (mm)								Zinc Plated Steel Inches (mm)							
	Form	A Dia.	B Ref.	C	D Throat Dia.	E		G Dia.	A Dia.	B Ref.	C	D Throat Dia.	E		G	
						Across Corners	Across Flats						Across Corners	Across Flats	Across Corners	Across Flats
1/2-14	2	2.00" (50.8)	1.90" (48.3)	.55" (14.0)	.56" (14.2)	1.27" (32.3)	1.10" (27.9)	1.13" (28.6)	1.97" (50.0)	1.90" (48.3)	.55" (14.0)	.57" (14.4)	1.24" (31.5)	1.06" (26.9)	1.27" (32.3)	1.13" (28.6)
3/4-14	3	2.30" (58.4)	2.50" (65.3)	.56" (14.2)	.75" (19.0)	1.48" (37.6)	1.28" (32.5)	1.38" (34.9)	—	—	—	—	—	—	—	—
1-11½	4	2.60" (66.0)	2.80" (71.1)	.70" (17.8)	1.00" (25.4)	1.69" (42.9)	1.50" (38.1)	1.75" (44.4)	—	—	—	—	—	—	—	—
1½-11½	5	3.90" (99.1)	3.90" (99.1)	.74" (18.8)	1.25" (31.7)	2.45" (62.2)	2.13" (54.0)	2.31" (58.7)	—	—	—	—	—	—	—	—
1½-11½	5	3.90" (99.1)	3.90" (99.1)	.74" (18.8)	1.50" (38.1)	2.45" (62.2)	2.13" (54.0)	2.31" (58.7)	—	—	—	—	—	—	—	—

## 90° Hubbell Connectors

F NPT Inches	Aluminum Inches (mm)								Zinc Plated Steel Inches (mm)							
	Form	A Dia.	B Ref.	C	D Throat Dia.	E		G Dia.	A Dia.	B Ref.	C	D Throat Dia.	E		G	
						Across Corners	Across Flats						Across Corners	Across Flats	Across Corners	Across Flats
3/8-18	1	1.27" (32.3)	2.00" (50.8)	.46" (11.7)	.44" (11.2)	1.15" (29.2)	1.10" (27.9)	.88" (22.2)	—	—	—	—	—	—	—	—
1/2-14	2	1.56" (39.6)	2.30" (58.4)	.50" (12.7)	.55" (13.9)	1.30" (33.0)	1.13" (28.7)	1.13" (28.6)	1.65" (41.9)	2.38" (60.5)	.55" (14.0)	.55" (13.8)	1.29" (32.8)	1.13" (28.7)	1.27" (32.3)	1.13" (28.6)
3/4-14	3	1.79" (45.5)	2.80" (71.1)	.56" (14.2)	.77" (19.4)	1.49" (37.8)	1.31" (33.3)	1.38" (34.9)	1.88" (47.8)	2.90" (73.7)	.56" (14.2)	.77" (19.4)	1.52" (38.6)	1.33" (33.8)	1.55" (39.2)	1.38" (34.9)
1-11½	4	2.08" (52.8)	3.20" (81.3)	.70" (17.8)	1.00" (25.4)	1.70" (43.2)	1.50" (38.1)	1.75" (44.4)	2.16" (54.9)	3.20" (81.3)	.70" (17.8)	1.00" (25.4)	1.72" (43.7)	1.50" (38.1)	1.92" (48.8)	1.69" (42.8)
1¼-11½	5	3.18" (80.8)	4.30" (109.2)	.73" (18.5)	1.26" (32.0)	2.47" (62.7)	2.15" (54.6)	2.31" (58.7)	—	—	—	—	—	—	—	—
1½-11½	5	3.18" (80.8)	4.30" (109.2)	.75" (19.2)	1.50" (38.1)	2.47" (62.7)	2.15" (54.6)	2.31" (58.7)	—	—	—	—	—	—	—	—
2-11½	6	3.51" (89.2)	5.50" (139.7)	.80" (20.3)	1.92" (48.8)	2.98" (75.7)	2.78" (70.6)	3.00" (76.2)	—	—	—	—	—	—	—	—

## 90° Hubbell Connectors

F NPT Inches	Nylon Inches (mm)							
	Form	A Dia.	B Ref.	C	D Throat Dia.	E		G Dia.
						Across Corners	Across Flats	
3/8-18	1	—	—	—	—	—	—	—
1/2-14	2	1.41" (35.8)	2.50" (63.5)	.55" (14.0)	.58" (14.6)	1.23" (31.2)	1.12" (28.2)	1.32" (33.4)
3/4-14	3	1.65" (41.9)	2.81" (71.4)	.56" (14.2)	.77" (19.4)	1.42" (36.1)	1.29" (32.8)	1.56" (39.6)
1-11½	4	1.99" (50.5)	3.30" (83.8)	.70" (17.8)	1.01" (25.7)	1.82" (46.2)	1.60" (40.6)	1.88" (47.6)

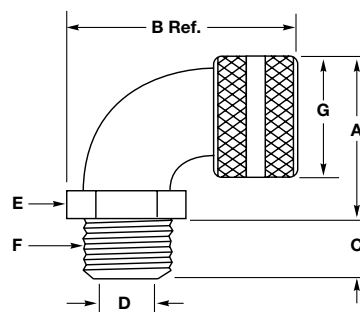



Dimensions shown are approximate and are subject to change without notice.



## Female Hubbell Connectors

Aluminum Inches (mm)							
F NPT Inches	Form	A		C	D Throat Dia.	E	
		Dia.	Ref.			Across Corners	Across Flats
3/8-18	1	.88" (22.4)	1.40" (35.6)	.56" (14.2)	.44" (11.2)	.94" (23.9)	.81" (20.6)
1/2-14	2	1.13" (28.7)	1.80" (45.7)	.56" (14.2)	.63" (16.0)	1.15" (29.2)	1.00" (25.4)
3/4-14	2	1.13" (28.7)	2.10" (53.3)	.75" (19.0)	.63" (16.0)	1.44" (36.6)	1.25" (31.7)
1-11 1/2	4	1.75" (44.5)	2.30" (58.4)	.88" (22.4)	1.10" (27.9)	1.88" (47.8)	1.63" (41.4)
1 1/4-11 1/2	5	2.31" (58.7)	2.80" (71.1)	.95" (24.1)	1.43" (36.3)	2.64" (67.1)	2.29" (58.2)
1 1/2-11 1/2	5	2.31" (58.7)	2.80" (71.1)	.95" (24.1)	1.43" (36.3)	2.64" (67.1)	2.29" (58.2)

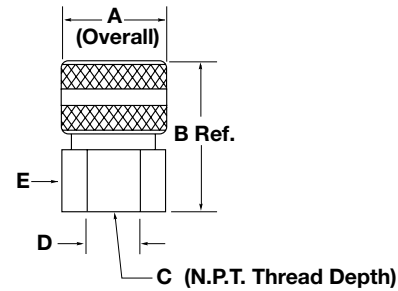



## Underground Feeder Connectors

F NPT Inches	Form	Aluminum Inches (mm)						Zinc-Plated Steel Inches (mm)						Nylon Inches (mm)							
		A		C	D Throat Dia.	E		A		B	C	D Throat Dia.	E		A		B	C	D Throat Dia.	E	
		Dia.	Ref.			A/C*	A/F*	A/C*	A/F*				A/C*	A/F*	Dia.	Ref.				A/C*	A/F*
1/2-14	2	1.13" (28.7)	1.10" (27.9)	.55" (14.0)	.64" (16.3)	1.10" (27.9)	1.00" (25.4)	1.27" (32.3)	1.13" (28.7)	1.20" (30.5)	.55" (14.0)	.64" (16.3)	1.11" (28.2)	1.00" (25.4)	1.32" (33.5)	1.50" (38.1)	.55" (14.0)	.58" (14.7)	1.25" (31.7)	1.13" (28.7)	
3/4-14	2	1.13" (28.7)	1.10" (27.9)	.55" (14.0)	.64" (16.3)	1.29" (32.8)	1.13" (25.4)	1.27" (32.3)	1.13" (28.7)	1.20" (30.5)	.55" (14.0)	.64" (16.3)	1.29" (32.8)	1.13" (28.7)	—	—	—	—	—	—	
3/4-14	3	1.13" (28.7)	1.50" (38.1)	.55" (14.0)	.82" (20.8)	1.40" (35.6)	1.25" (31.7)	1.55" (39.4)	1.38" (35.1)	1.40" (35.6)	.56" (14.2)	.82" (20.8)	1.40" (35.6)	1.25" (31.7)	1.56" (39.6)	1.60" (40.6)	.56" (14.2)	.77" (19.6)	1.44" (36.6)	1.31" (33.3)	

Note: \*A/C - Across Corners; A/F - Across Flats.

## Low Profile Non-Metallic NPT, PG and Metric Thread Connectors

Hub Size	Nylon Inches (mm)					
	A	B	C	D	E	F
3/8 NPT	0.670" (17.0)	1.41" (35.8)	0.48" (12.4)	0.21" (5.3)	0.83" (21.0)	0.55" (14.0)
1/2 NPT	0.875" (22.2)	1.70" (43.2)	0.61" (15.5)	0.21" (5.3)	0.88" (24.8)	0.66" (16.8)
3/4 NPT	1.068" (27.1)	2.00" (50.8)	0.62" (15.7)	0.25" (6.3)	1.30" (33.0)	0.85" (21.6)
1 NPT	1.375" (35.0)	2.41" (61.2)	0.76" (19.3)	0.30" (7.6)	1.73" (43.9)	1.05" (26.7)
PG7	0.492" (12.5)	1.16" (29.5)	0.32" (8.1)	0.21" (5.3)	0.63" (16.0)	0.48" (12.4)
PG9	0.599" (15.2)	1.25" (31.8)	0.32" (8.1)	0.21" (5.3)	0.83" (21.0)	0.55" (14.0)
PG11	0.733" (18.6)	1.48" (37.6)	0.38" (9.7)	0.21" (5.3)	0.94" (23.9)	0.70" (17.8)
PG13.5	0.804" (20.4)	1.53" (38.9)	0.41" (10.4)	0.21" (5.3)	0.98" (24.9)	0.66" (16.8)
PG16	0.888" (22.5)	1.68" (42.7)	0.44" (11.2)	0.25" (6.4)	1.06" (27.0)	0.76" (19.3)
PG21	1.15" (28.3)	1.89" (48.0)	0.52" (13.2)	0.25" (6.4)	1.30" (33.0)	.085" (21.6)
PG29	1.47" (37.30)	2.23" (56.6)	0.58" (14.7)	0.30" (7.6)	1.73" (43.9)	1.05" (26.7)
PG36	1.85" (47.0)	2.39" (60.7)	0.47" (11.9)	0.31" (7.9)	2.05" (52.7)	1.19" (30.2)
M12	0.473" (12.0)	1.16" (29.5)	0.32" (8.1)	0.21" (5.3)	0.63" (16.0)	0.49" (12.4)
M16	0.630" (16.0)	1.25" (31.8)	0.32" (8.1)	0.21" (5.3)	0.83" (21.0)	0.55" (14.0)
M20	0.787" (20.0)	1.53" (38.9)	0.41" (10.4)	0.21" (5.3)	0.98" (24.9)	0.66" (16.8)
M25	0.985" (25.0)	1.89" (48.0)	0.52" (13.2)	0.25" (6.3)	1.30" (33.0)	0.85" (21.6)
M32	1.260" (32.0)	2.23" (56.6)	0.58" (14.7)	0.30" (7.6)	1.73" (43.9)	1.05" (26.7)
M40	1.575" (40.0)	2.39" (60.7)	0.48" (12.2)	0.30" (7.6)	2.05" (52.1)	1.19" (30.2)



Recommended knockout size

Dimensions shown are approximate and are subject to change without notice.



## 2 Conductors

Cord Type	SVO, SV, SVT	SJ, SJO, SJT, SJTO				S, SO, ST, STO					
Cord Size	#18	#18	#16	#14	#18	#16	#14	#12	#10	#8	
Approx. Dia. Inches (mm)	.25" (6.2)	.31" (7.8)	.33" (8.4)	.37" (9.3)	.38" (9.7)	.40" (10.2)	.54" (13.7)	.62" (15.6)	.68" (17.1)	.81" (20.6)	
Color	Black	Black	White	White	Blue	Blue	Brown	Brown	Yellow	Orchid	
NPT	Form	Catalog Number*									
¼	1	<b>HC1004</b>	<b>HC1004</b>	<b>HC1005</b>	<b>HC1005</b>	<b>HC1006</b>	<b>HC1006</b>	—	—	—	—
⅜	1	<b>HC1010</b>	<b>HC1010</b>	<b>HC1011</b>	<b>HC1011</b>	<b>HC1012</b>	<b>HC1012</b>	—	—	—	—
½	1	<b>HC1016</b>	<b>HC1016</b>	<b>HC1017</b>	<b>HC1017</b>	<b>HC1018</b>	<b>HC1018</b>	—	—	—	—
½	2	<b>HC1022</b>	<b>HC1022</b>	<b>HC1022</b>	<b>HC1022</b>	<b>HC1023</b>	<b>HC1023</b>	<b>HC1024</b>	<b>HC1024</b>	—	—
½	3	—	—	—	—	<b>HC1025</b>	<b>HC1025</b>	<b>HC1026</b>	<b>HC1026</b>	<b>HC1027</b>	<b>HC1028</b>
¾	2	<b>HC1032</b>	<b>HC1032</b>	<b>HC1032</b>	<b>HC1032</b>	<b>HC1033</b>	<b>HC1033</b>	<b>HC1034</b>	<b>HC1034</b>	—	—
¾	3	—	—	—	—	<b>HC1035</b>	<b>HC1035</b>	<b>HC1036</b>	<b>HC1036</b>	<b>HC1037</b>	<b>HC1038</b>
1	4	—	—	—	—	<b>HC1039</b>	<b>HC1039</b>	<b>HC1040</b>	<b>HC1040</b>	<b>HC1041</b>	<b>HC1042</b>
1	5	—	—	—	—	—	—	—	—	—	<b>HC1045</b>
1¼	5	—	—	—	—	—	—	—	—	—	<b>HC1050</b>
1½	5	—	—	—	—	—	—	—	—	—	<b>HC1055</b>
1½	6	—	—	—	—	—	—	—	—	—	—
2	6	—	—	—	—	—	—	—	—	—	—
2	7	—	—	—	—	—	—	—	—	—	—
2½	7	—	—	—	—	—	—	—	—	—	—
3	7	—	—	—	—	—	—	—	—	—	—

Note: \*Must add prefix, see Note 1; suffix, see Note 2, on page V-86.  
 †F5 and larger will not be color coded.

## 3 Conductors

Cord Type	SVO, SV, SVT	SJ, SJO, SJT, SJTO				S, SO, ST, STO					
Cord Size	#18	#18	#16	#14	#18	#16	#14	#12	#10	#8	
Approx. Dia. Inches (mm)	.26" (6.5)	.33" (8.3)	.35" (8.9)	.39" (9.8)	.39" (9.9)	.42" (10.7)	.57" (14.4)	.65" (16.4)	.71" (18.0)	.85" (21.5)	
Color	Black	White	White	Blue	Blue	Blue	Brown	Yellow	Yellow	Orchid	
NPT	Form	Catalog Number*									
¼	1	<b>HC1004</b>	<b>HC1005</b>	<b>HC1005</b>	<b>HC1006</b>	<b>HC1006</b>	<b>HC1006</b>	—	—	—	—
⅜	1	<b>HC1010</b>	<b>HC1011</b>	<b>HC1011</b>	<b>HC1012</b>	<b>HC1012</b>	<b>HC1012</b>	—	—	—	—
½	1	<b>HC1016</b>	<b>HC1017</b>	<b>HC1017</b>	<b>HC1018</b>	<b>HC1018</b>	<b>HC1018</b>	—	—	—	—
½	2	<b>HC1022</b>	<b>HC1022</b>	<b>HC1022</b>	<b>HC1023</b>	<b>HC1023</b>	<b>HC1023</b>	<b>HC1024</b>	—	—	—
½	3	—	—	—	<b>HC1025</b>	<b>HC1025</b>	<b>HC1025</b>	<b>HC1026</b>	<b>HC1027</b>	<b>HC1027</b>	<b>HC1028</b>
¾	2	<b>HC1032</b>	<b>HC1032</b>	<b>HC1032</b>	<b>HC1033</b>	<b>HC1033</b>	<b>HC1033</b>	<b>HC1034</b>	—	—	—
¾	3	—	—	—	<b>HC1035</b>	<b>HC1035</b>	<b>HC1035</b>	<b>HC1036</b>	<b>HC1037</b>	<b>HC1037</b>	<b>HC1038</b>
1	4	—	—	—	<b>HC1039</b>	<b>HC1039</b>	<b>HC1039</b>	<b>HC1040</b>	<b>HC1041</b>	<b>HC1041</b>	<b>HC1042</b>
1	5	—	—	—	—	—	—	—	—	—	<b>HC1045</b>
1¼	5	—	—	—	—	—	—	—	—	—	<b>HC1050</b>
1½	5	—	—	—	—	—	—	—	—	—	<b>HC1055</b>
1½	6	—	—	—	—	—	—	—	—	—	—
2	6	—	—	—	—	—	—	—	—	—	—
2	7	—	—	—	—	—	—	—	—	—	—
2½	7	—	—	—	—	—	—	—	—	—	—
3	7	—	—	—	—	—	—	—	—	—	—

Note: \*Must add prefix, see Note 1; suffix, see Note 2, on page V-95.  
 †F5 and larger will not be color coded.



## 2 Conductors

Cord Type	SVO, SV, SVT			SJ, SJO, SJT, SJTO			S, SO, ST, STO			
Cord Size	#6	#4	#3	#2	#1	#1/0	#2/0	#3/0	#4/0	#250
Approx. Dia. Inches (mm)	.94" (23.8)	1.08" (27.4)	1.17" (29.7)	1.27" (33.3)	1.44" (36.6)	1.52" (38.6)	1.65" (41.9)	1.77" (45.0)	1.92" (48.8)	2.16" (51.9)
Color	Gray‡	Pink‡	‡	‡	‡	‡	‡	‡	‡	‡
NPT	Form	Catalog Number*								
¼	1	—	—	—	—	—	—	—	—	—
¾	1	—	—	—	—	—	—	—	—	—
½	1	—	—	—	—	—	—	—	—	—
½	2	—	—	—	—	—	—	—	—	—
½	3	—	—	—	—	—	—	—	—	—
¾	2	—	—	—	—	—	—	—	—	—
¾	3	—	—	—	—	—	—	—	—	—
1	4	<b>HC1043</b>	<b>HC1044</b>	—	—	—	—	—	—	—
1	5	<b>HC1046</b>	<b>HC1047</b>	<b>HC1048</b>	<b>HC1049</b>	—	—	—	—	—
1¼	5	<b>HC1051</b>	<b>HC1052</b>	<b>HC1053</b>	<b>HC1054</b>	—	—	—	—	—
1½	5	<b>HC1056</b>	<b>HC1057</b>	<b>HC1058</b>	<b>HC1059</b>	—	—	—	—	—
1½	6	—	—	—	<b>HC1060</b>	<b>HC1061</b>	<b>HC1062</b>	<b>HC1063</b>	<b>HC1064</b>	—
2	6	—	—	—	<b>HC1065</b>	<b>HC1066</b>	<b>HC1067</b>	<b>HC1068</b>	<b>HC1069</b>	—
2	7	—	—	—	—	—	—	—	<b>HC1070</b>	<b>HC1071</b>
2½	7	—	—	—	—	—	—	—	<b>HC1076</b>	<b>HC1077</b>
3	7	—	—	—	—	—	—	—	<b>HC1086</b>	<b>HC1087</b>

Note: \*Must add prefix, see Note 1; suffix, see Note 2, on page V-86.  
 ‡F5 and larger will not be color coded.

## 3 Conductors

Cord Type	SVO, SV, SVT			SJ, SJO, SJT, SJTO			S, SO, ST, STO			
Cord Size	#6	#4	#3	#2	#1	#1/0	#2/0	#3/0	#4/0	#250
Approx. Dia. Inches (mm)	1.00" (25.4)	1.17" (29.7)	1.24" (31.5)	1.34" (34.0)	1.51" (38.4)	1.65" (41.9)	1.75" (44.5)	1.80" (48.0)	2.07" (52.6)	2.39" (60.7)
Color	Gray‡	‡	‡	‡	‡	‡	‡	‡	‡	‡
NPT	Form	Catalog Number*								
¼	1	—	—	—	—	—	—	—	—	—
¾	1	—	—	—	—	—	—	—	—	—
½	1	—	—	—	—	—	—	—	—	—
½	2	—	—	—	—	—	—	—	—	—
½	3	—	—	—	—	—	—	—	—	—
¾	2	—	—	—	—	—	—	—	—	—
¾	3	—	—	—	—	—	—	—	—	—
1	4	<b>HC1044</b>	—	—	—	—	—	—	—	—
1	5	<b>HC1047</b>	<b>HC1048</b>	<b>HC1048</b>	<b>HC1049</b>	—	—	—	—	—
1¼	5	<b>HC1052</b>	<b>HC1053</b>	<b>HC1053</b>	<b>HC1054</b>	—	—	—	—	—
1½	5	<b>HC1057</b>	<b>HC1058</b>	<b>HC1058</b>	<b>HC1059</b>	—	—	—	—	—
1½	6	—	—	—	<b>HC1060</b>	<b>HC1062</b>	<b>HC1063</b>	<b>HC1064</b>	—	—
2	6	—	—	—	<b>HC1065</b>	<b>HC1067</b>	<b>HC1068</b>	<b>HC1069</b>	—	—
2	7	—	—	—	—	—	—	<b>HC1070</b>	<b>HC1071</b>	<b>HC1073</b>
2½	7	—	—	—	—	—	—	<b>HC1076</b>	<b>HC1077</b>	<b>HC1079</b>
3	7	—	—	—	—	—	—	<b>HC1086</b>	<b>HC1087</b>	<b>HC1089</b>

Note: \*Must add prefix, see Note 1; suffix, see Note 2, on page V-86.  
 ‡F5 and larger will not be color coded.



## 4 Conductors

Cord Type	SJ, SJO, SJT, SJTO			S, SO, ST, STO					
Cord Size	#18	#16	#14	#18	#16	#14	#12	#10	#8
Approx. Dia. Inches (mm)	.36" (9.0)	.39" (9.8)	.43" (10.8)	.42" (10.7)	.45" (11.4)	.61" (15.5)	.70" (17.8)	.77" (19.4)	.97" (24.6)
Color	White	Blue	Blue	Blue	Blue	Brown	Yellow	Orchid	Gray‡
NPT	Form	Catalog Number*							
¼	1	<b>HC1005</b>	<b>HC1006</b>	<b>HC1006</b>	<b>HC1006</b>	—	—	—	—
¾	1	<b>HC1011</b>	<b>HC1012</b>	<b>HC1012</b>	<b>HC1012</b>	—	—	—	—
½	1	<b>HC1017</b>	<b>HC1018</b>	<b>HC1018</b>	<b>HC1018</b>	—	—	—	—
½	2	<b>HC1022</b>	<b>HC1023</b>	<b>HC1023</b>	<b>HC1023</b>	<b>HC1023</b>	<b>HC1024</b>	—	—
½	3	—	<b>HC1025</b>	<b>HC1025</b>	<b>HC1025</b>	<b>HC1025</b>	<b>HC1026</b>	<b>HC1027</b>	<b>HC1028</b>
¾	2	—	<b>HC1033</b>	<b>HC1033</b>	<b>HC1033</b>	<b>HC1033</b>	<b>HC1034</b>	—	—
¾	3	—	<b>HC1035</b>	<b>HC1035</b>	<b>HC1035</b>	<b>HC1035</b>	<b>HC1036</b>	<b>HC1037</b>	<b>HC1038</b>
1	4	—	<b>HC1039</b>	<b>HC1039</b>	<b>HC1039</b>	<b>HC1039</b>	<b>HC1040</b>	<b>HC1041</b>	<b>HC1042</b>
1	5	—	—	—	—	—	—	—	<b>HC1046</b>
1¼	5	—	—	—	—	—	—	—	<b>HC1051</b>
1½	5	—	—	—	—	—	—	—	<b>HC1056</b>
1½	6	—	—	—	—	—	—	—	—
2	6	—	—	—	—	—	—	—	—
2	7	—	—	—	—	—	—	—	—
2½	7	—	—	—	—	—	—	—	—
3	7	—	—	—	—	—	—	—	—

Note: \*Must add prefix, see Note 1; suffix, see Note 2, on page V-86.  
‡F5 and larger will not be color coded.

## 5 Conductors

Cord Type	S, SO, ST, STO						
Cord Size	#18	#16	#14	#12	#10	#8	#6
Approx. Dia. Inches (mm)	.50" (12.7)	.54" (13.7)	.70" (17.7)	.76" (19.3)	.83" (21.1)	1.06" (26.9)	1.18" (30.0)
Color	Blue	Brown	Yellow	Orchid‡	Orchid‡	Pink‡	‡
NPT	Form	Catalog Number*					
½	2	<b>HC1023</b>	<b>HC1024</b>	—	—	—	—
½	3	<b>HC1025</b>	<b>HC1026</b>	<b>HC1027</b>	<b>HC1028</b>	<b>HC1028</b>	—
¾	2	<b>HC1033</b>	<b>HC1034</b>	—	—	—	—
¾	3	<b>HC1035</b>	<b>HC1036</b>	<b>HC1037</b>	<b>HC1038</b>	<b>HC1038</b>	—
1	4	<b>HC1039</b>	<b>HC1040</b>	<b>HC1041</b>	<b>HC1042</b>	<b>HC1042</b>	<b>HC1044</b>
1	5	—	—	—	<b>HC1045</b>	<b>HC1045</b>	<b>HC1047</b>
1¼	5	—	—	—	<b>HC1050</b>	<b>HC1050</b>	<b>HC1052</b>
1½	5	—	—	—	<b>HC1055</b>	<b>HC1055</b>	<b>HC1057</b>

Note: \*Must add prefix, see Note 1; suffix, see Note 2, on page V-86.  
‡F5 and larger will not be color coded.



## 4 Conductors

Cord Type	SJ, SJO, SJT, SJTO			S, SO, ST, STO						
Cord Size	#6	#4	#3	#2	#1	#1/0	#2/0	#3/0	#4/0	
Approx. Dia. Inches (mm)	.94" (23.8)	1.08" (27.4)	1.17" (29.7)	1.27" (33.3)	1.44" (36.6)	1.52" (38.6)	1.65" (41.9)	1.77" (45.0)	1.92" (48.8)	
Color	Pink‡	‡	‡	‡	‡	‡	‡	‡	‡	
NPT	Form	Catalog Number*								
¼	1	—	—	—	—	—	—	—	—	—
¾	1	—	—	—	—	—	—	—	—	—
½	1	—	—	—	—	—	—	—	—	—
½	2	—	—	—	—	—	—	—	—	—
½	3	—	—	—	—	—	—	—	—	—
¾	2	—	—	—	—	—	—	—	—	—
¾	3	—	—	—	—	—	—	—	—	—
1	4	<b>HC1044</b>	—	—	—	—	—	—	—	—
1	5	<b>HC1047</b>	<b>HC1049</b>	<b>HC1049</b>	—	—	—	—	—	—
1¼	5	<b>HC1052</b>	<b>HC1054</b>	<b>HC1054</b>	—	—	—	—	—	—
1½	5	<b>HC1057</b>	<b>HC1059</b>	<b>HC1059</b>	—	—	—	—	—	—
1½	6	—	<b>HC1060</b>	<b>HC1060</b>	<b>HC1061</b>	<b>HC1063</b>	<b>HC1064</b>	—	—	—
2	6	—	<b>HC1064</b>	<b>HC1065</b>	<b>HC1066</b>	<b>HC1068</b>	<b>HC1069</b>	—	—	—
2	7	‡	—	—	—	—	<b>HC1070</b>	<b>HC1071</b>	<b>HC1073</b>	<b>HC1074</b>
2½	7	—	—	—	—	—	<b>HC1076</b>	<b>HC1077</b>	<b>HC1079</b>	<b>HC1080</b>
3	7	—	—	—	—	—	<b>HC1086</b>	<b>HC1087</b>	<b>HC1089</b>	<b>HC1090</b>

Note: \*Must add prefix, see Note 1; suffix, see Note 2, below.  
 ‡F5 and larger will not be color coded.

### Note:

- Add the proper prefix to the HC number to identify the type of connector desired:  
 SHC = Straight Hubbell Connector  
 NHC = 90° Hubbell Connector  
 FHC = Female Hubbell Connector  
 VHC = 45° Hubbell Connector
- Add the proper suffix to identify material desired:  
 Aluminum = No suffix  
 Zinc-Plated Steel = ZP  
 Corrosion Resistant Nylon = CR  
 Stainless Steel = SS


- This chart is a general guide to assist in the selection of Hubbell Cord Connectors for various cord sizes. The Hubbell Cord Connector catalog numbers selected, have been inserted into spaces which in our judgment represent the best cord connector which will fit the listed cord size. The diameters of the cords are approximate and may vary depending on the manufacturer. It is suggested that the appropriate cord manufacturer's dimension chart be consulted for exact dimensions.
- Cable jacket may have to be stripped to allow conductors to pass through connector body.



## NPT Thread Locknuts

### Zinc-Plated Steel


NPT Hub Size	A Inside Diameter Inches	B Outside Dia. Inches (mm)	C Thickness Inches (mm)	Steel Catalog Number
½	½"-14	1.14" (29.0)	.09" (2.3)	<b>00322001LPK50</b>
¾	¾"-14	1.43" (36.3)	.11" (2.8)	<b>00322002LPK50</b>
1	1"-11½	1.77" (45.0)	.13" (3.3)	<b>00322003LPK50</b>
1¼	1¼"-11½	2.28" (57.9)	.13" (3.3)	<b>00322004LPK50</b>
1½	1½"-11½	2.60" (66.0)	.13" (3.3)	<b>00322005LPK50</b>

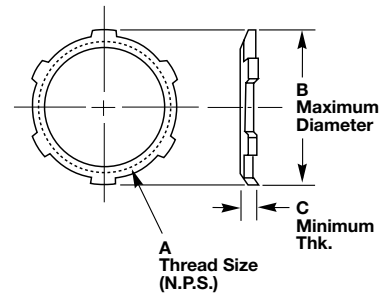

## Metal Clad Sealing O-Rings – Sizes ½ - 4

### Zinc-Plated Steel with Neoprene Ring

NPT Hub Size	A Inside Diameter Inches (mm)	B Outside Dia. Inches (mm)	C Thickness Inches (mm)	Catalog Number
½	.80" (20.3)	1.08" (27.4)	.16" (3.2)	<b>20509001</b>
¾	1.00" (25.4)	1.34" (34.0)	.16" (3.2)	<b>20509002</b>
1	1.25" (31.6)	1.63" (41.4)	.16" (3.2)	<b>20509003</b>
1¼	1.61" (40.9)	2.00" (50.8)	.16" (3.2)	<b>20509004</b>
1½	1.84" (46.7)	2.36" (59.9)	.16" (3.2)	<b>20509005</b>
2	2.31" (58.7)	2.83" (71.9)	.16" (3.2)	<b>20509006</b>

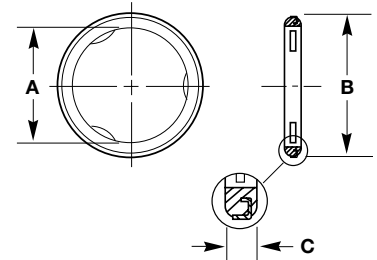


### Chrome Plated Steel with Neoprene Ring

2½	2.91" (73.9)	3.44" (87.4)	.24" (6.1)	<b>20509007</b>
3	3.52" (89.4)	4.08" (103.6)	.24" (6.1)	<b>20509008</b>

## Nylon PG Thread Locknuts

PG Thread Size	A Inches (mm)	B Inches (mm)	C Inches (mm)	Catalog Number
PG7	.75" (19.1)	.80" (20.3)	.22" (5.6)	<b>LNP7BPK100</b>
PG9	.86" (21.8)	.91" (23.2)	.22" (5.6)	<b>LNP9BPK100</b>
PG11	.94" (23.9)	1.03" (26.2)	.22" (5.6)	<b>LNP11BPK100</b>
PG13.5	1.06" (26.9)	1.14" (29.0)	.24" (6.1)	<b>LNP13BPK100</b>
PG16	1.18" (30.0)	1.30" (33.0)	.25" (6.1)	<b>LNP16BPK100</b>
PG21	1.41" (35.8)	1.54" (39.1)	.25" (6.1)	<b>LNP21BPK100</b>
PG29	1.81" (46.0)	2.00" (50.8)	.25" (6.1)	<b>LNP29BPK25</b>
PG36	2.24" (56.9)	2.50" (63.5)	.25" (6.1)	<b>LNP36BPK25</b>



## Nylon Metric Thread Locknuts

PG Thread Size	A Inches (mm)	B Inches (mm)	C Inches (mm)	Catalog Number
M12	.75" (19.1)	.82" (20.8)	.22" (5.6)	<b>LNM12BPK100</b>
M16	.87" (22.09)	.98" (25.0)	.22" (5.6)	<b>LNM16BPK100</b>
M20	1.06" (27.0)	1.18" (30.0)	.25" (6.4)	<b>LNM20BPK100</b>
M25	1.38" (35.1)	1.54" (39.1)	.28" (7.1)	<b>LNM25BPK100</b>
M32	1.61" (40.9)	1.80" (45.7)	.28" (7.1)	<b>LNM32BPK100</b>
M40	1.97" (50.0)	2.18" (55.4)	.28" (7.1)	<b>LNM40BPK100</b>

Dimensions shown are approximate and are subject to change without notice.



## Hubbell Juniors®

<b>Material</b>	<b>Operating Temperature Range</b>
Nylon (connectors and GOTCHA® rings)	-40°F to +225°F (-40°C to +107°C)
Neoprene (bushings)	-30°F to +240°F (-34°C to +115°C)

Due to the limiting factors of nylon and neoprene, any complete liquidtight Hubbell Junior will continuously perform in the range of -30°F to +225°F (-34°C to +107°C).

Snap-In continuously performs -40°F to +225°F (-40°C to +107°C).

### Flammability

Hubbell Juniors have a UL 94V-2 rating.

### Certifications


<b>Product</b>	<b>Agency</b>
Liquidtight and Liquidtight with Spiral	UL Listed. CSA Certified.
Snap-In	UL Recognized. CSA Certified.

## Knockout Holes

<b>NPT Hub Size</b>	<b>Knockout Hole Recommended Min. to Max.</b>	
	<b>inches</b>	<b>(mm)</b>
¼	.54"-.57"	(13.7-14.5)
⅜	.67"-.70"	(17.0-17.8)
½	.86"-.91"	(21.8-23.1)


## Snap-In

Diameter Range Inches (mm)	For Chassis Thickness (Max.) Inches (mm)	Required Hole Size A Inches (mm)	B Inches (mm)	Dimensional Specifications					G Inches (mm)
				C Inches (mm)	D Inches (mm)	E Inches (mm)	F Inches (mm)		
.22"-.27" (5.6-6.9)	.10" (2.5)	.50" (12.7)	.45" (11.4)	.28" (7.1)	.28" (7.1)	.54" (13.7)	.12" (3.0)	1.84" (44.2)	
.28"-.32" (7.1-8.1)	.10" (2.5)	.50" (12.7)	.47" (11.9)	.28" (7.1)	.33" (8.4)	.59" (15.0)	.12" (3.0)	1.84" (44.2)	
.30"-.36" (7.6-9.1)	.13" (3.3)	.63" (16.0)	.55" (14.0)	.36" (9.1)	.37" (9.4)	.65" (16.5)	.14" (3.6)	2.18" (55.4)	
.32"-.43" (8.1-10.9)	.13" (3.3)	.75" (19.0)	.66" (16.8)	.45" (11.4)	.44" (11.2)	.75" (19.1)	.14" (3.6)	2.60" (66.0)	

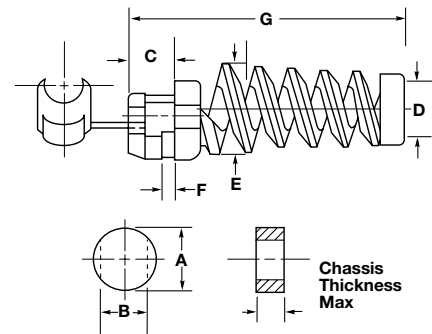


## Liquidtight

F NPT Inches	A Dia. Inches (mm)	B Ref. Inches (mm)	C Inches (mm)	D Throat Dia. Inches (mm)	E	
					Across Corners Inches (mm)	Across Flats Inches (mm)
¼-18	.65" (16.5)	1.30" (33.0)	.40" (10.2)	.29" (7.4)	.65" (16.5)	.60" (15.2)
⅜-18	.81" (20.6)	1.44" (36.6)	.41" (10.4)	.36" (9.1)	.81" (20.6)	.75" (19.1)
½-14	1.00" (25.4)	1.56" (39.6)	.46" (11.7)	.45" (11.4)	.99" (25.1)	.92" (23.4)

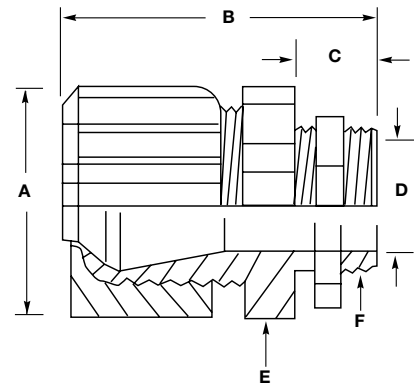

## Liquidtight with Spiral

G NPT Inches	A Dia. Inches (mm)	B Ref. Inches (mm)	C Inches (mm)	D Throat Dia. Inches (mm)	E Inches (mm)	F	
						Across Corners Inches (mm)	Across Flats Inches (mm)
¼-18	.65" (16.5)	2.55" (64.8)	.40" (10.2)	.29" (7.4)	.27" (6.9)	.65" (16.5)	.60" (15.2)
⅜-18	.81" (20.6)	3.10" (78.7)	.41" (10.4)	.36" (9.1)	.35" (8.9)	.81" (20.6)	.75" (19.1)
½-14	1.00" (25.4)	3.72" (94.5)	.46" (11.7)	.45" (11.4)	.45" (11.4)	.99" (25.1)	.92" (23.4)

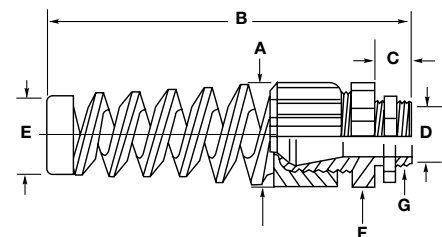

Dimensions shown are approximate and are subject to change without notice.





## Features and Benefits

### PolyTuff® I and PolyTuff® II Non-Metallic Liquidtight Conduit

All non-metallic construction ends fatigue and separation problems. They can be cut cleanly with a knife or PVC cutter so there are no jagged metal edges.



#### PolyTuff® I Conduit, Gray

- Rigid PVC core bonded to flexible PVC jacket
- Approved for outdoor use and direct burial
- UL Listed and CSA Certified



#### PolyTuff® II Tubing, Black

- PVC core with corrugated walls bonded to PVC jacket
- Handles twists, turns, bends, switchbacks and straightaways with ease
- UL Recognized and CSA Certified

### PolyTuff® I Conduit

**IP66**  
SUITABILITY



Trade Size (metric designator)	Feet (m)	Catalog Number
3/8 (12)	100 (30.5)	<b>G1038</b>
1/2 (16)	100 (30.5)	<b>G1050</b>
3/4 (21)	100 (30.5)	<b>G1075</b>
1 (27)	100 (30.5)	<b>G1100</b>
1 1/4 (35)	100 (30.5)	<b>G1125</b>
1 1/2 (41)	50 (15.2)	<b>G1150</b>
2 (53)	50 (15.2)	<b>G1200</b>

Note: See pages V-58 and V-59, V-90 and V-91 for approved fittings.  
See pages V-92 and V-93 for technical information and dimensional drawings.



### PolyTuff® II Tubing

**IP66**  
SUITABILITY



Trade Size (metric designator)	Feet (m)	Catalog Number
1/4 (10)	100 (30.5)	<b>B2025</b>
3/8 (12)	100 (30.5)	<b>B2038</b>
1/2 (16)	100 (30.5)	<b>B2050</b>
3/4 (21)	100 (30.5)	<b>B2075</b>
1 (27)	100 (30.5)	<b>B2100</b>
1 1/4 (35)	100 (30.5)	<b>B2125</b>
1 1/2 (41)	50 (15.2)	<b>B2150</b>
2 (53)	50 (15.2)	<b>B2200</b>

Note: See page V-90 for approved fittings.  
See pages V-92 and V-93 for technical information and dimensional drawings.



## PolyTuff® Non-Metallic Liquidtight Fittings



P075NBKA



P075NGYA

### Straight with Male Non-Metallic Liquidtight Fittings

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¼ (10)	<b>F2025</b>	—
⅜ (12)	<b>P038NBKA</b>	<b>P038NGYA</b>
½ (16)	<b>P050NBKA</b>	<b>P050NGYA</b>
¾ (21)	<b>P075NBKA</b>	<b>P075NGYA</b>
1 (27)	<b>P100NBKA</b>	<b>P100NGYA</b>
1¼ (35)	<b>P125NBK</b>	<b>P125NGY</b>
1½ (41)	<b>P150NBK</b>	<b>P150NGY</b>
2 (53)	<b>P200NBK</b>	<b>P200NGY</b>

Note: Fittings are to be used with PolyTuff I and PolyTuff II.  
See pages V-94 and V-95 for technical information and dimensional drawings.  
¾" Liquidtight conduit fitting have ½ NPT male threads.



PS0509NGY

SwivelLok® Multi-Position

### SwivelLok® Multi-Position with Male Non-Metallic Liquidtight Fittings

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¾ (12)	<b>PS0389NBK</b>	<b>PS0389NGY</b>
½ (16)	<b>PS0509NBK</b>	<b>PS0509NGY</b>
¾ (21)	<b>PS0759NBK</b>	<b>PS0759NGY</b>
1 (27)	<b>PS1009NBK</b>	<b>PS1009NGY</b>

Note: Fittings are to be used with PolyTuff I and PolyTuff II.  
See pages V-94 and V-95 for technical information and dimensional drawings.  
¾" Liquidtight conduit fitting have ½ NPT male threads.



P0759NBK



P0759NGY

### Fixed 90° Fittings for Non-Metallic Conduit

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¾ (12)	<b>P0389NBK</b>	<b>P0389NGY</b>
½ (16)	<b>P0509NBK</b>	<b>P0509NGY</b>
¾ (21)	<b>P0759NBK</b>	<b>P0759NGY</b>
1 (27)	<b>P1009NBK</b>	<b>P1009NGY</b>
1¼ (35)	<b>P1259NBK</b>	<b>P1259NGY</b>

Note: Fittings are to be used with PolyTuff I and PolyTuff II.  
See pages V-94 and V-95 for technical information and dimensional drawings.  
¾" Liquidtight conduit fitting have ½ NPT male threads.



PS05GYKIT

### SwivelLok® Flexible Conduit Kit

Trade Size (metric designator)	Fitting and Conduit	Catalog Number
½ (16)	2 PS0509NGY, 6' G1050	<b>PS05GYKIT</b>
¾ (21)	2 PS0759NGY, 6' G1075	<b>PS07GYKIT</b>

Note: See pages V-94 and V-95 for technical information and dimensional drawings.

## Metallic Liquidtight Conduit Fittings

### Straight Conduit Fitting

Trade Size (metric designator)	Insulated	Non-Insulated
3/8 (12)	<b>H0381</b>	<b>H038</b>
1/2 (16)	<b>H0501</b>	<b>H050</b>
3/4 (21)	<b>H0751</b>	<b>H075</b>
1 (27)	<b>H1001</b>	<b>H100</b>
1 1/4 (35)	<b>H1251</b>	<b>H125</b>
1 1/2 (41)	<b>H1501</b>	<b>H150</b>
2 (53)	<b>H2001</b>	<b>H200</b>
2 1/2 (63)	<b>H2501</b>	<b>H250</b>
3 (78)	<b>H3001</b>	<b>H300</b>
3 1/2 (91)	<b>H3501</b>	<b>H350</b>
4 (103)	<b>H4001</b>	<b>H400</b>

Note: 3/8" Liquidtight conduit fitting have 1/2 NPT male threads.  
For use with Liquidtight Metal conduit and PolyTuff I Non-Metallic conduit.  
See page V-96 for technical information.



### 45° Conduit Fitting

Trade Size (metric designator)	Insulated	Non-Insulated
3/8 (12)	<b>H03841</b>	<b>H0384</b>
1/2 (16)	<b>H05041</b>	<b>H0504</b>
3/4 (21)	<b>H07541</b>	<b>H0754</b>
1 (27)	<b>H10041</b>	<b>H1004</b>
1 1/4 (35)	<b>H12541</b>	<b>H1254</b>
1 1/2 (41)	<b>H15041</b>	<b>H1504</b>
2 (53)	<b>H20041</b>	<b>H2004</b>

Note: 3/8" Liquidtight conduit fitting have 1/2 NPT male threads.  
For use with Liquidtight Metal conduit and PolyTuff I Non-Metallic conduit.  
See page V-96 for technical information.



### 90° Conduit Fitting

Trade Size (metric designator)	Insulated	Non-Insulated
3/8 (12)	<b>H03891</b>	<b>H0389</b>
1/2 (16)	<b>H05091</b>	<b>H0509</b>
3/4 (21)	<b>H07591</b>	<b>H0759</b>
1 (27)	<b>H10091</b>	<b>H1009</b>
1 1/4 (35)	<b>H12591</b>	<b>H1259</b>
1 1/2 (41)	<b>H15091</b>	<b>H1509</b>
2 (53)	<b>H20091</b>	<b>H2009</b>
2 1/2 (63)	<b>H25091</b>	<b>H2509</b>
3 (78)	<b>H30091</b>	<b>H3009</b>
4 (103)	<b>H40091</b>	<b>H4009</b>

Note: 3/8" Liquidtight conduit fitting have 1/2 NPT male threads.  
For use with Liquidtight Metal conduit and PolyTuff I Non-Metallic conduit.  
See page V-96 for technical information.





## PolyTuff® I Conduit

### Operating Temperature Range

Wet environment	0°F to +140°F (-18°C to +60°C).
Oil environment	0°F to +158°F (-18°C to +70°C).
Dry environment	0°F to +176°F (-18°C to +80°C).

### Certifications

UL Listed CSA Certified	UL Standard 1660. Sunlight resistant approved for outdoor use, direct burial. Meets requirements of NEC.
----------------------------	---

### Voltage Rating

Maximum	600V.
---------	-------

### Material

Conduit	Co-extruded rigid and flexible PVC.
---------	-------------------------------------

## PolyTuff® II Tubing

### Operating Temperature Range

Operating environment	0°F to +140°F (-18°C to +60°C).
-----------------------	---------------------------------

### Certifications

UL Recognized CSA Certified	
--------------------------------	--

### Voltage Rating

Maximum	Same as wire insulation rating.
---------	---------------------------------

### Material

Tubing	Co-extruded rigid and flexible PVC.
--------	-------------------------------------

## PolyTuff® I Conduit

Trade Size (metric designator)	Conduit ID/OD		Bend Radius	
	Inches	(mm)	Inches	(mm)
¾ (12)	.49"/.70"	(12.6/17.8)	2.00"	(50.8)
½ (16)	.63"/.83"	(16.1/21.1)	3.00"	(76.2)
¾ (21)	.83"/1.04"	(21.1/26.4)	4.00"	(101.6)
1 (27)	1.05"/1.30"	(26.0/33.1)	5.00"	(127.0)
1¼ (35)	1.40"/1.65"	(35.4/41.8)	6.30"	(158.8)
1½ (41)	1.59"/1.88"	(40.3/47.8)	7.50"	(190.5)
2 (53)	2.03"/2.36"	(51.6/59.9)	10.00"	(254.0)

## PolyTuff® II Tubing

Trade Size (metric designator)	Conduit ID/OD		Bend Radius	
	Inches	(mm)	Inches	(mm)
¼ (10)	.36"/.57"	(9.3/14.5)	1.50"	(38.1)
¾ (12)	.49"/.70"	(12.6/17.8)	2.00"	(50.8)
½ (16)	.63"/.83"	(16.1/21.1)	2.00"	(50.8)
¾ (21)	.83"/1.04"	(21.1/26.4)	3.00"	(76.2)
1 (27)	1.05"/1.30"	(26.0/33.1)	3.00"	(76.2)
1¼ (35)	1.40"/1.65"	(35.4/41.8)	5.00"	(127.0)
1½ (41)	1.59"/1.88"	(40.3/47.8)	5.00"	(127.0)
2 (53)	2.03"/2.36"	(51.6/59.9)	5.00"	(127.0)



## PolyTuff® I and II Conduit/Tubing; PVC Chemical Resistance

Chemical	Conc.*	Temp.		Chemical	Conc.*	Temp.		Chemical	Conc.*	Temp.	
		70°F 21°C	150°F 66°C			70°F 21°C	150°F 66°C			70°F 21°C	150°F 66°C
Acetate Solvents		D	D	Coconut Oil		C	D	Lubricating Oils		A	A
Acetic Acid		B	C	Corn Oil		A	B	Magnesium Chloride		A	A
Acetic Acid (Glacial)		C	D	Cottonseed Oil		C	D	Magnesium Hydroxide		A	A
Acetone		D	D	Creosote		D	D	Magnesium Sulfate		A	A
Acrylonitrile		A	B	Cresol		C	D	Malathion 50 in Aromatics		D	D
Alcohols (Aliphatic)		C	C	Crysylic Acid		D	D	Malic Acid		A	A
Aluminum Chloride		A	A	Cyclohexane		B	C	Methyl Acetate		D	D
Aluminum Sulfate (Alums)		A	A	DDT Weed Killer		A	C	Methyl Alcohol		C	C
Ammonia (Anhydrous Liquids)		D	D	Dibutyl Phthalate		D	D	Methyl Bromide		D	D
Ammonia (Aqueous)		A	A	Diesel Oils		C	D	Methyl Ethyl Ketone		D	D
Ammoniated Latex		A	C	Diethylene Glycol		B	C	Methylene Chloride		D	D
Ammonium Chloride		A	A	Diethyl Ether		A	C	Mineral Oil			
Ammonium Hydroxide		A	A	Di-isodecyl Phthalate		D	D	Monochlorobenzene		A	A
Amyl Acetate		D	D	Diocetyl Phthalate		D	D	Muriatic Acid (see Hydrochloric Acid)			
Aniline Oils		D	D	Dow General Weed Killer (Phenol)		D	D	Naphtha		C	D
Aromatic Hydrocarbons		D	D	Dow General Weed Killer (H2O)		B	C	Naphthalene		D	D
Asphalt		D	D	Ethyl Alcohol		C	C	Nitric Acid	10%	A	B
ASTM Fuel A		C	C	Ethylene Dichloride		D	D	Nitric Acid	35%	A	C
ASTM Fuel B		D	D	Ethylene Glycol		B	C	Nitric Acid	70%	D	D
ASTM #1 Oil		B	C	Ferric Chloride		A	A	Oleic Acid		A	C
ASTM #3 Oil		C	D	Ferric Sulfate		A	A	Oleum		D	D
Barium Chloride		A	A	Ferrous Chloride		A	A	Oxalic Acid		A	A
Barium Sulfide		A	A	Ferrous Sulfate		A	A	Pentachlorophenol in Oil		B	C
Barium Hydroxide		A	A	Formaldehyde		D	D	Pentane		C	D
Benzene (Benzol)		D	D	Fuel Oil		B	C	Perchloroethylene		B	C
Benzine (Petroleum Ether)		C	C	Furfural		C	C	Petroleum Ether		C	C
Black Liquor		A	A	Gallic Acid		A	A	Phenol		A	A
Bordeaux Mixture		A	A	Gasoline (Hi Test)		C	D	Phosphoric Acid	10%	A	A
Boric Acid		A	A	Glycerine		A	A	Pitch	50%	A	B
Butyl Acetate		D	D	Grease		A	C	Potassium Hydroxide		C	D
Butyl Alcohol		B	C	Green Sulfate Liquor		A	A	Sodium Cyanide		A	A
Calcium Hydroxide		A	A	Heptachlor in Petroleum Solvents		A	C	Stoddard Solvent		D	D
Calcium Hypochlorite		A	A	Heptane		C	D	Styrene		D	D
Carbolic Acid (Phenol)		B	C	Hexane		C	D	Sulfur Dioxide (liquid)		D	D
Carbon Dioxide		A	A	Hydrobromic Acid		A	A	Sulfuric Acid	50%	A	B
Carbon Disulfide		D	D	Hydrochloric Acid	10%	A	A	Sulfuric Acid	98%	D	D
Carbon Tetrachloride		D	D	Hydrochloric Acid	40%	C	C	Sulfurous Acid		B	C
Carbonic Acid		A	A	Hydrofluoric Acid	70%	D	D	Tall Oil		D	D
Casein		A	C	Hydrofluorosilicic Acid		A	A	Tannic Acid		A	A
Caustic Soda		A	B	Hydrofluorosilicic Acid	10%	A	A	Toluene		D	D
Chlorine Gas (wet)		D	D	Hydrogen Peroxide		A	B	Trichlorethylene		D	D
Chlorine Gas (dry)		D	D	Iso-Octane		C	C	Triethanol Amine		C	D
Chlorine (water solution)		C	D	Isopropyl Acetate		D	D	Tricresyl Phosphate (Skydrol)		D	D
Chlorobenzene		D	D	Isopropyl Acid		B	C	Turpentine		C	D
Chlorinated Hydrocarbons		D	D	Jet Fuels (JP-3, and 5)		C	D	Vinegar		A	B
Chromic Acid		B	C	Kerosene		C	C	Vinyl Chloride		D	D
Citric Acid		A	A	Ketones		D	D	Water		A	A
Coal Tar		D	D	Linseed Oil		A	A	White Liquor		A	A
								Xylene		D	D
								Zinc Chloride		A	A
								Zinc Sulfate		A	A

Note: \*Conc. = Concentration.

(All ratings apply to concentrated or saturated solutions unless otherwise specified.)

Chemical resistance ratings are based upon information supplied by the raw material manufacturers.

Use as a general guide only – samples should be tested by user under actual conditions.

### Rating Code

#### A-Excellent service

No harmful effect to reduce service life. Suitable for continuous service.

#### B-Good service life.

Moderate to minor effect. Good for intermittent service. Generally suitable for continuous service.

#### C-Fair or limited service.

Depends on operating conditions. Generally suitable for intermittent service. Not recommended for continuous service.

#### D-Unsatisfactory service.

Not recommended.



## PolyTuff® Fittings

### Operating Temperature\*

Nylon (Body, Nut, Gripping Ring and Locknut)	-40°F to +225°F (-40°C to +107°C).
Neoprene (Sealing Ring)	-30°F to +240°F (-34°C to +116°C).

### Flammability

Fire Gas Toxicity Product Testing	Nylon PolyTuff Fittings have a UL 94V-2 rating.
-----------------------------------	---

### Certifications

UL Listed	UL50 Type 4X, 12 and 13.
CSA Certified	PolyTuff I Fittings, PolyTuff II Fittings.

## Liquidtight Fittings

### Operating Temperature\*\*

Steel/Malleable Iron (Nut, Body, Ferrule)	-60°F to +1000°F (-51°C to +538°C).
Nylon (Gland Ring)	-40°F to +225°F (-40°C to +107°C).

### Hazardous Locations - NEC Reference

Class I, Div. 2 - 501-10(A)(3)B
Class II, Div. 1 - 502-10(A)(2)
Class II, Div. 2 - 502-10(A)(3)
Class III, Div. 1 - 503-10(A)(2)
Class III, Div. 2 - 503-10(B)

### Certifications

UL Listed to UL 514B
CSA Certified


Note: \*Due to the limiting factors of nylon and neoprene, PolyTuff Fittings will continuously perform in the range -30°F to +225°F (-34°C to +107°C).

\*\*Due to the limiting factors of nylon, metallic liquidtight flexible conduit fittings will continuously perform in the range of -40°F to +225°F (-40°C to +107°C).




## Straight with Male Non-Metallic Liquidtight Fittings

Trade Size (md**)	A	B	C	D Throat Dia.	E	
					Across Corners	Across Flats
¼ (10)	.93" (23.6)	1.45" (36.8)	.39" (9.9)	.32" (8.1)	.86" (Dia.) (21.8)	
⅜ (12)	1.14" (29.0)	1.63" (41.4)	.57" (14.5)	.42" (10.7)	1.41" (35.8)	1.30" (33.0)
½ (16)	1.30" (33.0)	2.14" (54.4)	.57" (14.5)	.55" (14.0)	1.41" (35.8)	1.30" (33.0)
¾ (21)	1.53" (38.9)	2.22" (56.4)	.58" (14.7)	.74" (18.8)	1.85" (47.0)	1.53" (38.9)
1 (27)	1.80" (45.7)	2.32" (58.9)	.72" (18.3)	.96" (24.4)	1.94" (49.3)	1.80" (45.7)
1¼ (35)	2.20" (55.9)	2.15" (54.6)	.74" (18.8)	1.30" (33.0)	2.38" (60.5)	2.18" (55.4)
1½ (41)	2.49" (63.2)	2.35" (59.7)	.76" (19.3)	1.46" (37.1)	2.63" (66.8)	2.43" (61.7)
2 (53)	3.05" (77.4)	2.51" (63.6)	.79" (20.1)	1.90" (48.3)	3.13" (79.5)	2.93" (74.4)



## 90° with Male Non-Metallic Liquidtight Fittings





Trade Size (md**)	A	B	C	D Throat Dia.	E	
					Across Corners	Across Flats
¼ (10)	.93" (23.6)	1.88" (47.8)	.39" (9.9)	.32" (8.1)	.86" (Dia.) (21.8)	
1¼ (35)	2.21" (56.1)	3.57" (90.7)	.74" (18.9)	1.30" (33.0)	2.38" (60.5)	2.18" (55.4)



## SwivelLok® Multi-Position Liquidtight Fittings


Trade Size (md**)	A	B	C	D	E	F	G	
							Across Corners	Across Flats
⅜ (12)	1.30" (33.0)	3.27" (83.1)	.57" (14.5)	.55" (14.0)	1.43" (36.3)	2.00" (50.8)	1.41" (35.8)	1.30" (33.0)
½ (16)	1.30" (33.0)	3.27" (83.1)	.57" (14.5)	.55" (14.0)	1.43" (36.3)	2.00" (50.8)	1.41" (35.8)	1.30" (33.0)
¾ (21)	1.53" (38.9)	3.66" (93.0)	.58" (15.7)	.74" (18.8)	1.59" (40.4)	2.23" (56.6)	1.65" (41.9)	1.53" (38.9)
1 (27)	1.80" (45.7)	4.00" (101.6)	.72" (18.3)	.96" (24.4)	1.84" (46.7)	2.30" (58.4)	1.94" (49.3)	1.80" (45.7)

Note: \*A/C = Across Corners, A/F = Across Flats.  
 \*\*md = metric designator.

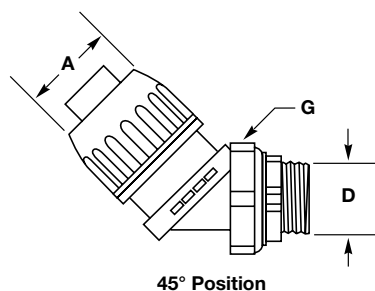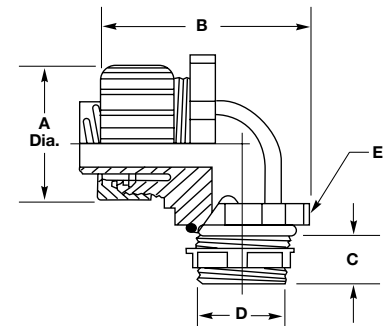




## Straight with Male Metallic Metal Fitting




Trade Size (md**)	A Ref.	B	C		D Throat Dia.	E	
			A/C*	A/F*		A/C*	A/F*
3/8 (12)	1.43" (36.3)	.59" (15.0)	1.20" (30.0)	1.06" (26.9)	.61" (15.5)	1.07" (27.2)	.93" (23.6)
1/2 (16)	1.43" (36.3)	.59" (15.0)	1.34" (34.0)	1.19" (30.2)	.61" (15.5)	1.22" (31.0)	1.06" (26.9)
3/4 (21)	1.56" (39.6)	.59" (15.0)	1.55" (39.0)	1.37" (34.8)	.84" (21.3)	1.43" (36.3)	1.25" (31.8)
1 (27)	1.68" (42.7)	.66" (16.8)	1.95" (50.0)	1.69" (42.9)	1.06" (26.9)	1.73" (43.9)	1.56" (39.6)
1 1/4 (35)	2.03" (51.6)	.63" (16.8)	2.39" (61.0)	2.06" (52.3)	1.37" (34.8)	2.36" (59.9)	2.08" (52.8)
1 1/2 (41)	2.21" (56.1)	.63" (16.8)	2.72" (69.0)	2.38" (60.5)	1.53" (38.9)	2.79" (70.9)	2.48" (63.0)
2 (53)	2.28" (57.9)	.69" (17.5)	3.08" (78.0)	2.87" (72.9)	2.06" (52.3)	3.32" (84.3)	2.90" (73.7)
2 1/2 (63)	3.56" (90.4)	1.06" (26.9)	3.92" (100.0)	3.62" (91.9)	2.42" (61.5)	3.85" (97.8)	3.60" (91.4)
3 (78)	3.81" (96.8)	1.06" (26.9)	4.70" (119.0)	4.31" (109.5)	3.01" (76.5)	4.65" (118.1)	4.33" (110.0)
3 1/2 (91)	3.81" (96.8)	1.06" (26.9)	5.29" (134.0)	4.81" (122.2)	3.49" (88.6)	5.18" (131.6)	4.82" (122.4)
4 (103)	3.81" (96.8)	1.06" (26.9)	5.75" (146.0)	5.31" (134.9)	3.96" (100.6)	5.75" (146.1)	5.39" (136.9)

## 45° with Male Metallic Metal Fitting



Trade Size (md**)	A	B	C	D		E Throat Dia.	F	
				A/C*	A/F*		A/C*	A/F*
3/8 (12)	1.19" (30.2)	1.28" (32.5)	.59" (15.0)	1.20" (30.5)	1.06" (26.9)	.60" (15.2)	1.16" (29.5)	1.02" (25.9)
1/2 (16)	1.19" (30.2)	1.28" (32.5)	.59" (15.0)	1.34" (34.0)	1.19" (30.2)	.61" (15.2)	1.21" (30.7)	1.06" (26.9)
3/4 (21)	1.19" (30.2)	1.43" (36.3)	.59" (15.0)	1.55" (39.4)	1.45" (36.8)	.84" (21.3)	1.50" (38.1)	1.32" (33.5)
1 (27)	1.38" (35.1)	1.53" (38.9)	.66" (16.8)	1.95" (49.5)	1.69" (42.9)	1.05" (26.7)	1.82" (46.2)	1.59" (40.4)
1 1/4 (35)	1.42" (36.1)	1.69" (42.9)	.63" (16.0)	2.39" (60.7)	2.06" (52.3)	1.37" (34.8)	2.32" (58.9)	2.03" (51.6)
1 1/2 (41)	1.66" (42.2)	2.00" (50.8)	.66" (16.8)	2.72" (69.1)	2.38" (60.5)	1.60" (40.6)	2.62" (66.5)	2.29" (58.2)
2 (53)	1.69" (42.9)	2.25" (57.2)	.66" (16.8)	3.08" (78.2)	2.88" (73.2)	2.05" (52.1)	3.21" (81.5)	2.80" (71.1)

## 90° with Male Metallic Metal Fitting



Trade Size (md**)	A	B	C		D Ref.	E Throat Dia.	F	
			A/C*	A/F*			A/C*	A/F*
3/8 (12)	1.31" (33.3)	.59" (15.0)	1.20" (30.5)	1.06" (26.9)	1.44" (36.6)	.60" (15.2)	1.13" (29.0)	.99" (25.1)
1/2 (16)	1.31" (33.3)	.59" (15.0)	1.34" (34.0)	1.12" (28.4)	1.44" (36.6)	.61" (15.5)	1.12" (28.0)	1.00" (25.4)
3/4 (21)	1.44" (36.6)	.59" (15.0)	1.55" (39.4)	1.45" (36.8)	1.63" (41.4)	.83" (21.1)	1.48" (38.0)	1.29" (32.8)
1 (27)	1.78" (45.2)	.59" (15.0)	1.95" (49.5)	1.60" (40.6)	2.19" (55.6)	1.05" (26.7)	1.80" (46.0)	1.57" (39.9)
1 1/4 (35)	1.97" (50.0)	.63" (16.0)	2.39" (60.7)	2.06" (52.3)	2.50" (63.5)	1.36" (34.5)	2.32" (59.0)	2.02" (51.3)
1 1/2 (41)	2.19" (55.6)	.63" (16.0)	2.72" (69.1)	2.38" (60.5)	2.69" (68.3)	1.61" (40.9)	2.58" (66.0)	2.25" (57.2)
2" (53)	2.53" (64.3)	.66" (16.8)	3.08" (78.2)	2.87" (72.9)	3.25" (82.6)	2.05" (52.1)	3.14" (80.0)	2.75" (69.9)
2 1/2 (63)	3.44" (87.4)	1.00" (25.4)	3.92" (99.6)	3.63" (92.2)	4.25" (108.0)	2.42" (61.5)	3.78" (96.0)	3.50" (88.9)
3 (78)	3.75" (95.3)	1.00" (25.4)	4.70" (119.4)	4.31" (109.5)	4.87" (123.7)	3.01" (76.5)	4.64" (118.0)	4.30" (109.2)
4 (103)	4.25" (108.0)	1.00" (25.4)	5.75" (146.1)	5.31" (134.9)	5.63" (143.0)	3.96" (100.6)	5.76" (146.0)	5.38" (136.7)

Note: \*A/C = Across Corners, A/F = Across Flats.  
\*\*md = metric designator.