

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A

STAINLESS STEEL SUPPORT RINGS

F3 MAX-LOC NUT

STAINLESS STEEL SCREWS


SHROUDED KNOCK-OUT HOLE FOR OPTIONAL PILOT LIGHT OR HORN BUTTON

1.18 [30.0] REF. BETWEEN CENTERS

3.52 [89.4] REF.

2.31 [58.7] REF.

7.41 [188.2] REF.

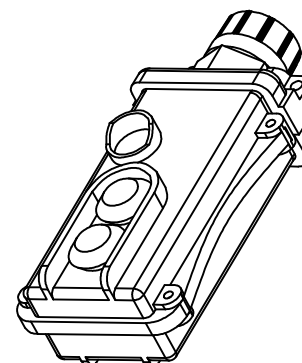

ORDER NO.	WOODHEAD NO.	SPEED SWITCHES
1301260246	5052-M*	N/A
1301260243	5052-1	1
1301260244	5052-2	2
1301260245	5052-3	3
1301260247	5052-N*	N/A

*M = WITH MOMENTARY ON/OFF SWITCHES
N = WITH MAINTAINED ON/OFF SWITCHES

NOTES:

- PENDANT HOUSING: POLYCARBONATE
- COMMON CIRCUIT IS PRE-WIRED ON ALL SWITCHES TO SIMPLIFY WIRING
- EASILY REMOVABLE BUTTON HOODS AND NAMEPLATES
- CORD DIAMETER: .375 TO .812 [9.53 TO 20.63]
- UL FILE NO.:E70531
- INSTALLATION INSTRUCTIONS, BUTTON ID, AND LABELS ARE PACKED WITH PART
- ALL BUTTONS ARE HIGH AMBIENT, CHEMICALLY RESISTANT MATERIAL

RELEASE SALES DRAWING EC NO: IPC2016-0371 DRWN: KCOX01 2015/09/09 CHKD: HKNEELAN 2015/09/09 APPR: JFMURPHY 2015/09/29	QUALITY SYMBOLS ▽=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY DATE	TITLE				
		4 PLACES	±---	±---	KCOX01 2015/09/09	2 POSITION WATERTITE PLASTIC PENDANT STATION				
		3 PLACES	±---	±.005	CHECKED BY DATE	MOLEX INCORPORATED				
			2 PLACES	±.13	±.010	APPROVED BY DATE	DOCUMENT NO.			
			1 PLACE	±.25	±.020	JFMURPHY 2015/09/29	SD-130126-073			
			ANGULAR ±1/2°		MATERIAL NO.		SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		1 OF 1			
A	REV			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				