

6

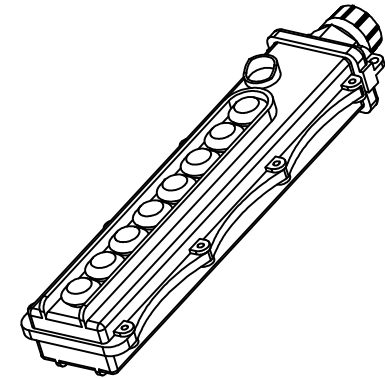
5

4

3

2

1

STAINLESS STEEL  
SUPPORT RINGSF3 MAX-LOC  
NUTSTAINLESS  
STEEL  
SCREWSSHROUDED  
KNOCK-OUT  
HOLE FOR  
OPTIONAL  
PILOT LIGHT  
OR HORN BUTTON14.50 [368.3]  
REF.1.18 [30.0]  
REF.  
BETWEEN  
CENTERS3.52 [89.4]  
REF.2.31 [58.7]  
REF.

ORDER NO.	WOODHEAD NO.	SPEED SWITCHES
1301260263	5058-1M*	1
1301260266	5058-2M*	2
1301260268	5058-3M*	3
1301260262	5058-1	1
1301260265	5058-2	2
-----	5058-3	3
1301260264	5058-1N*	1
1301260267	5058-2N*	2
1301260269	5058-3N*	3

\*M = WITH MOMENTARY ON/OFF SWITCHES  
N = WITH MAINTAINED ON/OFF SWITCHES

## NOTES:

- PENDANT HOUSING: POLYCARBONATE
- COMMON CIRCUIT IS PRE-WIRED ON ALL SWITCHES TO SIMPLIFY WIRING
- EASILY REMOVABLE BUTTON HOODS AND NAMEPLATES
- CORD DIAMETER: .375 TO .812 [9.53 TO 20.63]
- UL FILE NO.:E70531
- INSTALLATION INSTRUCTIONS, BUTTON ID, AND LABELS ARE PACKED WITH PART
- ALL BUTTONS ARE HIGH AMBIENT, CHEMICALLY RESISTANT MATERIAL

REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm	INCH	INCH/MM	NTS	INCH	
A	RELEASE SALES DRAWING EC NO: IPC2016-0371 DRWN: KCOX01 2015/09/08 CHKD: HKNEELAN 2015/09/08 APPR: JFMURPHY 2015/09/29	▽=0 ▽C=0	4 PLACES	±---	±---	DRAWN BY DATE KCOX01 2015/09/08	TITLE 8 POSITION WATERTITE PLASTIC PENDANT STATION	MOLEX INCORPORATED DOCUMENT NO. SD-130126-072 SHEET NO. 1 OF 1
			3 PLACES	±---	±.005	CHECKED BY DATE HKNEELAN 2015/09/08		
			2 PLACES	±.13	±.010	APPROVED BY DATE JFMURPHY 2015/09/29		
			1 PLACE	±.25	±.020	MATERIAL NO.		
			ANGULAR ±1/2°		SEE TABLE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A			

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A