

LED FLUSH MOUNT

NEED HELP?
Call or Email us first

Our service team is ready to answer your questions...
1-800-265-1833 (English) / 1-800-567-2513 (French)
IN CANADA - resalescanada@canarmna.ca - IN USA - resalesusa@canarmna.ca

Monday – Friday
8 AM - 5 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY
INSTRUCTIONS**
SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers



Wrench

Wiring supplies
as required by
local electrical
code


WARNING:

1. READ ALL INSTRUCTION BEFORE INSTALLATION.
2. SYSTEM IS INTENDED FOR INSTALLATION BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND LOCAL REGULATIONS.
3. GO TO THE MAIN FUSE BOX, OR CIRCUIT BREAKER. PLACE THE MAIN POWER SWITCH IN THE "OFF" POSITION AND UNSCREW THE FUSE(S) OR SWITCH "OFF" THE CIRCUIT BREAKER SWITCH(ES) THAT CONTROL THE POWER TO THE FIXTURE OR ROOM THAT YOU ARE WORKING ON.
4. PLACE THE WALL SWITCH IN THE "OFF" POSITION.

CAUTIONS


1. THESE LUMINAIRES (FIXTURES) ARE DESIGNED TO MEET THE LATEST NEC REQUIREMENTS AND ARE LISTED IN FULL COMPLIANCE WITH ETL LIST.
2. BEFORE ATTEMPTING INSTALLATION, CHECK YOUR LOCAL ELECTRICAL CODE, AS IT SETS THE WIRING STANDARDS FOR YOUR LOCALITY.

INSTALLATION:

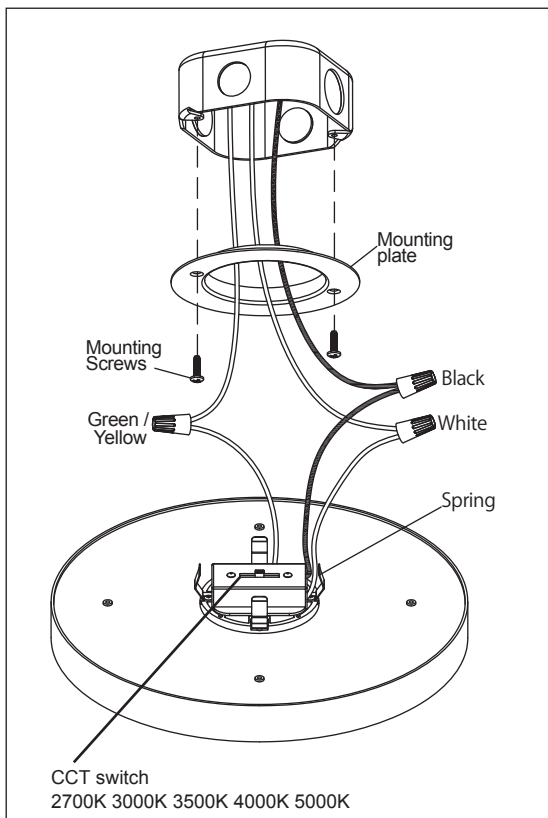

PACKAGE CONTENTS

PART	DESCRIPTION	QTY
A	Fixture	1
B	Mounting Screws	2
C	Wire nuts	3
D	Mounting plate	1



1. Attach mounting plate to the Junction box with two mounting screws.
2. Use the slide switch to choose a color temperature. The options are 2700K, 3000K, 3500K, 4000K and 5000K.
3. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical box. Attach the black wire from the light fixture to the black wire in the electrical box. Attach the white wire from the light fixture to the white wire in the electrical box.
4. Push the wire nuts into outlet box. Complete the installation by pushing the fixture into the mounting plate. Slightly turn sideways to let fixture fit to the ceiling if necessary. Do not turn 360 degree and twist the internal wires.

This LED light is suitable to be dimmed by Leviton# 742-66EV-P0W, Leviton# 742-6672-HLW, Leviton# 722-6674-PDW, Lutron# SCL-153PH-WH
DL-6F-10WS: Max#of lamps per 150W dimmer: 15pcs.
DL-8F-15WS: Max#of lamps per 150W dimmer: 10pcs.
DL-10F-20WS: Max#of lamps per 150W dimmer: 7pcs.
DL-12F-25WS: Max#of lamps per 150W dimmer: 6pcs.
DL-14F-30WS: Max#of lamps per 150W dimmer: 5pcs.