



www.airpipeusa.com
602-362-PIPE (7473)

Rigid Aluminum Pipe



- Up to max. 8" (200mm) diameter.
- High-quality powder coating available in blue, green and gray. Additional colors can also be supplied.
- Designed for compressed air, vacuum, and inert gases.
- Light-weight & corrosion-free.

Aluminum Pipe Connectors



- Quick-connect design.
- Superior reliability & longevity.
- Largest selection of fitting configurations.
- Modular & reusable.
- 100% recyclable & non-flammable materials.

Aluminum Quick Drop Fittings




- Quick installation to main ring.
- Can be used vertically or horizontally.
- Design does not allow water to enter downstream points of use.
- Configurations allow for multiple drop connection types. e.g., hose reels.

Ball & Butterfly Valves



- Quick connection.
- Available for NPT thread, flange, and quick connection types.
- High-flow design ensures optimal performance.

Flexible Hoses

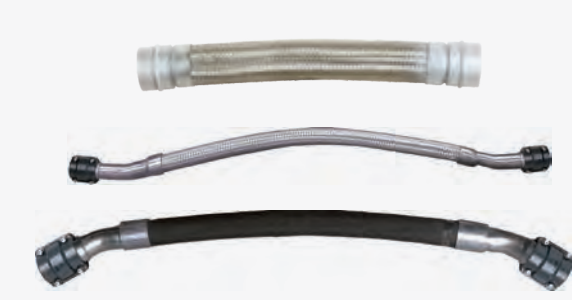

- Suitable for compressor & equipment outlets to absorb vibration.
- Allows for expansion and contraction of the pipe system.
- Bypass obstacles.
- Resistant to mineral or synthetic lubricated oils.

Tools & Accessories



- Suitable for various pipe systems.
- Used for a variety of installation methods, e.g., wall, beam, roof, channel, rod, etc.
- Designed to work best with AIRpipe products.

ALUMINUM PIPE – BLUE

19 ft. Length	20
1000	20
2000	25
4000	40
5000	50
6000	63
7000	80
8000	100
9000	150
A000	200

ALUMINUM PIPE – GREEN

19 ft. Length	20
1061	20
2061	25
4061	40
5061	50
6061	63
7061	80
8061	100
9061	150
A061	200

ALUMINUM PIPE – GRAY

19 ft. Length	20
1062	20
2062	25
4062	40
5062	50
6062	63
7062	80
8062	100
9062	150
A062	200

EQUAL 90° ELBOW

1003	20
2003	25
4003	40
5003	50

EQUAL TEE

6003	63
7003	80
8003	100
9003	150
A003	200

EQUAL 45° ELBOW

1005	20
2005	25
4005	40
5005	50

EQUAL TEE

6005	63
7005	80
8005	100
9005	150
A005	200

EQUAL 90° ELBOW

6004	63
7004	80
8004	100
9004	150
A004	200

END CAP

1006	20
2006	25
4006	40
5006	50

6006	63
7006	80
8006	100
9006	150
A006	200

*Supplied with union connector

PIPE-TO-PIPE CONNECTOR

1002	20
2002	25
4002	40
5002	50

REDUCING TEE

2107	25	20
4207	40	25
5207	50	25
5407	50	40
6407	63	40
6507	63	50
7407	80	40
7507	80	50
8507	100	50

*Supplied with union connectors

REDUCING TEE

7607	80	63
8607	100	63
8707	100	80
9607	150	63
9707	150	80
9807	150	100
A607	200	63
A707	200	80
A807	200	100
A907	200	150

*Supplied with (3) union connectors

EQUAL WYE

6009	63
7009	80
8009	100
9009	150
A009	200

*Supplied with (3) union connectors

REDUCING WYE

8712	63
9712	80
9812	100
A812	150
A912	200

*Supplied with (3) union connectors

REDUCING PIPE-TO-PIPE CONNECTOR

2121	25	20
4221	40	25
5221	50	25
5421	50	40
6421	63	40
6521	63	50
7521	80	50

*Supplied with union connectors

REDUCING PIPE-TO-PIPE CONNECTOR

7621	80	63
8621	100	63
8721	100	80
9721	150	80
9821	150	100
A921	200	150

*Supplied with (2) union connectors

FEMALE THREADED ADAPTER

1019	20	1/2"
1119	20	3/4"
2019	25	1/2"
2219	25	1"
4419	40	1 1/2"
5519	50	2"

FEMALE THREADED ADAPTER

6619	63	2 1/2"
7719	80	3"

*Supplied with union connector

UNIVERSAL QUICK COUPLERS

1484	1/4"	ISO 6150B/ Automotive Body to 1/2" Male NPT
3884	3/8"	ISO 6150B/ Automotive Body to 1/2" Male NPT
4284	1/4"	Automotive Nipple to 1/4" Male NPT
8284	3/8"	Automotive Nipple to 3/8" Male NPT
4184	1/4"	Industrial (ISO B) Nipple to 1/4" Male NPT
8184	3/8"	Industrial (ISO B) Nipple to 3/8" Male NPT

MALE THREADED ADAPTER

1017	20	1/2"
1117	20	3/4"
2017	25	1/2"
2117	25	3/4"
2217	25	1"
4217	40	1"
4317	40	1 1/4"
4417	40	1 1/2"
4517	40	2"
5417	50	1 1/2"
5517	50	2"

MALE THREADED ADAPTER

6517	63	2"
6617	63	2 1/2"
7617	80	2 1/2"
7717	80	3"

*Supplied with union connector

MALE ELBOW

1015	20	1/2"
1115	20	3/4"
2015	25	1/2"
2215	25	1"
4415	40	1 1/2"
5515	50	2"

FEMALE ELBOW

1013	20	1/2"
1113	20	3/4"
2013	25	1/2"
2213	25	1"
4413	40	1 1/2"
5513	50	2"

STRAIGHT QUICK DROP

8410	100	40
9410	150	40
9510	150	50
A410	200	40
A510	200	50

FEMALE THREADED STRAIGHT QUICK DROP

5099	50	1/2"
5199	50	3/4"
6099	63	1/2"
6199	63	3/4"
7099	80	1/2"
7199	80	3/4"
8099	100	1/2"
8199	100	3/4"
9099	150	1/2"
9199	150	3/4"
A099	200	1/2"
A199	200	3/4"

QUICK DROP

2110	25	20
2210	25	25
4110	40	20
4210	40	25
5110	50	20
5210	50	25
6110	63	20
6210	63	25
7110	80	20
7210	80	25
8110	100	20
8210	100	25
9110	150	20
9210	150	25
A210	200	25

FEMALE THREADED QUICK DROP

2011	25	1/2"
4011	40	1/2"
4111	40	3/4"
5011	50	1/2"
5111	50	3/4"
6011	63	1/2"
6111	63	3/4"
7011	80	1/2"
7111	80	3/4"
8011	100	1/2"
9011	150	1/2"

BALL VALVE

FEMALE	NPT
0073	1/2"
0173	3/4"
2073	1"
4073	1 1/2"
5073	2"

MALE	NPT
1073	1/2"
1173	3/4"

MALE/FEMALE	NPT
0273	1/2"
1273	3/4"

MALE THREADED QUICK CONNECT VALVE

1352	20	3/4"
2352	25	1"
4352	40	1 1/2"
5352	50	2"
6352	63	2 1/2"

ANGLED TWO PORT FEMALE WALL BRACKET

1552	20	75° Two Ports 1/2"
2552	25	75° Two Ports 1/2"

*Versatile mounting plate and hardware included.

METAL PIPE HANGER

4122	40
5122	50
6122	63
7122	80
8122	100
9122	150
A122	200

PIPE CLIP

1022	20
2022	25
4022	40
5022	50
6022	63
7022	80
8022	100

3/8"-16 threaded rod port

UNISTRUT NUT

0227	3/8"-16 threaded rod port
------	---------------------------

FLEXIBLE HOSES

STRAIGHT CONNECTION	LENGTH (in)
1055	20 22.44"
2055	25 22.44"
4055	40 23.62"
5055	50 23.62"

FLEXIBLE HOSES

STRAIGHT CONNECTION	LENGTH (in)
6055	63 25.59"
7055	80 25.59"
8055	100 25.98"
9055	150 41.89"
A055	200 61.18"

*Supplied with (2) union connectors

30° CONNECTION

LENGTH (in)	
4155	40 47.24"
5155	50 53.15"

30° CONNECTION

LENGTH (in)	
6155	63 53.15"
7155	80 72.83"
8155	100 74.80"

*Supplied with (2) union connectors

QUICK CONNECT VALVE

1052	20
2052	25
4052	40
5052	50
6052	63

ONE-PORT FEMALE WALL BRACKET

1252	20	1/2"
2252	25	1"
2452	25	1/2"
4452	40	1 1/2"
5552	50	2"
6652	63	2 1/2"

*Versatile mounting plate and hardware included.

TWO-PORT FEMALE WALL BRACKET

1152	20	1/2
------	----	-----