


GF20S

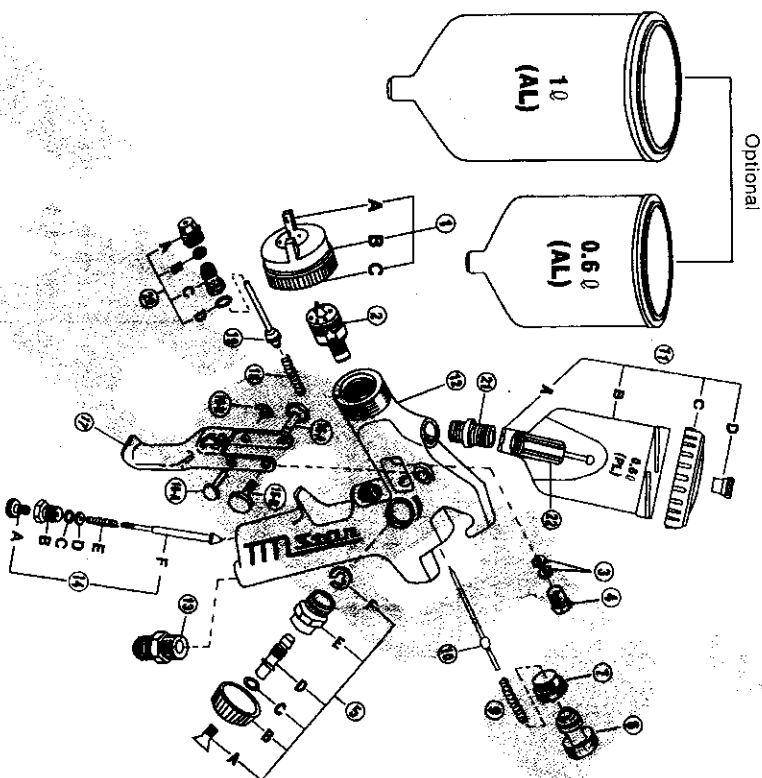

NO.	DESCRIPTION	QTY	NO.	DESCRIPTION	QTY	NO.	DESCRIPTION	QTY
1	Air Cap Set # 1/8 2 #3 #4 #5	1	11	Cup—0.6 (PL) 0.6 (AL) 1 (AL)	1	17	Trigger	1
2	Fluid Nozzle # 1/8 2 #3 #4 #5	1	12	Gun Body	1	18	Air Valve Spring	1
3	Needle Valve Packing	2	13	Air Hose Joint	1	19	Air Valve	1
4	Needle Valve Packing Seat	1	14	Air Adjusting Valve Set	1	20	Air Valve Seal Set	1
5	Spreader Adjusting Valve Set	1	15A	Trigger Screw	1	20A	Air Valve Packing Seat	1
7	Lock Nut	1	15B	Trigger Stud	1	20B	Air Valve Packing	1
8	Fluid Adjusting Screw	1	16A	Trigger Pin	1	20C	Valve Body	1
9	Needle Valve Spring	1	16B	Trigger Stopper	1	21	Fluid Joint	1
10	Fluid Needle Set # 1/8 2 #3 #4 #5	1				22	Filter	1

4

MODEL	TYPE	STAINLESS STEEL FLUID NOZZLE TIP mm / inch	ATOMIZING AIR PRESSURE kg/cm ² / psi	AIR CONSUMPTION l/min / cfm	FLUID OUTPUT ml/min	PATTERN WIDTH mm/inch	COMPRESSOR KW	CUP CAPACITY cc
S-106-14G		1.4 / 0.055		215 / 7.6	245	240 / 9.4		
S-106-17G	GRAVITY	1.7 / 0.067	3.5 / 50	220 / 7.8	310	250 / 9.8	0.75 - 1.5	0.6 / 1.0 (PL / AL)
S-106-20G		2.0 / 0.079		235 / 8.3	355	265 / 10.4		
S-106-14IG		1.4 / 0.055		241 / 8.5	250	245 / 9.8		
S-106-17IG	GRAVITY	1.7 / 0.067	3.5 / 50	246 / 8.7	315	255 / 10.6	0.75 - 1.5	0.6 / 1.0 (PL / AL)
S-106-20IG		2.0 / 0.079		260 / 9.2	360	270 / 10.6		
S-106-142G		1.4 / 0.055		295 / 10.4	255	260 / 9.8		
S-106-172G	GRAVITY	1.7 / 0.067	3.5 / 50	303 / 10.7	320	260 / 10.2	1.5 - 2.2	0.6 / 1.0 (PL / AL)
S-106-202G		2.0 / 0.079		311 / 11.0	360	275 / 10.8		

2.5 (0.089")/2.8 (0.110")/3.5 (0.138") FLUID NOZZLE TIP ARE ALSO AVAILABLE
AIR INLET IS 1/4"PPR/PS (N) FLUID INLET IS M16*P1.5
ALL ABOVE RECORDS FOR REFERENCE ONLY.

How to select air cap?

14G → Silver lock ring for general applications, plastic products, wooden products, agricultural machinery, etc.

171G → Blue lock ring for high class furniture, metallic products, machinery, automotive refinishing applications, etc.

202G → Red locking for professional automotive, musical instruments, refinishing applications, etc. (Especially for metallic and pearl paints)

153G → Green lock ring for low pollution required applications.

▲ When changing fluid nozzle of a different size, make sure the whole set, including air cap and fluid needle set, is also changed accordingly.

5