

811R large diameter

ApolloPress® press end copper reducing outlet tee
CxCxC (3" x 2-1/2" through 4" x 3")



| | |
|------------------|--|
| job name: | |
| job location: | |
| engineer: | |
| contractor: | |
| tag: | |
| po#: | |
| rep: | |
| wholesale dist.: | |

description

the ApolloPress® 811R large diameter press reducing outlet tee features a lead free dezincification resistant copper body, a patented stainless-steel solid cross-section grab ring, a nylon separation ring and an EPDM o-ring. ApolloPress® products are manufactured utilizing proven ASTM materials and standards. proudly made in the USA.

features

- lead free construction
- leak before Press® technology
- visual element, break away band (Pat# 9,532,451)
- rigid® XLC press tool compatible
- made in USA

approvals

- UPC, cUPC & IPC
- IAPMO PS 117-2016 & TIL MSE-13
- NSF/ANSI 61 - water quality
- NSF/ANSI 372 - lead free

performance rating

- maximum pressure: 300 psi
- temperature range: 32°F to 250°F depending on application

ApolloPress®

- large diameter sizes 3"x2-1/2", 4"x2-1/2", 4"x3"
- model 811R, reducing outlet tee


ApolloPress® connectors are designed for direct mechanical connection to ASTM B88-Type K, L, and M copper tubing in the hard drawn condition. Press connectors are not suitable for steam or flammable gas service.

standard materials list

| | |
|--------------------|------------------------------|
| Body | UNS C12200 copper |
| Grab Ring | 316/304 stainless steel |
| Spacer Ring | nylon 66 |
| O-Ring | EPDM |
| Lubrication | silicone, ANSI/NSF-61 listed |

dimensions

| ITEM NO. | SIZE (IN.) | DIMENSIONS (IN.) | | | | | | | | | | | WEIGHT (LB.) |
|----------|------------|------------------|------|-----|------|-----|------|-----|------|--------|-------|-------|--------------|
| | | A | B | C | D | E | F | G | H | HEIGHT | WIDTH | DEPTH | |
| 10062079 | 3x3x2-1/2 | 7.95 | 5.9 | 2.1 | 1.88 | 2.1 | 1.88 | 1.9 | 2.16 | 5.9 | 7.95 | 3.68 | 3.17 |
| 10062078 | 4x4x2-1/2 | 9.84 | 6.91 | 2.5 | 2.42 | 2.5 | 2.42 | 1.9 | 2.66 | 6.91 | 9.84 | 4.7 | 5.41 |
| 10062076 | 4x4x3 | 9.84 | 7.28 | 2.5 | 2.42 | 2.5 | 2.42 | 2.1 | 2.83 | 7.28 | 9.84 | 4.7 | 5.8 |

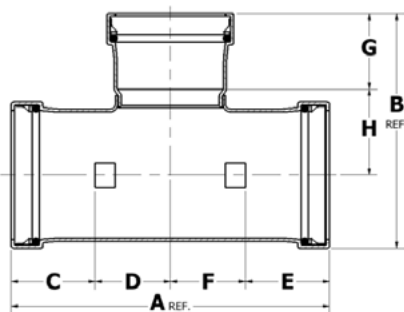

*lead free: the wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. complies with federal public law 111-380. ANSI 3rd party approved and listed.