

SHOWA 451

Created with warmth in mind, our 451 thermal-insulated gloves are designed to be worn in cold weather. Its seamless liner reduces irritation and an elastic wrist cuff keeps dirt and debris out of the glove. Thanks to the natural rubber palm coating, the 451 gloves are also abrasion resistant with increased grip from the rough surface texture. When wearing these gloves, the hand is also protected from aggressive detergents and alcohols.




BENEFITS

- Thermal insulation
- Flexible
- Breathable
- Extra Grip
- Seamless knit
- Skin-friendly
- Abrasion-resistant


FEATURES

- Rough grip
- Ergonomic
- Elasticated wrist cuff
- Natural Rubber Palm Coating

NORMS & CERTIFICATES

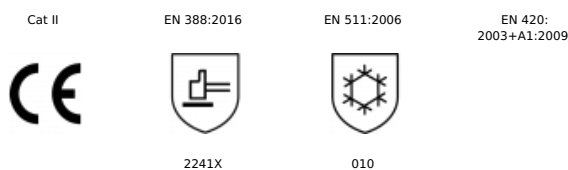

INDUSTRIES



HAZARDS



TRADES & APPLICATIONS

- Signalers
- Brick laying
- Carpentry
- Driving machines
- Masonry
- Demolition
- Shipping/Receiving

GET IN TOUCH

SHOWA International | WTC - Tower I - Strawinskylaan 1077 XX Amsterdam - The Netherlands
showagroup.com | info@showagroup.eu
© SHOWA GROUP 2021 | All rights reserved

PACKAGING

- Pair per polybag: 10
- Polybags per case: 12
- Pair per case: 120

LENGTH

220 - 270mm

COATING

- Latex

SIZES

7/S | 8/M | 9/L | 10/XL

COLOUR

- Grey

MATERIAL

- Acrylic
- Cotton
- Polyester
- Seamless knit

USER INSTRUCTIONS

Gloves provide protection from chemical and mechanical hazards shown. Do not use gloves that show signs of wear. If required, cleanse outer surface of glove with running water. Discard used gloves in compliance with local regulations. Do not wear gloves when there is a risk of entanglement by moving parts of machines.

DISCLAIMER

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.

GET IN TOUCH

SHOWA International | WTC - Tower I - Strawinskylaan 1077 XX Amsterdam - The Netherlands
showagroup.com | info@showagroup.eu
© SHOWA GROUP 2021 | All rights reserved