



Submittal Data Sheet

1.5-Ton Wall Mounted Unit

FTXS18LVJURXS18LVJU

FEATURES

- IR controller included
- Titanium apatite photocatalytic air purification filter (option)
- Hot start technology
- Auto-restart (after power failure)
- Intelligent eye occupancy sensor

BENEFITS

- Quiet operation
- Low ambient cooling operation down to 0° F with field setting and wind baffle (KPW945A4)
- Operating Range - Cooling (14° - 114.8°)
- Operating Range - Heating (5° - 64.4°)
- 12 year limited parts and compressor warranty with online registration
- 5 Year limited parts warranty for commercial applications

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

1.5-Ton Wall Mounted Unit

FTXS18LVJURXS18LVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTXS18LVJU	Indoor Unit Name:	FTXS18LVJU
Outdoor Unit Model No.	RXS18LVJU	Outdoor Unit Name:	RXS18LVJU
Rated Cooling Capacity (Btu/hr):	18,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	14,790	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	18,000 / 5,800	Rated Height Difference (ft):	65.60
Cooling Input Power (kW):	1.420	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
SEER (Non-Ducted/Ducted):	20.30 /	HSPF (Non-Ducted/Ducted):	11.0 /
EER (Non-Ducted/Ducted):	12.70 /	Heating COP (Non-Ducted/Ducted):	3.7 /
Rated Heating Capacity (Btu/hr):	21,600		
Max/Min Heating Capacity (Btu/hr):	21,600 / 5,800		
Heating Input Power (kW):	1.71		

SYSTEM DETAILS

Refrigerant Type:	R-410A	Cooling Operation Range (°F DB):	14 - 115
Holding Refrigerant Charge (lbs):	4.0	Heating Operation Range (°F WB):	5 - 64
Additional Charge (lb/ft):	0.01	Max. Pipe Length (Vertical) (ft):	66
Pre-charge Piping (Length) (ft):	33	Cooling Range w/Baffle (°F DB):	0 - 115
Max. Pipe Length (Total) (ft):	98	Heating Range w/Baffle (°F WB):	0 - 77
Max Height Separation (Ind to Ind ft):	66		



Submittal Data Sheet

1.5-Ton Wall Mounted Unit


FTXS18LVJURXS18LVJU

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	583/484/385/360
Power Supply Connections:	See Outdoor Unit for Electrical Specs	Moisture Removal (Gal/hr):	1.0
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	13-3/8 x 41-5/16 x 9-3/4	Condensate Connection (inch):	5/8
Panel (HxWxD) (in):		Sound Pressure (H/M/L/SL) (dBA):	46/41/36/33
Net Weight (lb):	31	Sound Power Level (dBA):	62
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.00 / 0.00

DIMENSIONAL DRAWING - INDOOR UNIT

FTXS15,18_LVJU

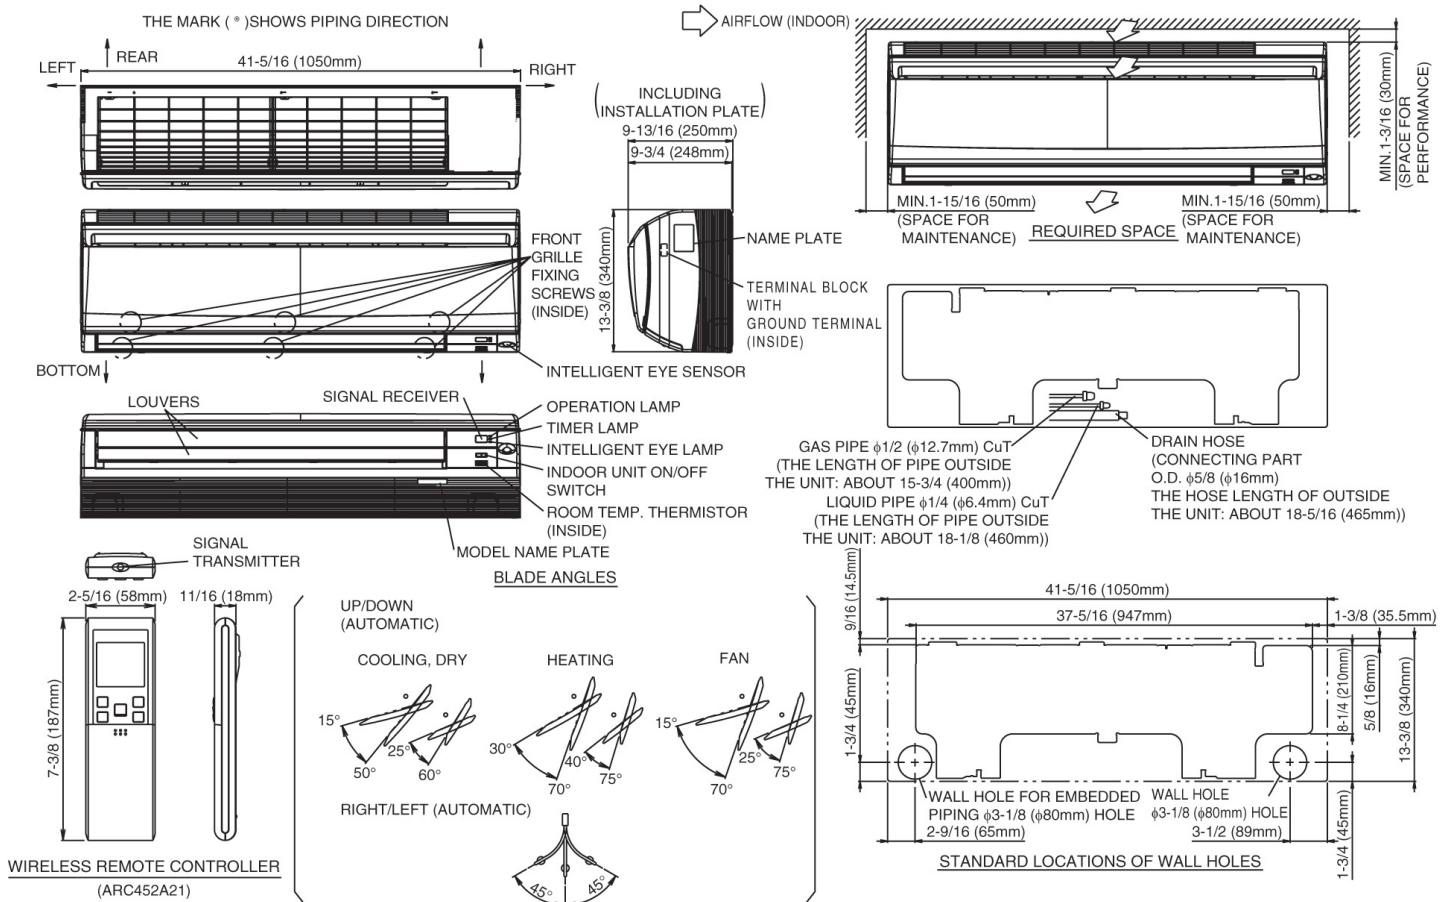

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 1/13/2017 6:46:34 AM

Page 3 of 4



Submittal Data Sheet

1.5-Ton Wall Mounted Unit


FTXS18LVJURXS18LVJU

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	13.80	Airflow Rate (H) (CFM):	1,780
Max Overcurrent Protection (MOP) (A):	20.00	Gas Pipe Connection (inch):	1/2
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):	5.9	Sound Pressure (H) (dBA):	49
Dimensions (HxWxD) (in):	28-15/16 x 32-1/2 x 11-13/16	Sound Power Level (dBA):	63
Net Weight (lb):	104		

DIMENSIONAL DRAWING - OUTDOOR UNIT

RXS15,18_LVJU

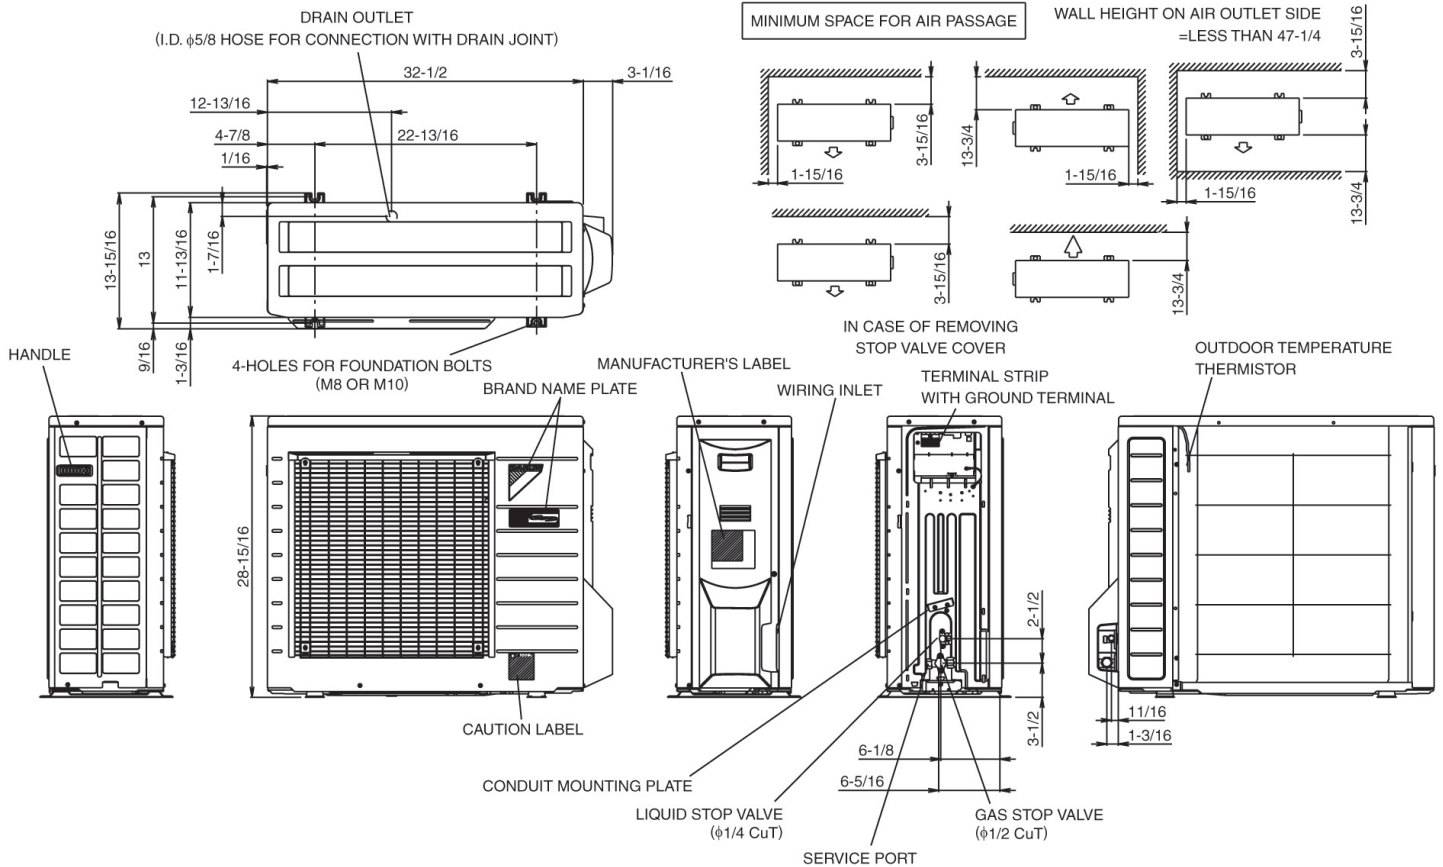

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 1/13/2017 6:46:34 AM

Page 4 of 4