

Job Name:	
Tag#	



<b>Submittal Data Sheet</b>	<b>FTXG15HVJU / RXG15HVJU</b>
1.25-Ton Wall Mounted Heat Pump System	



Efficiency			
Cooling		Heating	
<b>SEER</b>	21.0	<b>HSPF</b>	10.0
<b>EER</b>	12.9	<b>COP</b>	3.99

Performance	
Cooling (Btu/hr)	
<b>Rated (Min/Max)</b>	15,000 (5,300 / 18,000)
<b>Sensible @ AHRI</b>	11,580
<b>Moisture Removal Pt/h</b>	4.8
<b>Operating Range</b>	14°F – 109°F
<b>Rated Cooling Conditions:</b>	
Indoor:	80°F DB/67°F WB
Outdoor:	95°F DB/75°F WB
Heating (Btu/hr)	
<b>1: @ 47° Rated (Min/Max)</b>	18,000 (4,400 / 21,200)
<b>2: @ 17° Rated</b>	11,100
<b>Operating Range</b>	-4°F – 75°F
<b>1: Rated Heating Conditions:</b>	
Indoor:	70°F DB/60°F WB
Outdoor:	47°F DB/43°F WB
<b>2: Rated Heating Conditions:</b>	
Indoor:	70°F DB/60°F WB
Outdoor:	17°F DB/15°F WB

Complete warranty details available from your local dealer or at [www.daikincomfort.com](http://www.daikincomfort.com). To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec. *If product is installed in a commercial application, limited warranty period is 5 years.*

Indoor Specifications				
Airflow Rate (cfm)	Cooling		Heating	
	H	M	H	M
	487	371	494	392
Sound (dBA) H / M / L	L		L	
	43 / 35 / 27	258	43 / 36 / 29	293
Dimensions (H × W × D) (in)		12 × 35-1/16 × 8-1/4		
Weight (Lbs)		31		

Outdoor Specifications				
Compressor		Hermetically Sealed Swing Type		
Refrigerant		R-410A		
Refrigerant Oil		PVE (FVC50K)		
Airflow Rate (cfm)	Cooling		Heating	
	H	1,262	H	1,195
Sound Power Level (dBA)		50		
Dimensions (H × W × D) (in)		22-3/8 × 31-5/16 × 11-1/4		
Weight (Lbs)		99		

Electrical		
	208/60/1	230/60/1
System MCA	14.5	14.5
System MFA	15	15
Compressor RLA	5.1	4.6
Outdoor fan motor FLA	.13	.13
Outdoor fan motor W	60	60
Indoor fan motor FLA	.17	.15
Indoor fan motor W	57	57
<b>MFA:</b> Max. fuse amps <b>MCA:</b> Min. circuit amps (A) <b>FLA:</b> Full load amps (A)		
<b>RLA:</b> Rated load amps (A) <b>W:</b> Fan motor rated output (W)		


Piping	
Liquid (in)	1/4
Gas (in)	3/8
Drain (in)	11/16
Max. Interunit Piping Length (ft)	32
Max. Interunit Height Difference (ft)	26
Chargeless (ft)	-
Additional Charge of Refrigerant (oz/ft)	-

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



# RXG15HVJU Dimensional Data

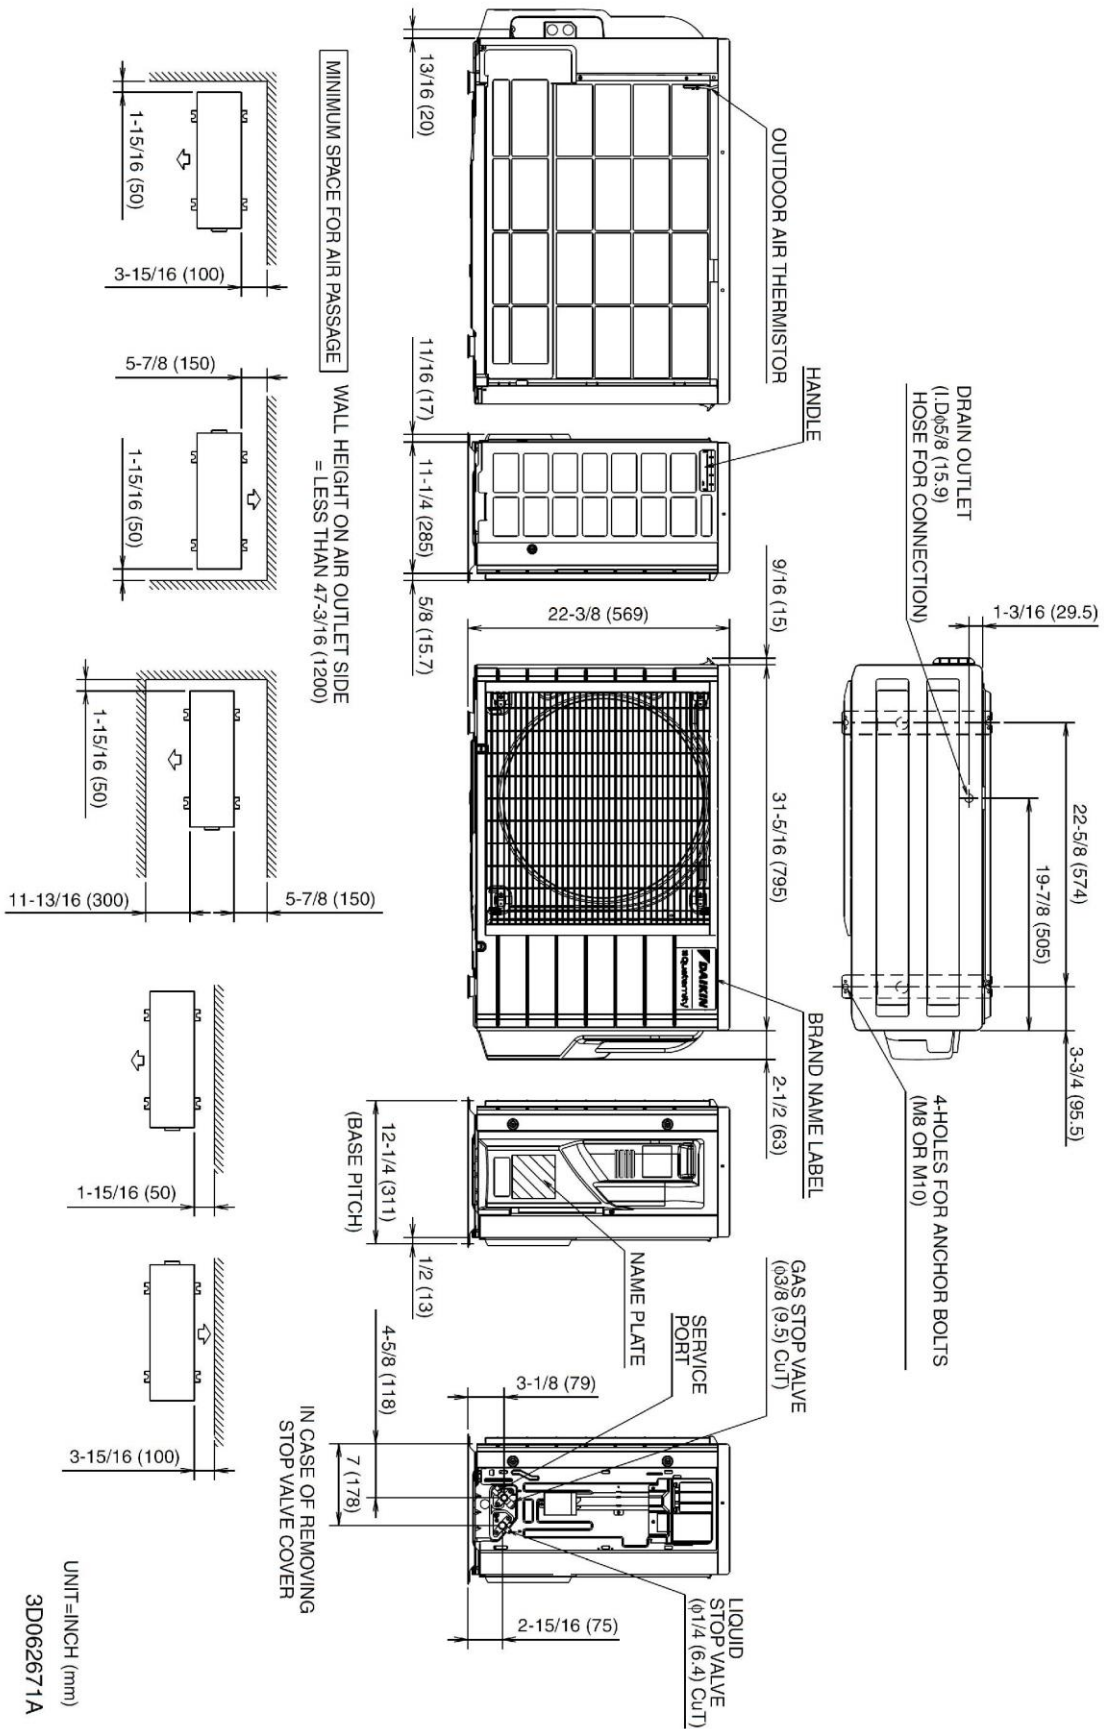

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



## Indoor Unit

Included	Part Number	Description
	DACA-TS1-1	Daikin ENVi Intelligent Thermostat Kit
	DACA-CP1-1	Inline Condensate Pump (Fits inside all Daikin wall & floor mount units)
	DACA-CP4-1	External Condensate Pump

## Outdoor Unit

Included	Part Number	Description
	DACA-WB-3	Powder-Coated Wall-Mounted Bracket
	KKP937A4	Drain Plug for OD Unit
	KPW937C4	Air Adjustment Grille