



Submittal Data Sheet

2.5-Ton Inverter Ducted Unit

FTQ30PBVJURZQ30PVJU9

FEATURES

- Low ambient heat operation down to -4°F
- Upflow or horizontal right configurations
- Field-installed electric heat options available from 3kW to 15kW
- 10 year limited parts and compressor warranty

BENEFITS

- Quiet operation

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

2.5-Ton Inverter Ducted Unit

FTQ30PBVJURZQ30PVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTQ30PBVJU	Indoor Unit Name:	FTQ30PBVJU
Outdoor Unit Model No.	RZQ30PVJU9	Outdoor Unit Name:	2.5-Ton SkyAir Heat Pump
Rated Cooling Capacity (Btu/hr):	30,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	22,000	Rated Piping Length(ft):	
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	164.00
Cooling Input Power (kW):	2.220	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
SEER (Non-Ducted/Ducted):	19.50 /	HSPF (Non-Ducted/Ducted):	10.0 /
EER (Non-Ducted/Ducted):	13.50 /	Heating COP (Non-Ducted/Ducted):	3.7 /
Rated Heating Capacity (Btu/hr):	34,000		
Heating Input Power (kW):	2.69		

SYSTEM DETAILS

Refrigerant Type:	R-410A	Cooling Operation Range (°F DB):	23 - 115
Holding Refrigerant Charge (lbs):	8.8	Heating Operation Range (°F WB):	0 - 77
Additional Charge (lb/ft):		Max. Pipe Length (Vertical) (ft):	
Pre-charge Piping (Length) (ft):		Cooling Range w/Baffle (°F DB):	0 - 115
Max. Pipe Length (Total) (ft):	230	Heating Range w/Baffle (°F WB):	0 - 77
Max Height Separation (Ind to Ind ft):	164		

Submittal Data Sheet
 2.5-Ton Inverter Ducted Unit
 FTQ30PBVJURZQ30PVJU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1,000/850/700
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	2.30	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	58-1/4 x 22 x 26	Condensate Connection (inch):	1
Panel (HxWxD) (in):		Sound Pressure () (dBA):	
Net Weight (lb):	192	Sound Power Level (dBA):	
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.50 / 0.50



DIMENSIONAL DRAWING - INDOOR UNIT

Ductwork Opening:

Model No.	Supply Opening		Return Opening	
	Height	Width	Height	Width
FTQ30,36,42PBVJU	13-1/16"	20"	20-11/16"	18"

(Note: Dimensions to cutout opening)

FTQ30/36/42PBVJU
 Unit: Inches

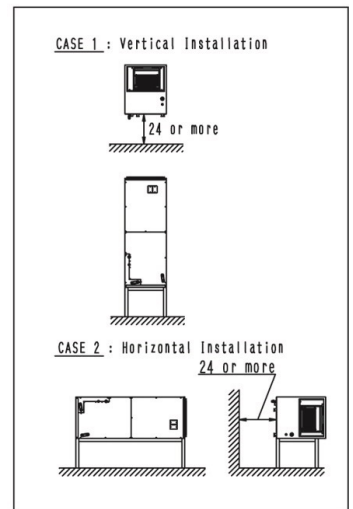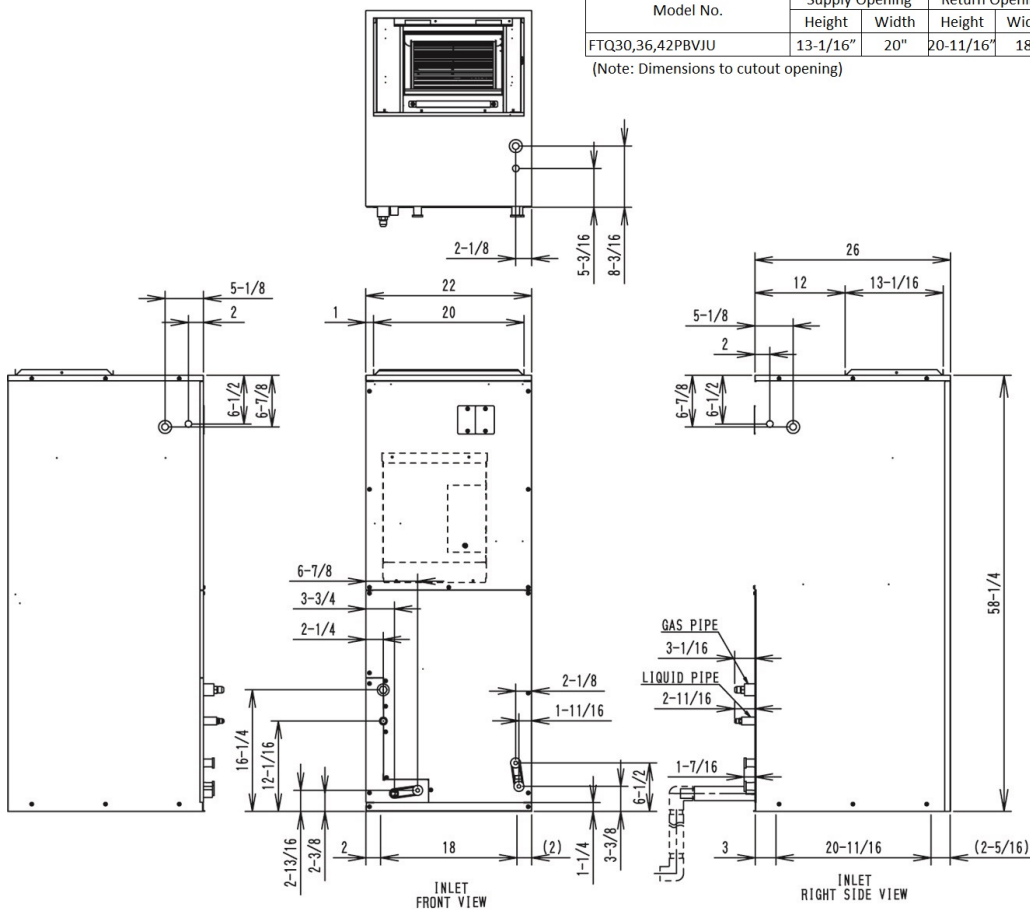



Submittal Data Sheet

2.5-Ton Inverter Ducted Unit

FTQ30PBVJURZQ30PVJU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	30 - 100
Min. Circuit Amps MCA (A):	27.00	Airflow Rate (H) (CFM):	3,740
Max Overcurrent Protection (MOP) (A):	30.00	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):	15.7	Sound Pressure (H) (dBA):	58
Dimensions (HxWxD) (in):	52-15/16 x 35-7/16 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	283		

DIMENSIONAL DRAWING - OUTDOOR UNIT

