



INSULATION ADHESIVES

DUCT SEALERS

SILICONES

SPRAY PRODUCTS



PRODUCT CATALOG



Duro Dyne Insulation Adhesives, Duct Sealers, Silicones and Spray Products are manufactured in the U.S.A.



TABLE OF CONTENTS

WATER BASED INSULATION ADHESIVES.....	2-3
WATER BASED DUCT SEALERS.....	3-4
SOLVENT BASED INSULATION ADHESIVES.....	5
SOLVENT BASED DUCT SEALERS.....	5
PRESSURIZED SELF-CONTAINED CANISTERS.....	6
SILICONES AND ROOF PATCH SEALANT.....	7
SPRAY PRODUCTS.....	8-9
ADHESIVE APPLYING SYSTEMS.....	10
CAULK GUN.....	11
CANISTER ACCESSORIES	11
BRISTLE BRUSHES.....	11

PROPRIETARY AND CONFIDENTIAL: The drawings and specifications contained in this publication are the exclusive property of Duro Dyne Corporation and shall not be divulged, reproduced, copied or used as the basis for the manufacture or sale of apparatus without the express written authorization of Duro Dyne Corporation.

WATER BASED INSULATION ADHESIVES

IMPORTANT! STIR WATER BASED ADHESIVES WELL BEFORE USE!
Especially in colder climates, to prevent spraypump from clogging due to material settling.

WIT



Adhesive for bonding insulation material to sheet metal.

- Water based
- Good wet tack
- Non-flammable when wet



File #R5286

ITEM#	CODE	DESCRIPTION
5056	WIT-1	WIT - 1 Gallon Pail
5057	WIT-5	WIT - 5 Gallon Pail
5058	WIT-55	WIT - 55 Gallon Drum

PROPERTIES	
TYPE	Resin Emulsion
SOLIDS	57% ± 2%
WEIGHT	9.8 lbs./gal.
COLOR	White
ODOR	Bland
VOC	<5 gms/ltr
VISCOSITY	1600-1800 CPS. Typical at 1800. Brookfield LVF #4 Spindle, 6 RPM @ 25°C
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	No Damage-1 cycle
STORAGE LIFE	6 months @ 70°F
CLEAN WITH	warm water/detergent
METHOD OF APPLICATION	Designed for use with spray equipment or Duro Dyne Roto Bonder. As a general practice, it is advisable that liquid products be stirred prior to use.

WITLV-AS/BWITLV-AS



WITLV-AS is a premium, multi-use, water based, non-flammable, UL Classified duct liner and insulation adhesive specifically engineered and formulated for all types of spray, roller, brush or extrusion applications.

- Airless Sprayable
- Water based
- Cost effective
- Non-flammable
- White or Black available



File #R5286

ITEM#	CODE	DESCRIPTION
5106	WIT5LVAS	WITLV-AS - 5 Gallon Pail - White
5107	WIT50LVAS	WITLV-AS - 50 Gallon Drum- White
5127	BWIT5LVAS	BWITLV-AS - 5 Gallon Pail- Black
5128	BWIT50LVAS	BWITLV-AS - 50 Gallon Drum- Black

PROPERTIES	
TYPE	Synthetic latex
SOLIDS	Approx 40%
WEIGHT	9.5 lbs./gal.
COLOR	White or Black
ODOR	Mild
VOC	2.4 gms/ltr
VISCOSITY	>2000 cps
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	No Damage-5 cycles
STORAGE LIFE	One year (unopened)
CLEAN WITH	warm water/soap when wet, solvent when dry
METHOD OF APPLICATION	Brush, roller, standard spray or roller coated. As a general practice, it is advisable that liquid products be stirred prior to use.

WATER BASED INSULATION ADHESIVES

SSG

Adhesive for bonding insulation material to metal.



- Water based
- Non-flammable when wet
- Designed for spray use
- Contains no solvents, yet tacks quickly



File #R5286

ITEM#	CODE	DESCRIPTION
5035	SSG-5	SSG - 5 Gallon Pail

PROPERTIES	
TYPE	Ethylene Vinyl Acetate Emulsion
SOLIDS	69% ± 2%
WEIGHT	10.0 lbs./gal.
COLOR	Cream White
ODOR	Bland
VOC	< 5 gms/ltr
VISCOSITY	1400 CPS #7 Brookfield LVF, 6RPM @ 25°C
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	Keep from freezing
STORAGE LIFE	6 months @ 70°F
CLEAN WITH	warm water/ detergent
METHOD OF APPLICATION	Designed for use with spray equipment only. For best results use Duro Dyne's Super Spray Fast application system. As a general practice, it is advisable that liquid products be stirred prior to use.

WATER BASED DUCT SEALERS

DDS181



Recommended for medium and high velocity systems. Suitable for indoor & outdoor use.

- Meets UL181A-M and UL181BM
- Excellent weather resistance
- Excellent UV resistance



File #MH19757

ITEM#	CODE	DESCRIPTION
5010	DDS181-C	DDS181 Duct Sealer - Cartridge
5011	DDS181-1	DDS181 Duct Sealer - 1 Gallon Pail
5013	DDS181-5	DDS181 Duct Sealer - 5 Gallon Pail

PROPERTIES	
TYPE	Vinyl Acetate
SOLIDS	69 ± 2%
WEIGHT	11.6 ± .2 lbs./gal.
COLOR	Grey
ODOR	Mild/Wet; Bland/Dry
VOC	22 gms/ltr
VISCOSITY	140,000-180,000 CPS #7 Brookfield, 20 RPM @ 70 °F
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	No Damage-3 cycles
STORAGE LIFE	Gallons-1 year @ 70°F Cartridge-9 months @ 70°F
CLEAN WITH	water/detergent
METHOD OF APPLICATION	Brush, trowel, putty knife, or caulking gun. As a general practice, it is advisable that liquid products be stirred prior to use.

SAS-UL



Recommended for low and medium velocity systems. Suitable for indoor & outdoor use.

- Water based
- Non-flammable
- Flexible
- Paintable




File #R5286

ITEM#	CODE	DESCRIPTION
5029	SAS-UL-C	SAS-UL Duct Sealer - Cartridge
5027	SAS-UL-1	SAS-UL Duct Sealer - 1 Gallon Pail

PROPERTIES	
TYPE	Siliconized Acrylic
SOLIDS	81.0 ± 1%
WEIGHT	13.2 ± .2 lbs./gal.
COLOR	Grey
ODOR	Mild
VOC	47 gms/ltr
VISCOSITY	320,000-500,000 CPS T-Bar, Spindle TC-93, 20 RPM @ 77°F
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	Protect From Freezing
STORAGE LIFE	1 year @ 70°F
CLEAN WITH	water/detergent
METHOD OF APPLICATION	Brush, trowel, putty knife or caulking gun. As a general practice, it is advisable that liquid products be stirred prior to use.

WATER BASED DUCT SEALERS (CONTINUED)

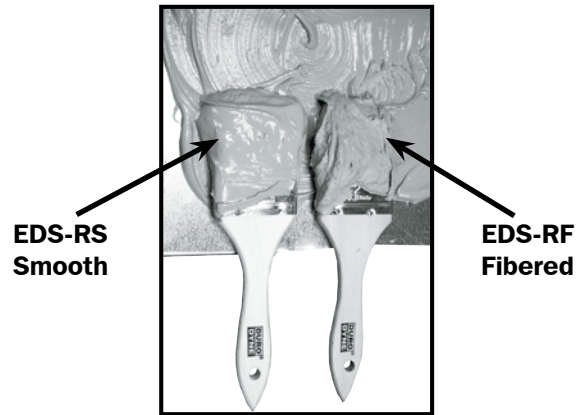

Thick,
"No Drip"
Formula

DUROSEAL® EDS-RS - SMOOTH



Designed for use in high velocity air conditioning, refrigeration, ventilating, and air distributing systems up to 15 w.g. Suitable for indoor & outdoor use. Exceeds all SMACNA Pressure and Sealing Classes.

- For high velocity systems
- UL Listed 181B-M
- Zero VOCs
- Qualifies for LEED EQ Credit 4.1
- Indoor & outdoor use
- Mold & mildew resistant



ITEM#	CODE	DESCRIPTION
5231	EDS-RS1	Smooth Duct Sealer - 1 Gallon Pail
5233	EDS-RSC	Smooth Duct Sealer - Cartridge

PROPERTIES	
TYPE	Smooth Water Based
SOLIDS	73% ± 2%
COLOR	Grey
ODOR	Mild
VOC	0 gms/ltr
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	No Damage-5 cycles
STORAGE LIFE	24 months @ 72°F
CLEAN WITH	Water/Detergent
METHOD OF APPLICATION	Brush, trowel, putty knife, or caulking gun. As a general practice, it is advisable that liquid products be stirred prior to use.

DUROSEAL® EDS-RF - FIBERED



Designed for use in high velocity air conditioning, refrigeration, ventilating, and air distributing systems up to 12 w.g. Suitable for indoor & outdoor use. Exceeds all SMACNA Pressure and Sealing Classes.

- For high velocity systems
- UL Listed 181A-M & 181B-M
- Zero VOCs
- Qualifies for LEED EQ Credit 4.1
- Indoor & outdoor use
- Mold & mildew resistant



ITEM#	CODE	DESCRIPTION
5230	EDS-RF1	Fibered Duct Sealer - 1 Gallon Pail
5232	EDS-RFVC	Fibered Duct Sealer - Cartridge

PROPERTIES	
TYPE	Fibered Water Based
SOLIDS	73% ± 2%
COLOR	Grey
ODOR	Mild
VOC	0 gms/ltr
FLAMMABILITY	Non Flammable
EFFECT OF FREEZING	No Damage-5 cycles
STORAGE LIFE	24 months @ 72°F
CLEAN WITH	Water/Detergent
METHOD OF APPLICATION	Brush, trowel, putty knife, or caulking gun. As a general practice, it is advisable that liquid products be stirred prior to use.

Solvent-based adhesives and duct sealers are being phased out by the industry. Water-based products have now become the products of choice. However, Duro Dyne will continue to supply solvent-based adhesives and duct sealers as long as the industry will allow. Duro Dyne's water-based adhesives and sealers apply easily, tack fast and have none of the inherent health and safety hazards, which can be caused by the use of solvents. Duro Dyne's solvent-based adhesives and duct sealers are considered to be hazardous to your health. Although solvents are typically fast drying, have excellent adhesion properties and are designed to meet U.L. requirements, they are highly flammable and extremely toxic. This necessitates the need for these products to be used in a well-ventilated area. Duro Dyne Corporation recommends the use of water-based products whenever possible.

SOLVENT BASED INSULATION ADHESIVE

RPG



Adhesive for bonding insulation material to sheet metal.

- Solvent Based
- Flammable
- Quick tack & grip of insulation
- High solids content



ITEM#	CODE	DESCRIPTION
5047	RPG1	RPG Adhesive - 1 Gallon Pail
5048	RPG5	RPG Adhesive - 5 Gallon Pail

PROPERTIES	
TYPE	Synthetic Elastomer Rubber
SOLIDS	30% ± 2%
WEIGHT	6.4 ± 5 lbs./gal.
COLOR	Red
ODOR	Mild
VOC	536 gms/ltr
VISCOSITY	2000-3500 CPS. #3 Spindle, 20 RPM @ 77 °F
FLAMMABILITY	Flammable
EFFECT OF FREEZING	None
STORAGE LIFE	1 year @ 70°F
CLEAN WITH	Chlorinated Solvent and Xylol
METHOD OF APPLICATION	Spray, brush, or roller. As a general practice, it is advisable that liquid products be stirred prior to use.

SOLVENT BASED DUCT SEALERS

SGD



Recommended for sealing joints in high pressure indoor air handling systems.

- Solvent based
- Indoor use
- Oil resistant
- Tough
- Flexible
- Use with or without reinforcing tapes



ITEM#	CODE	DESCRIPTION
5046	SGD-C	SGD Duct Sealer - Cartridge
5044	SGD1	SGD Duct Sealer- 1 Gallon Pail
5045	SGD5	SGD Duct Sealer- 5 Gallon Pail

PROPERTIES	
TYPE	Elastomer Rubber
SOLIDS	70% ± 2%
WEIGHT	7.5 ± .5 lbs./gal.
COLOR	Grey
ODOR	Mild
VOC	398 gms/ltr
VISCOSITY	250,000-300,000 CPS.#7 Brookfield, 10 RPM @ 70 °F
FLAMMABILITY	Flammable
EFFECT OF FREEZING	None
STORAGE LIFE	Gallons-1 year @ 70°F Cartridge-9 months @ 70°F
CLEAN WITH	Mineral Spirits, Hexane, Toluene
METHOD OF APPLICATION	Brush, Trowel or power extrusion. As a general practice, it is advisable that liquid products be stirred prior to use.

DLSN



Duro Dyne DLSN Sealant is a grey, single component, non-drying, permanently flexible material designed for sealing metals, and masonry surfaces without the need or requirement of a primer.

- Single component material
- Non-drying
- Permanently flexible
- No need for a primer

ITEM#	CODE	DESCRIPTION
5052	DLSN-C	Duct Lock Sealant - Cartridge
5065	DLSN-5	Duct Lock Sealant - 5 Gallon Pail
5068	DLSN-52	Duct Lock Sealant - 52 Gallon Pail

PROPERTIES	
TYPE	Butyl Rubber, resins, inert pigments
SOLIDS	90% Approximate
WEIGHT	12-13 lbs./gal.
COLOR	Grey
ODOR	Petroleum Naptha
VOC	72 gms/ltr
VISCOSITY	130,000 to 165,000 cps Brookfield
FLAMMABILITY	Flammable
EFFECT OF FREEZING	None
STORAGE LIFE	One Year (unopened drum or bucket)
CLEAN WITH	Small Spills: Mineral Spirits; Large Spills absorbents like clay

PRESSURIZED SELF-CONTAINED CANISTERS

PAB40 - PORTABLE ADHESIVE CANISTER - BLACK

DUAL PURPOSE: LINER ADHESIVE & EDGE COATING**!



PAB40 & PAB187 are web type, high solids, general purpose adhesives which bonds well to a wide variety of substrates, with one side or two side applications. This black liner adhesive can also be used as an effective edge coating**. When using as an edge coating, use the edge coating gun tip.

- Dual purpose liner adhesive and edge coating
- Quick tack
- Flexible
- Non-wrinkling
- Waterproof

ITEM#	CODE	DESCRIPTION
5087	PAB40	40# Portable Adhesive Canister - Black Solvent Base
5108	PAB187*	187# Portable Adhesive Canister - Black Solvent Base
Guns, hoses and tips sold separately - please see page 11.		

*PAB187 RETURNABLE CYLINDER - For free pick up call: (770) 386-6961 or fax (770) 386-0615

**Where allowed by code and inspection authorities.

PROPERTIES	
TYPE	Synthetic Polymer
APPLICATION TEMPERATURE	65° F - 95° F
VOC	<80 gms./ltr.
COLOR	Black
ODOR	Mild Solvent/wet, none/dry
FLAMMABILITY	Flammable
STORAGE LIFE	15 months
CLEAN WITH	Mineral Spirits/Citrus Cleaner
METHOD OF APPLICATION	Attach spray hose and spray gun then fully open valve on canister. Hold spray gun tip 6 to 10 inches from surface to be covered, always at a 90° angle to surface. Apply even coats. Do not allow it to concentrate or puddle in one area. For best performance, use this product at room temperature.
Extremely flammable, vapor harmful	

PAC40 - PORTABLE ADHESIVE CANISTER - CLEAR

LOW VOC & NO METHYLENE CHLORIDE (DICHLORALMETHANE)!



PAC40 is a web type, high solids, general purpose adhesive which bonds well to a wide variety of substrates, with one side or two side applications.

- Low VOC
- No Methylene Chloride (Dichloralmethane)
- Quick tack
- Flexible
- Non-wrinkling
- Waterproof

ITEM#	CODE	DESCRIPTION
5094	PAC40	Portable Adhesive Canister - Clear Solvent Base
Guns, hoses and tips sold separately - please see page 11.		

PROPERTIES	
TYPE	Synthetic Polymer
APPLICATION TEMPERATURE	65° F - 95° F
VOC	<80 gms./ltr.
COLOR	Clear
ODOR	Mild Solvent/wet, none/dry
FLAMMABILITY	Flammable
STORAGE LIFE	15 months
CLEAN WITH	Mineral Spirits/Citrus Cleaner
METHOD OF APPLICATION	Attach spray hose and spray gun then fully open valve on canister. Hold spray gun tip 6 to 10 inches from surface to be covered, always at a 90° angle to surface. Apply even coats. Do not allow it to concentrate or puddle in one area. For best performance, use this product at room temperature.
Extremely flammable, vapor harmful	

PAW40 - PORTABLE ADHESIVE CANISTER - CLEAR

LEED COMPLIANT - NO ODS, NO VOC, NO CHLORINATED SOLVENTS



PAW40 is an acrylic water based, pressure sensitive adhesive specially formulated for duct liner applications. PAW40 has an aggressive tack, sprays on white and dries clear.

- LEED Compliant
- Non-flammable
- No ODS
- No VOC
- No chlorinated solvents
- Aggressive tack
- Sprays on white, dries clear

ITEM#	CODE	DESCRIPTION
5091	PAW40	Portable Adhesive Canister - Clear Solvent Base
Guns, hoses and tips sold separately - please see page 11.		

PROPERTIES	
TYPE	Synthetic Polymer
APPLICATION TEMPERATURE	65° F - 95° F
VOC	0 gms./ltr.
COLOR	Sprays on White, dries Clear
ODOR	Slight Acrylic/wet, none/dry
FLAMMABILITY	Non-Flammable
STORAGE LIFE	12 months
CLEAN WITH	Mineral Spirits/Water
METHOD OF APPLICATION	Hold spray gun tip 6 to 12 inches away from the surface at a 90° angle to surface. Spray an even coat of the PAW40 adhesive using a swift steady motion. For best results, wait for 5-20 minutes.

For canister disposal instructions, please visit our website at: www.durodyne.com/AdhInsAhes.php

INSULATION ADHESIVES, DUCT SEALERS, SILICONES AND SPRAY PRODUCTS CATALOG

SILICONES AND ROOF PATCH SEALANT

ALUMINUM, BRONZE, CLEAR & WHITE



A superior quality silicone sealant for HVAC/R applications. Available in Aluminum Gray, Bronze, Clear, and White colors. Cures upon exposure to moisture in the air.

- Long-lasting, weather-resistant seals
- Exhibits excellent adhesion
- Excellent UV Resistance

ITEM#	CODE	DESCRIPTION
5110	SSW-C	White Silicone Duct Sealer
5111	SSC-C	Clear Silicone Duct Sealer
5112	SSA-C	Aluminum Silicone Duct Sealer
5115	SSB-C	Bronze Silicone Duct Sealer

PROPERTIES	
SERVICE TEMP.	-60°F to 400°F
APPLICATION TEMP.	10°F to 100°F
TACK FREE TIME	Less than an hour
FULL CURE	24 hours (Cures approx 1/8 in 24hrs)
PAINT-OVER TIME	Not Paintable
JOINT MOVEMENT	± 25%
CLEAN UP	Mineral Spirits, Acetone or Isopropyl Alcohol
WEIGHT	8.75 +/- 0.25/gal.
ODOR	Vinegar (Acetic Acid)
CONSISTENCY	Smooth, viscous paste
VOC	<3% wt, <30g/L
BASE POLYMER	Proprietary Siloxane Blend
FREEZE/THAW STABILITY	5 Cycles
SHELF LIFE	2 Years at 72°F
ARTIFICIAL WEATHERING	No change at 15,000 hrs QUV
STORAGE	40°F to 90°F – Original Container

HEAT RESISTANT - RED



A one-component, non-slumping 100% silicone sealant that cures to a rubbery solid at room temperature upon exposure to water vapor in the air.

- Formulated to perform at temperatures up to 500°F continuous & 600°F intermittent exposure.

ITEM#	CODE	DESCRIPTION
5113	SSR-C	Red Silicone Duct Sealer

PROPERTIES	
SERVICE TEMP.	-60°F to 500°F (600°F intermittent)
APPLICATION TEMP.	10°F to 100°F
TACK FREE TIME	Less than an hour
FULL CURE	24 hours
PAINT-OVER TIME	Not Paintable
JOINT MOVEMENT	± 25%
CLEAN UP	Mineral Spirits
WEIGHT	8.50/gal.
COLOR	Red
ODOR	Acetic Acid (Vinegar)
VOC	<3% wt, <30g/L
BASE POLYMER	Proprietary Siloxane Blend
FREEZE/THAW STABILITY	5 Cycles
SHELF LIFE	2 Years at 72°F
ARTIFICIAL WEATHERING	No cracking at 10,000 hrs QUV
STORAGE	40°F to 90°F

ROOF PATCH SEALANT - BLACK



Roof Patch Sealant is ideal for waterproofing, repairing and sealing roofs, shingles and flashings around chimneys and skylights. It provides a durable, flexible and weather resistant seal for cracks and joints in asphalt driveways, parking lots and more.

- Excellent adhesion
- Weather resistant
- Durable
- Flexible
- Prevents water and frost damage

ITEM#	CODE	DESCRIPTION
5114	SRS-C	Roof and Blacktop Sealer

PROPERTIES	
SERVICE TEMP.	-40°F to 180°F (-40°C to 82°C)
APPLICATION TEMP.	40°F to 100°F (5°C to 38°C)
TACK FREE TIME	24 hours
FULL CURE	7 days (Normal Conditions)
CLEAN UP	Mineral Spirits or Kerosene before cure
WEIGHT	9.60 +/- 0.50/gal.
COLOR	Black
ODOR	Solvent
CONSISTENCY	Heavy Bodied Textured Paste
VOC	< 20% by weight
BASE POLYMER	Petroleum Asphalt Blend
FREEZE/THAW STABILITY	5 Cycles
SHELF LIFE	1 Year Unopened at 72°F
ARTIFICIAL WEATHERING	No Crack at 5,000 hrs QUV
STORAGE	40°F to 90°F

SPRAY PRODUCTS

DTWA - WEB ADHESIVE



This 4 1/2" wide web spray adhesive provides a versatile and strong bonding formula which is excellent for use on fiberglass, rubber and cotton liners. Non-chlorinated and non-ozone depleting.




ITEM#	CODE	DESCRIPTION
5070	DTWA	Web Adhesive

PROPERTIES	
BASE	Synthetic resin(s) and copolymer mixture
SOLIDS	25+ _ 0.2%
SOLVENT SYSTEM	Aliphatic (Hexane) and Ketone (Acetone)
COLOR	White
ODOR	Strong mint-like/wet, none/dry
VOC	378 gms/ltr
FLAMMABILITY	Extremely Flammable when wet
STORAGE LIFE	1 year @ 70°F
CLEAN WITH	Mineral spirits
BONDING TIME	10 seconds to 2 minutes

DYN-O-COAT - EDGE COATING



Dyn-O-Coat combines the flexibility of sealants with the quick drying advantage of aerosol to bring you a highly efficient Edge Coating. Simply spray on to encapsulate rips, tears and cut edges. It is ideal for use on internally lined ductwork and rigid fiberglass ductwork.



ITEM#	CODE	DESCRIPTION
5069	DCEC	Dyn-O-Coat Edge Coat

PROPERTIES	
TYPE	Synthetic rubber
SOLIDS	25+ _ 0.2%
SOLVENT SYSTEM	Aliphatic (Hexane) and Ketone (Acetone)
COLOR	Black
ODOR	mint-like/wet, none/dry
VOC	451 gms/ltr
FLAMMABILITY	Extremely Flammable when wet
STORAGE LIFE	1 year @ 70°F
CLEAN WITH	Mineral spirits
BONDING TIME	dry to touch in 10-15 minutes depending on humidity, temperature, substrates and application thickness. Fully cures in 1 hour.

ASA-WFT - INSULATION ADHESIVE



Duro Dyne ASA-WFT is a fast tacking, quick bonding solvent base aerosol spray duct liner adhesive. It may be used for bonding low and high density duct liner or wrap to the interior or exterior of metal ductwork. ASA-WFT bonds rubber, fiberglass, plastic, and other types of insulation to steel. ASA-WFT is non-flammable.

ITEM#	CODE	DESCRIPTION
5015	ASA-WFT	Insulation Adhesive


PROPERTIES	
TYPE	Solvent Cement
SOLIDS	25
WEIGHT	10.4 lbs./gal.
SOLVENT SYSTEM	Aliphatic (Hexane) and Ketone (Acetone)
COLOR	Amber
ODOR	None
VOC	55%
VISCOSITY	1960 CPS
FLAMMABILITY	Adhesive-Non Flammable; Propellant - Flammable
EFFECT OF FREEZING	No Damage
STORAGE LIFE	1 year @ 70°F
SUGGESTED SURFACE PREPARATION	Surfaces must be clean and dry, free of dust, dirt, grease, oil and other foreign material.
METHOD OF APPLICATION	Aerosol Spray

STRIPPER - SPRAY MAINTENANCE SYSTEM



Galvanizing build-up is bad for job quality, production efficiency and profits. The Stripper is a degalvanizing agent that strips your machine of messy build up. It sprays on red for easy visibility. Simply Spray it on rollers of forming machines and press dies and the special ingredients get right to work and dissolve galvanized build up. Then high quality lubricants take over to keep precision machines running smoothly... at peak efficiency... day in, day out.

ITEM#	CODE	DESCRIPTION
27147	Stripper	Degalvanizing & Lubricating Spray

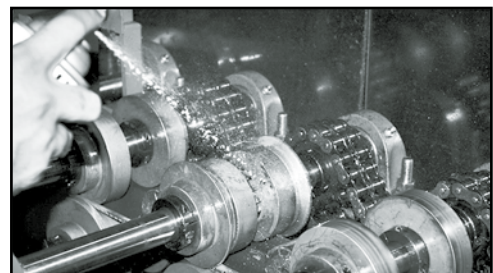

Spray The Stripper at those points where galvanizing tends to build up on your machines. The special cleaning ingredients get right to work softening up deposits.

SPRAY PRODUCTS (CONTINUED)

DGAR - SOLVENT & ADHESIVE REMOVER



A heavy-duty, fast-acting, flush action aerosol that quickly cuts through and removes tough grease, oil, tar, asphalt, wax, ink, fresh paint and more! Provides high solvency and a powerful spray that blasts away grime then dries fast and residue-free.

- **No Chlorinated Solvents**
- **Hexane Free**
- **Low VOC**
- **VOC Compliant in all 50 U.S. States**
- **Dries Fast and residue free**

ITEM#	CODE	DESCRIPTION
5122	DGAR	Solvent Degreaser

PROPERTIES	
TYPE	Flush Action Aerosol
COLOR	Colorless
ODOR	Acetone and citrus
VOC	10%
FLAMMABILITY	Extremely flammable
EFFECT OF FREEZING	Will not affect the stability. It will lower the pressure and forcefulness of the spray until the can warms up.
STORAGE LIFE	1 year
APPLICATION TEMPERATURE	40-120° F
METHOD OF APPLICATION	Spray liberally to coil lines and machinery to cut through tough grease, oil, tar and grime.

This degreaser is not for use on roll formers, bearings or any greased or lubricated parts.

SBCC - SOLVENT BASED COIL CLEANER



A fast-drying, flush-action solvent that blasts grease, dirt, lint, and grime from air conditioner, heater, dryer, and refrigeration coils. Improves airflow and reduces power consumption. Helps maintain optimum unit efficiency. Requires no rinsing.

- **Fast Drying**
- **Helps Reduce Energy Costs**
- **No Ozone Depleting Substances**

ITEM#	CODE	DESCRIPTION
5123	SBCC	Solvent Based Coil Cleaner

PROPERTIES	
TYPE	Solvent Based
COLOR	Colorless
ODOR	Sweet ether like
VOC	0%
FLAMMABILITY	Non-flammable
EFFECT OF FREEZING	Will not affect the stability. It will lower the pressure and forcefulness of the spray until the can warms up
STORAGE LIFE	1 year
APPLICATION TEMPERATURE	40-120° F
METHOD OF APPLICATION	Spray on air conditioners, heating coils, ice makers, refrigerators and more to keep units running smoothly and at optimum efficiency levels.

FACC - COIL CLEANER WITH FOAMING ACTION



A portable, non-acid, foam cleaner that blasts deep into air conditioner, heater, refrigeration and dryer coils to loosen and remove grease, dirt, lint and grime. Contains natural enzymes for continuous cleaning and breakdown of organic coil contaminants. A strong directional spray helps force foam into coil air spaces. Then, the Bio-Enzymatic action removes stain and odors associated with mold and fungus.

- **No Rinse**
- **Non-Acid**
- **No Harsh Fumes**
- **Improves Air Flow**
- **Reduces Energy Consumption**

ITEM#	CODE	DESCRIPTION
5121	FACC	Coil Cleaner with Foaming Action

PROPERTIES	
TYPE	Water Based
COLOR	Off-white
ODOR	Fresh
VOC	3.5%
EFFECT OF FREEZING	Keep from freezing. Freeze thaw cycles could be detrimental to the surfactant package in the product.
STORAGE LIFE	1 year
APPLICATION TEMPERATURE	70-100° F
METHOD OF APPLICATION	Spray on air conditioners, heating coils, ice makers, refrigerators and more to keep units running smoothly and at optimum efficiency levels.

ADHESIVE APPLICATING SYSTEMS

SUPER SPRAYFAST UNIVERSAL

ADHESIVE APPLICATOR FOR USE WITH WIT, WITLV-AS, WSA AND SSG ADHESIVES



The revamped Universal version of our Super Sprayfast Adhesive Applicator (SSFU) machine makes it possible to use the same applicator on either a 5 gallon bucket or 55 gallon drum. In addition, it now also includes a new flush kit for easy clean up and maintenance. The SSFU features an acetal/teflon diaphragm pump circulating system and surge tank to provide quick, easy and even spray, with minimal overspray.

ITEM#	CODE	DESCRIPTION
5151	SSFU	Super Sprayfast Universal for use with 5 gallon pail and 55 gallon drum of water-based adhesive



GBAC

ADHESIVE APPLICATOR FOR USE WITH WIT, WIT-LV AND WSA ADHESIVES




The GBAC applies Duro Dyne WIT or WSA water base adhesive to insulation in preparation for application to sheet metal. It requires 110v service fused for 15 amps. A source of air is required. Specify the direction of work flow when ordering.

ITEM#	CODE	DESCRIPTION
39171	GBAC	Roto Bonder with Circulating System - left to right flow
39250	GBAC	Roto Bonder with Circulating System - right to left flow

CAULK GUN

Heavy-duty professional quality skeleton caulking gun with “no drip” feature, spout cutter, seal puncture tool and ladder hook for hanging when not in use. 1/10 gallon barrel holds most standard cartridges. Use for medium to heavy applications of glazing, sealants, caulks and other cartridge products.

ITEM#	CODE	DESCRIPTION
5024	SG1	Caulk Gun

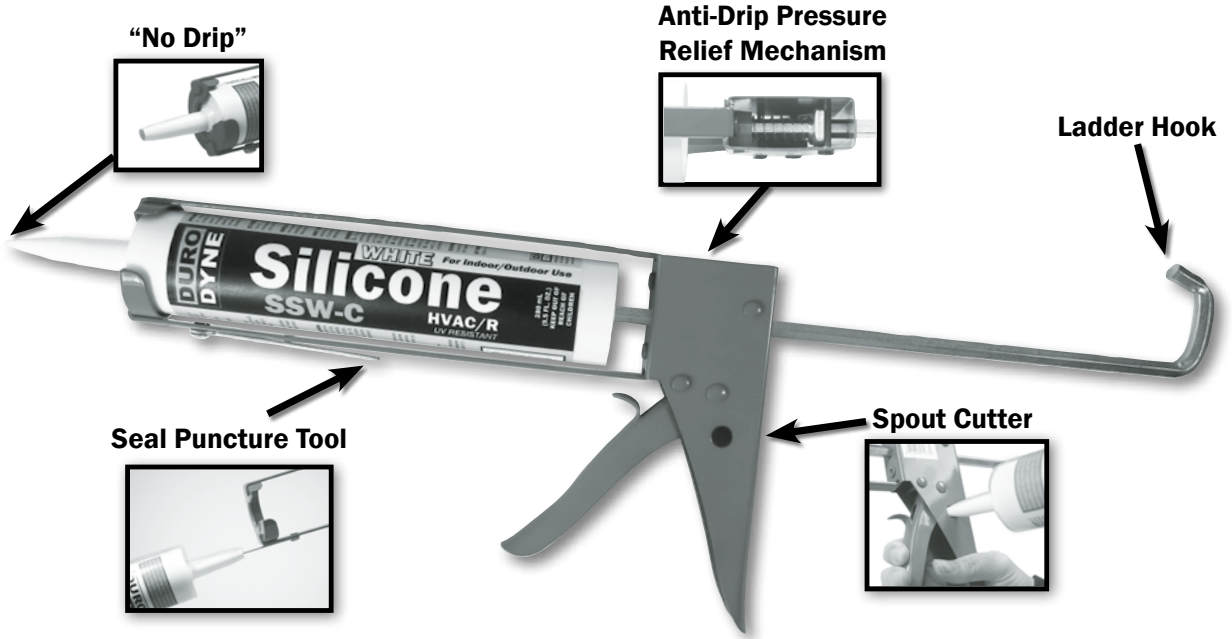

CANISTER ACCESSORIES



Duro Dyne Adhesive Canisters utilize a gun and hose assembly to apply the adhesive to insulation. The Hose, Gun and Gun Tip are sold separately from the canisters. Ordering Information about these accessories are available on all Canister Literature Sheets.

ITEM#	CODE	DESCRIPTION
5097	PAC12H	12 ft Canister Hose
5098	PAC25H	25 ft Canister Hose
5099	PAG	Canister Gun with Solvent Based Tip
5100	PAGTW	Canister Gun Water Base Spray Tip
5101	PAGTS	Canister Gun Solvent Base Spray Tip
5060	PABT	Canister Gun Edge Coat Tip
5109	PABF	Canister T-Fitting

For more information on canisters, please see page 6.


BRISTLE BRUSHES

Stapled together for longevity. Multiple sizes available.



ITEM#	CODE	DESCRIPTION
5008	BB1	1 in Bristle Brush
5014	BB15	1-1/2 in Bristle Brush
5022	BB2	2 in Bristle Brush
5028	BB3	3 in Bristle Brush
5039	BB4	4 in Bristle Brush

Please Visit Our Website
www.durodyne.com
for the most current product information.

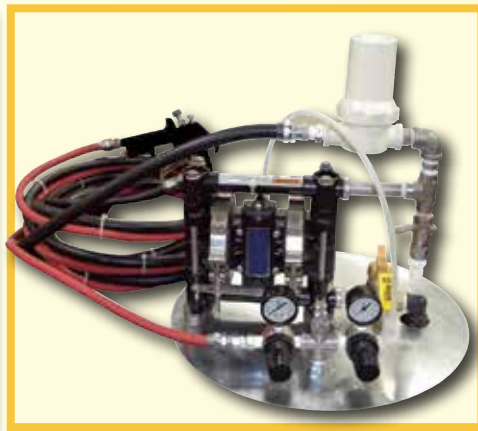

Duro Dyne Insulation Adhesives, Duct Sealers, Silicones
and Spray Products are manufactured in the U.S.A.



© Duro Dyne Corp.
Printed in USA 1/26/17
BB005404

Duro Dyne East Division, Bay Shore, NY	631-249-9000	Fax: 631-249-8346
Duro Dyne Midwest Division, Hamilton, OH	513-870-6000	Fax: 513-870-6005
Duro Dyne West Division, Fontana, CA	562-926-1774	Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada	514-422-9760	Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com		