



INSTALLER NOTE

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND VALVE INCLUDING ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL IT IS RECOMMENDED THAT SHUT OFF VALVE AND SUPPLY TUBING SUPPLIED BY OTHERS BE NON-METALLIC.

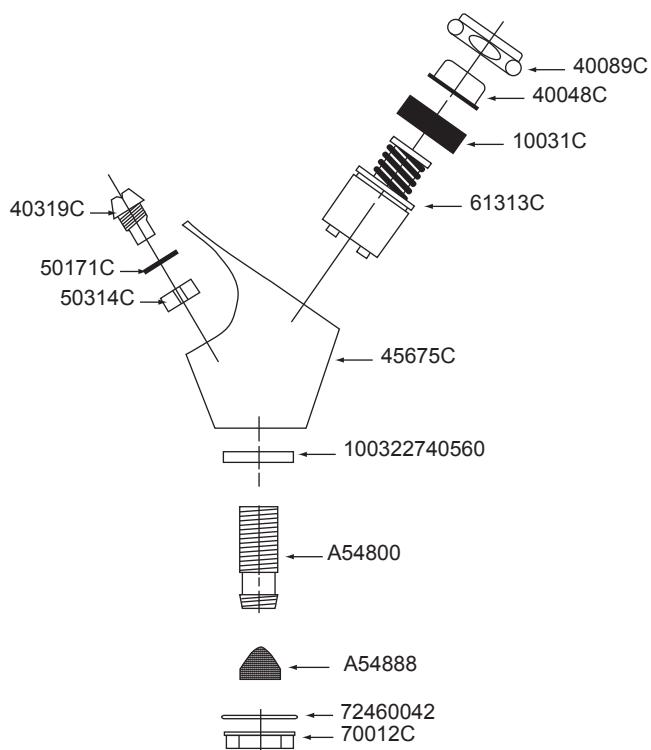



MAKE 13" (330mm) DIAMETER
CUTOUT IN DESIRED LOCATION
ON COUNTERTOP.

INSTALL BUBBLER ASSEMBLY
TO FOUNTAIN. ALIGN RECESS IN
UNDERSIDE OF BUBBLER
WITH DIMPLE IN FOUNTAIN.



APPLY CAULK (NOT FURNISHED)
AROUND CUTOUT AND WASTE
OPENING. PLACE FOUNTAIN OVER
OPENING AND DROP IN STRAINER.

FROM UNDERSIDE . . .
POSITION AND SECURE
TIEDOWN BRACKET
USING WASTE FITTING.



USE SCREWS WITH NUTS TO
TIGHTEN UNIT TO COUNTERTOP
WIPE OFF EXCESS CAULKING.

PARTS FOR LK142 BUBBLERS

PART NUMBER	PART DESCRIPTION
10031C	Retaining Nut
40048C	Button
40089C	Retaining Nut
40319C	Orifice
100322740560	Washer
50171C	"O" Ring
50314C	Flow Straightener
45675C	Body
A54800	Nipple
A54888	Screen
61313C	Regulator Cartridge
70012C	Locknut
72460042	Washer