




Straight 90° and Zinc Diecast Liquid-Tight Conduit Connectors

- Available 3/8" through 4"
- For use with both Metallic Liquid Tight Conduit and Nonmetallic Liquid Tight Type B
- Zinc die cast construction resists salt water, weak acids, gasoline, alcohol, oil, grease, & common solvents
- Resistant to outdoor weather conditions
- No disassembly required. Instead, the installer simply twists the conduit or tubing onto the ferrule, tightening the domed sealing nut. The completed assembly can then be secured in the chassis by the locknut (or first secure the connector into an NPT-threaded hole)
- No threading of the conduit or tubing required to install, eliminating the possibility of cutting the conduit & creating leak paths
- Complete conduit/connector system is reusable. Conduit will not wind tight onto the connector during assembly & can be easily removed by pulling while turning clockwise
- Suitable for indoor/outdoor use; for original equipment manufacturers or field installers
- Lower installed cost
- "O" Ring & zinc locknut included

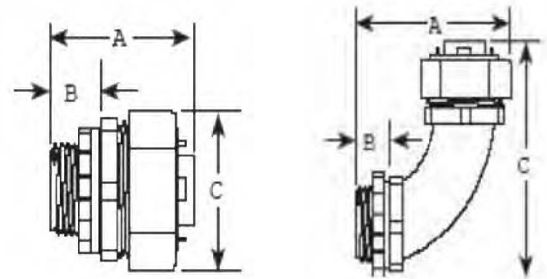


Global No.	Size	Type	K.O. Size	Dim. A	Dim. B	Dim. C	Case Qty
8042M	1/2"	Straight	1/2"	1.58"	1.18"	.53"	100
8043M	3/4"	Straight	3/4"	1.69"	1.57"	.58"	100
8044M	1"	Straight	1"	2.06"	1.81"	.58"	50
8045M	1/2"	90°	1/2"	2.24"	2.46"	.53"	100
8046M	3/4"	90°	3/4"	2.47"	2.79"	.55"	100
8047M	1"	90°	1"	3.46"	3.86"	.58"	50



Non-Metallic Fittings

Sealproof® Nonmetallic Liquid-Tight Screw-on Connectors

- Listed under the Underwriter's Laboratories
- Available 3/8 inch through 2 inch
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents
- No disassembly required. Instead, the installer simply pushes the conduit or tubing onto the ferrule, tightening the domed sealing nut. The completed-assembly can then be secured in the chassis by the locknut (or first secure the connector into a NPT-threaded hole)
- No threading of the conduit or tubing required to install, eliminating the possibility of cutting the conduit and creating leak paths
- Complete conduit/connector system is reusable. Conduit will not wind tight onto the connect orduring assembly and can be easily removed by pulling while turning in a clockwise direction
- Suitable for indoor/outdoor use; for original equipment manufacturers or field installers
- Lower installed cost
- Molded of type nylon 6. Flammability classification 94V-2: temperature index 125°C
- Smooth internal surfaces for easier wire installation-around corner angles
- One-piece or multi-piece design
- "0" Ring and steel locknut included

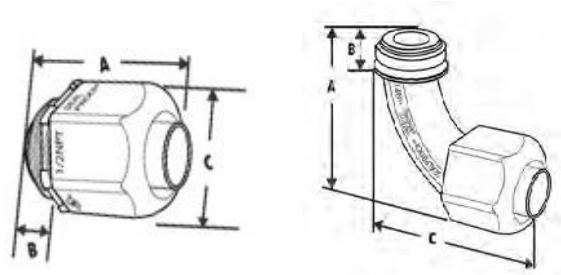

Global No.	Size	Type	K.O. Size	Dim. A	Dim. B	Dim. C	Case Qty
8042	1/2"	Straight	1/2"	1.750"	0.500"	1.250"	100
8042X	1/2"	Straight Multi-Piece	1/2"	2.000"	0.540"	1.400"	100
8043	3/4"	Straight	3/4"	1.800"	0.625"	1.500"	100
8043X	3/4"	Straight Multi-Piece	3/4"	2.200"	0.635"	1.700"	100
8044	1"	Straight	1"	—	—	—	50
8045	1/2"	90°	1/2"	1.875"	0.500"	3.125"	100
8045X	1/2"	90° Multi-Piece	1/2"	2.120"	0.500"	3.120"	100
8046	3/4"	90°	3/4"	2.375"	0.625"	3.500"	100
8046X	3/4"	90° Multi-Piece	3/4"	2.500"	0.520"	3.600"	100
8047	1"	90°	1"	—	—	—	50