



Camerton™
Service Sink
K-12867

Features

- Vitreous china.
- Wall-mount.
- Deep squared basin.
- No faucet holes; requires wall-mount faucet.
- 1½" (38 mm) top spud.
- Blow-out action flushing rim.
- 21-1/2" (546 mm) x 25" (635 mm)
- Sink drain with strainer sold separately.



Recommended Products/Accessories

K-8935 Stainless Steel Rim Guard

K-13864 Sink Strainer

K-23726 Drain treatment

K-23725 Cast iron cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper

Included Components

Additional Components:

1 1/2" (38mm) top stud

Codes/Standards

ASME A112.19.2/CSA B45.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description



0 White



Camerton™
Service Sink
K-12867

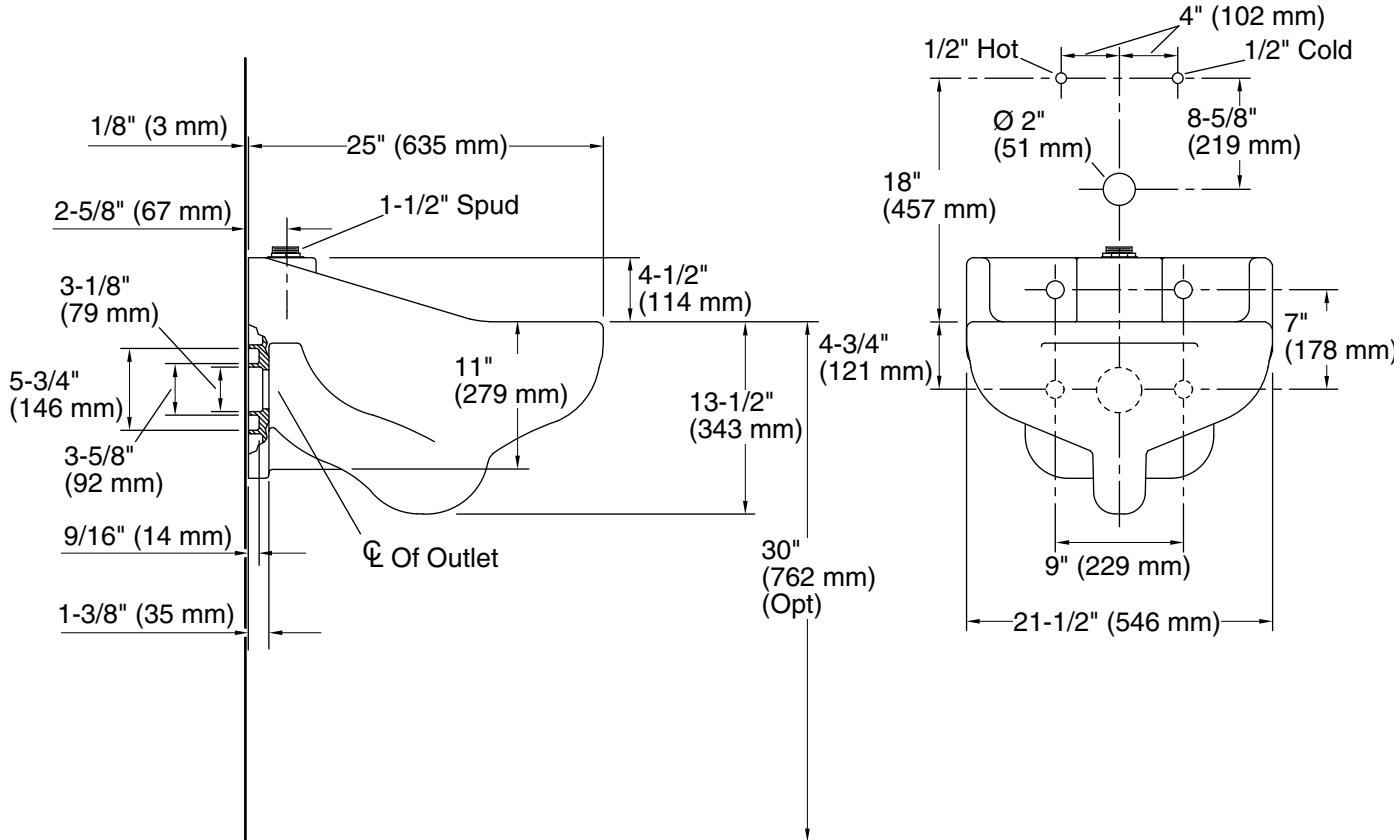

Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Top-mount

Bowl area (Only):
Length: 18" (457 mm)
Width: 18" (457 mm)
Water depth: 6-1/4" (159 mm)

Number of deck holes: 1

Notes

Install this product according to the installation instructions.

Minimum flowing pressure required: 25 psi (172.4 kPa)

Minimum flow rate required: 25 gpm (94.6 lpm)