

Features

- Professional-style faucet combined with pull-down functionality for maximum reach within the sink space
- Single lever handle is simple to use and makes adjusting water temperature easy
- Sweep® spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean
- Two-function sprayhead with touch-control allows you to switch from aerated stream to Sweep® spray
- High-arch and unique exposed-spring design provide exceptional control and flexibility
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- DockNetik® magnetic docking system securely locks sprayhead into place when not in use
- Spring and sprayhead detach for easy cleaning
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Box includes: Assembled faucet, supply lines, escutcheon plate

Material

- KOHLER finishes resist corrosion and tarnishing
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
- Spot Repel® finish resists fingerprints, smudges, and water spots (Matte Black and Lacquered Vibrant Stainless finishes only)

Installation

- Installs with 1- or 3-hole sink (escutcheon plate included)
- Flexible supply lines and quick-connect fittings simplify installation
- Longer shank works with countertops up to 2-1/2" (63.5 mm) thick and is easy to install



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	LVS	Lacquer Vibrant Stainless

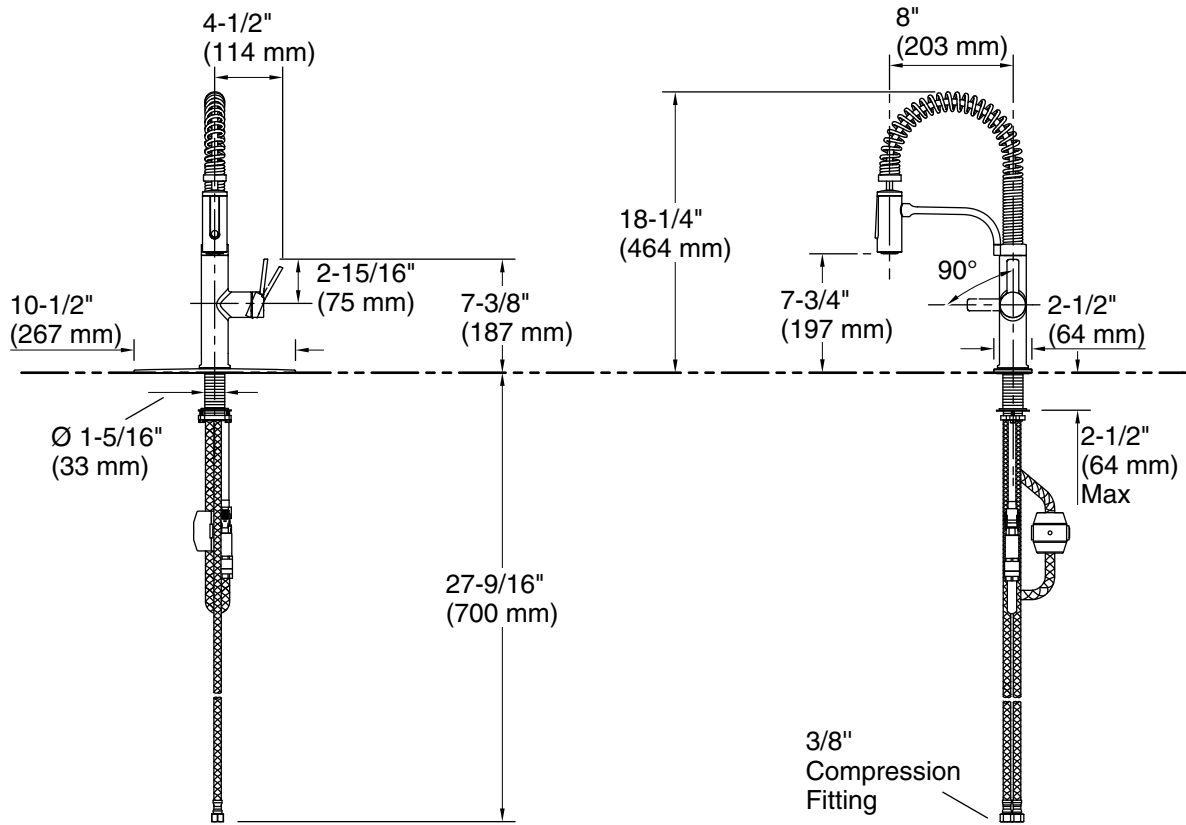

Technical Information

All product dimensions are nominal.

Faucet flow rate: 1.5 gal/min (5.7 l/min)

Spout:

Spout reach: 8" (203 mm)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.