



Branham™

Full stall washout urinal with rear spud
K-25039-R

Features

- Full-stall wash-down urinal
- 0.5 or 1.0 gpf (1.9 or 3.8 lpf)
- Lip of urinal installs below floor level for easier cleaning around fixture
- Full length sidewalls provide added privacy
- External trapway
- 3/4" (19 mm) rear spud
- Drain sold separately

Material

- Vitreous china

Installation

- Replaces K-4920-R

Required Products/Accessories

[K-9172](#) Urinal Strainer
or
[K-9183](#) Urinal Strainer



ADA **CSA B651** **OB**

Codes/Standards

ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OB

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

0 White

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.



For the most current Specification Sheet, go to [www.kohler.com](#) USA or [www.kohler.ca](#) Canada

2-14-2025 14:52 - US/CA

THE BOLD LOOK
OF **KOHLER**®



Branham™
Full stall washout urinal with rear spud
K-25039-R

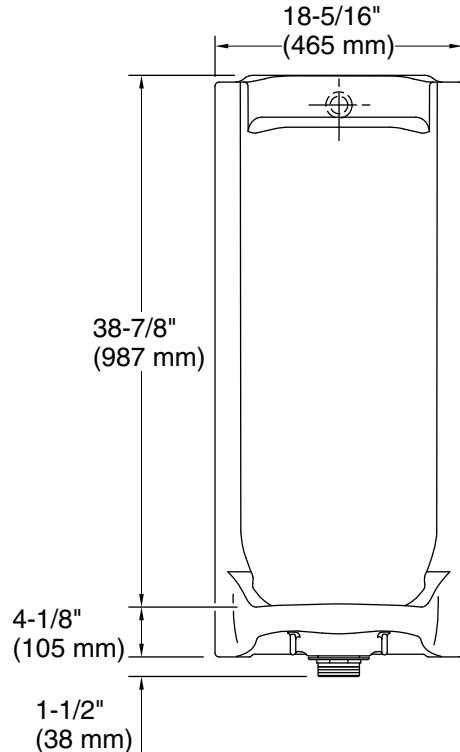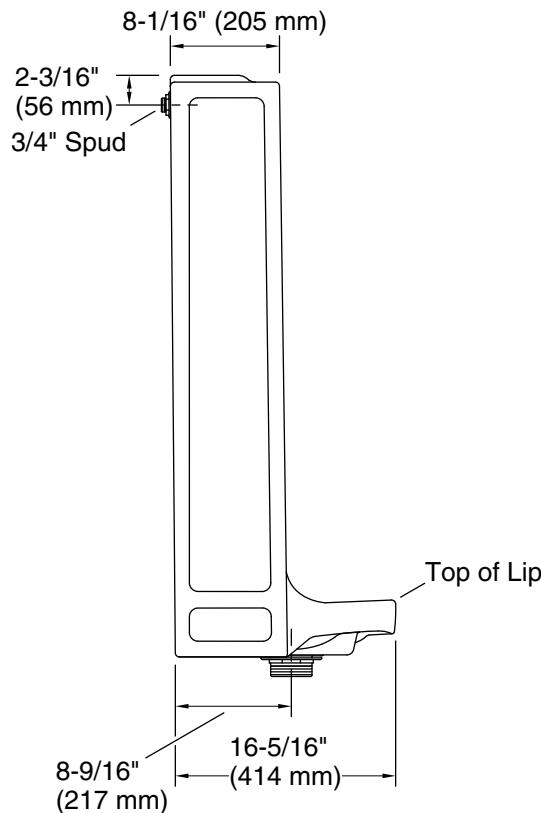

Technical Information

All product dimensions are nominal.

Spud size: 3/4, Inlet, Rear

Min. Water per flush: 0.5 gpf (1 lpf)

Flush:

Max. Water per flush: 1 gpf (3.8 lpf)

Designed for the above water use when installed with a water-saving flushometer.

Pressure and Supply Requirements

Fixture pressure min 20 psi (137.9 kPa)
(static):

Fixture pressure max (static): 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.