



Composed™

71-3/4" H pivot shower door with 3/8"-thick glass

K-27618-10L

## Features

- Frameless design emphasizes glass and creates a sleek, minimalist look
- Full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Innovative L-bracket secures the fixed panel in place and gives it a sturdy feel while also being unobtrusive to the showering space
- Continuous 7/8" (22 mm) high aluminum bottom threshold
- Back-to-back 11-1/2" (292 mm) vertical handles
- Coordinates with other products in the Composed® collection
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)

## Material

- Frameless, 3/8" (10 mm) thick Crystal Clear tempered glass
- Anodized aluminum prevents rust and corrosion

## Installation

- Fits opening widths 58" – 58-3/4" (1473 – 1492 mm)
- 3/4" (19 mm) width adjustment
- Out-of-plumb adjustability simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout
- Product ships in two boxes, offering easy handling
- For residential use only
- Not for use in hospitality

## Included Components

- 27717-10L 3/8" fixed panel glass and hardware
- 27718-10L 3/8" moving panel glass and hinges
- K-27678 11-1/2" shower door handle



## Codes/Standards

ANSI Z97.1  
CAN/CGSB-12.1  
CPSC 16CFR 1201

## Kohler® Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color   Code   Description

	SHP	Bright Polished Silver
	BL	Matte Black
	BNK	Anodized Brushed Nickel

## Available Glass Options


### Code   Description

L	Crystal Clear
---	---------------



Composed™

71-3/4" H pivot shower door with 3/8"-thick glass  
K-27618-10L

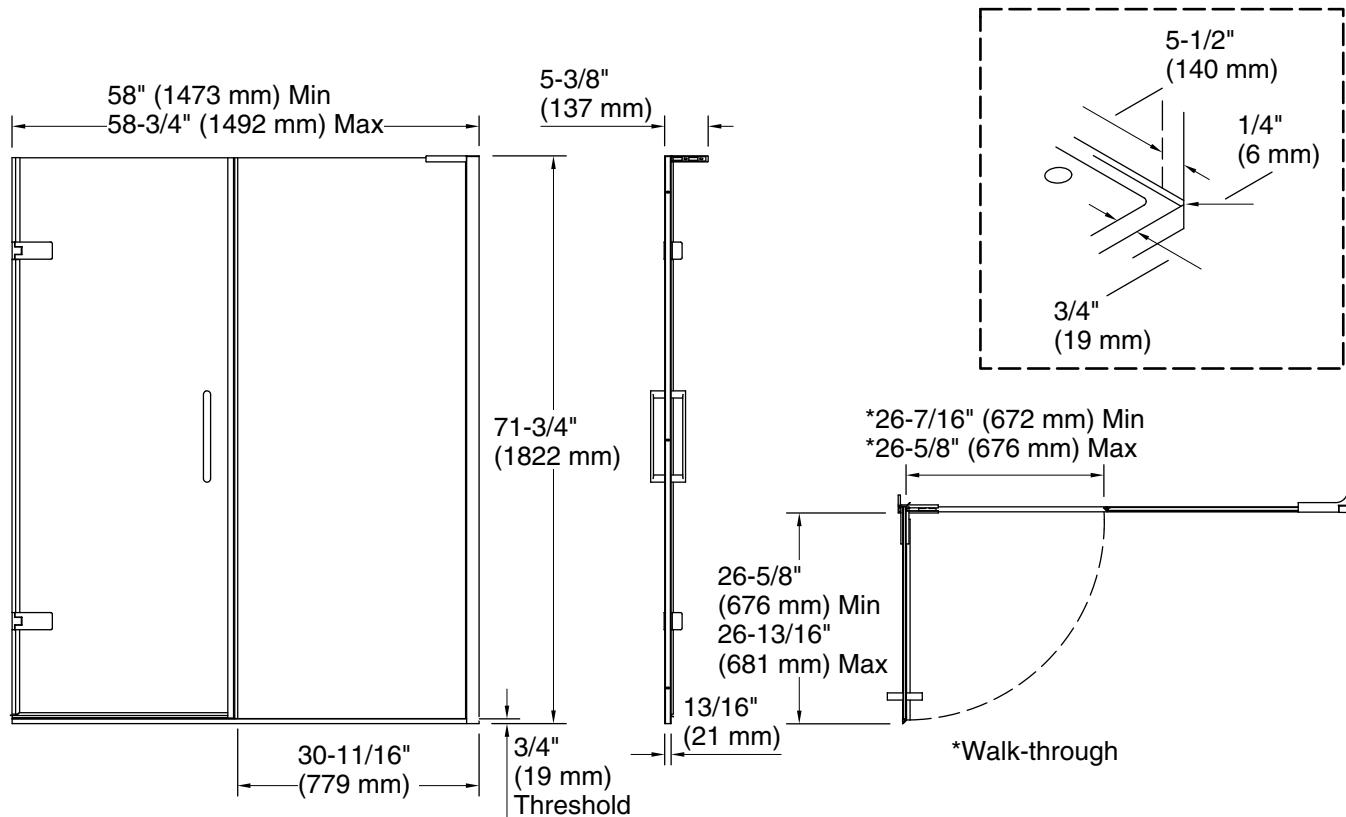

## Technical Information

All product dimensions are nominal.

Base-To-Wall 1/4" (6 mm)

Radius – Max:

Shower Ledge Min 3/4" (19 mm)  
Flat:

Shower Wall Min 5-1/2" (140 mm)  
Flat:

Wall Studs Required Yes  
for Door:

## Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 73-1/2" (1867 mm) to allow for installation clearance.