



# San Raphael® Comfort Height®

One-piece elongated 1.0 gpf chair height toilet  
**K-3597**

## Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.0 gpf (3.8 lpf).
- Equipped with Sloan FLUSHMATE® Pressure Vessel.
- Seat and lid included.



## Technology

- Pressure Lite® flushing technology provides commercial-grade flushing power while reducing water use.

## Installation

- Standard 12" (305 mm) rough-in.
- Supply line sold separately.

## Water Conservation & Rebates

- Eligible for consumer rebates in some municipalities.
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

## Recommended Products/Accessories

- K-75796 Cachet® Nightlight Quiet-Close™ Elongated toilet seat
- K-4108 C3®-230 Elongated bidet toilet seat
- K-5420 Low-Profile Bolt Caps
- 1023457 Wax Ring/Hardware Kit
- 1265114 Connector Hose
- K-23726 Drain treatment

## Included Components

### Additional Components:

- Bolt cap accessory pack
- Tank Accessory Pack
- Tank Cover
- Toilet Seat

**ADA** **CSA B651** **OBC**



## Codes/Standards

ASME A112.19.2/CSA B45.1

EPA WaterSense®

California Energy Commission (CEC)

ADA

CSA B651

OBC

## KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*




### Color   Code   Description

	0	White
	96	Biscuit
	95	Ice™ Grey
	G9	Sandbar
	58	Thunder™ Grey
	7	Black Black™



# San Raphael® Comfort Height®

One-piece elongated 1.0 gpf chair height toilet  
K-3597

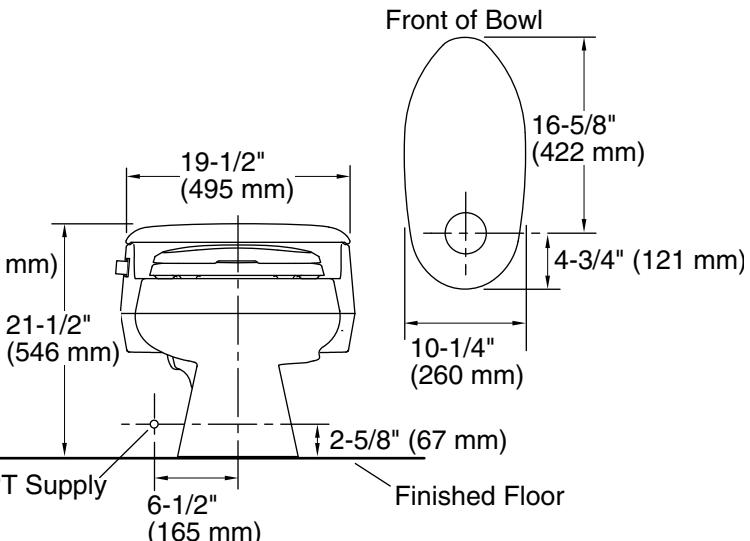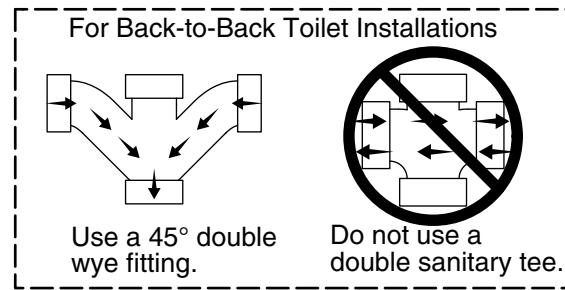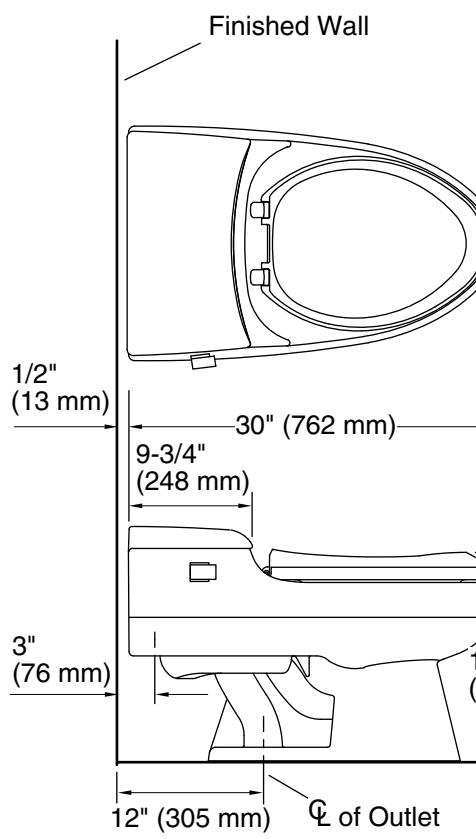

## Technical Information

All product dimensions are nominal.

Toilet type:	One-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1 gpf (3.8 lpf)
Water surface size:	9" x 7" (229 mm x 178 mm)
Rim to water surface:	5-7/8" (149 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

## Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

## Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)