



**Sunward®**  
66" x 42" drop-in whirlpool  
**K-6347**



## Features

- Single-speed whirlpool offers performance and value, with 6 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Oval basin creates a spacious bathing experience.
- Integral lumbar support and armrests offer extra comfort while bathing.
- Textured bottom surface.

## Material

- Acrylic.

## Hydrotherapy

- Whirlpool.

## Installation

- Reversible drain.
- Undermount.
- Drop-in or undermount.
- Smooth backside for easy handling and mounting of drain and overflow.

## Required Products/Accessories

K-11677 Bath Drain

## Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/whirlpool footstop, removable

K-24916 Wireless Music Kit

K-738 Under-Mount Install Kit - K-6346/K-6347

K-23726 Drain treatment

K-23732 Tub & shower cleaner

## Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

UL 1795

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color   Code   Description




0   White



96   Biscuit


**KOHLER**<sup>®</sup>

**Sunward®**  
66" x 42" drop-in whirlpool  
**K-6347**

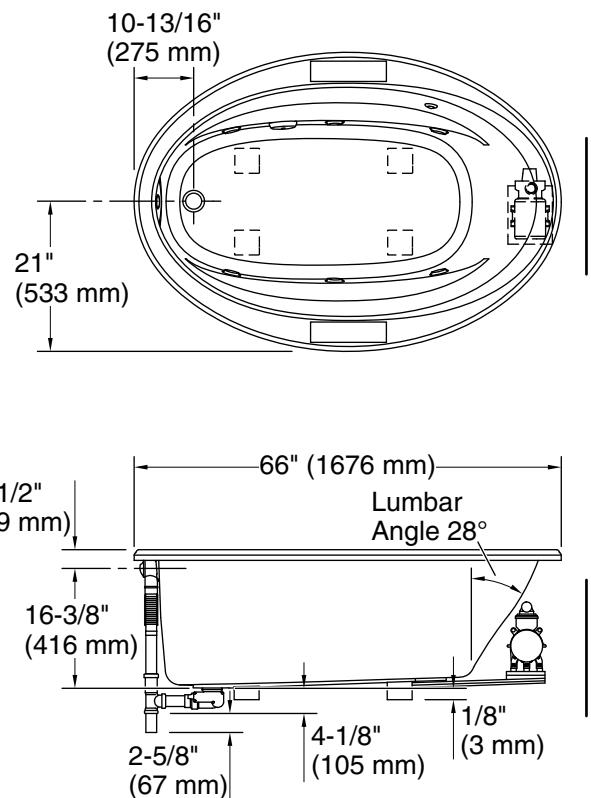


No change in measurements if connected with drain illustrated. (K-37382)

Recommended Faucet Location



Access Panel  
20" (508 mm) W x 15" (381 mm) H

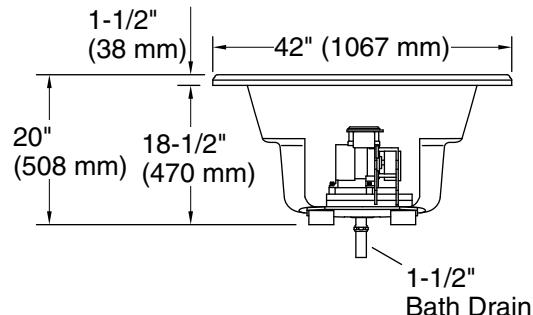

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	End
Basin area, bottom:	48-5/8" x 24-1/2" (1235 mm x 622 mm)
Basin area, top:	60" x 32-3/16" (1523 mm x 818 mm)
Minimum floor load:	34 lbs/ft <sup>2</sup> (166 kg/m <sup>2</sup> )
Water depth:	14-5/16" (364 mm)
Water capacity:	70 gal (265 L)
Template:	Drop-in, 1233384-7, not required, included Under-mount, 123, not required, not included
Electrical component rating:	Pump: 120 V, 7.5 A, 60 Hz
Pump speed:	Single

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

5-29-2021 20:26 - US/CA

THE BOLD LOOK  
OF **KOHLER**<sup>®</sup>