

Features

- Premium construction ensures durability and reliability
- 4-7/8" (124 mm) diverter spout with NPT connection
- Reversible 1/2" quarter-turn washerless ceramic disc valves
- Lever handles
- Includes showerhead with arm and flange

Required Products/Accessories

For wall-mount installation

K-302-K 1/2" Ceramic In-Wall Valve System

Optional Products/Accessories

56373 Deep Rough-in Kit




Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

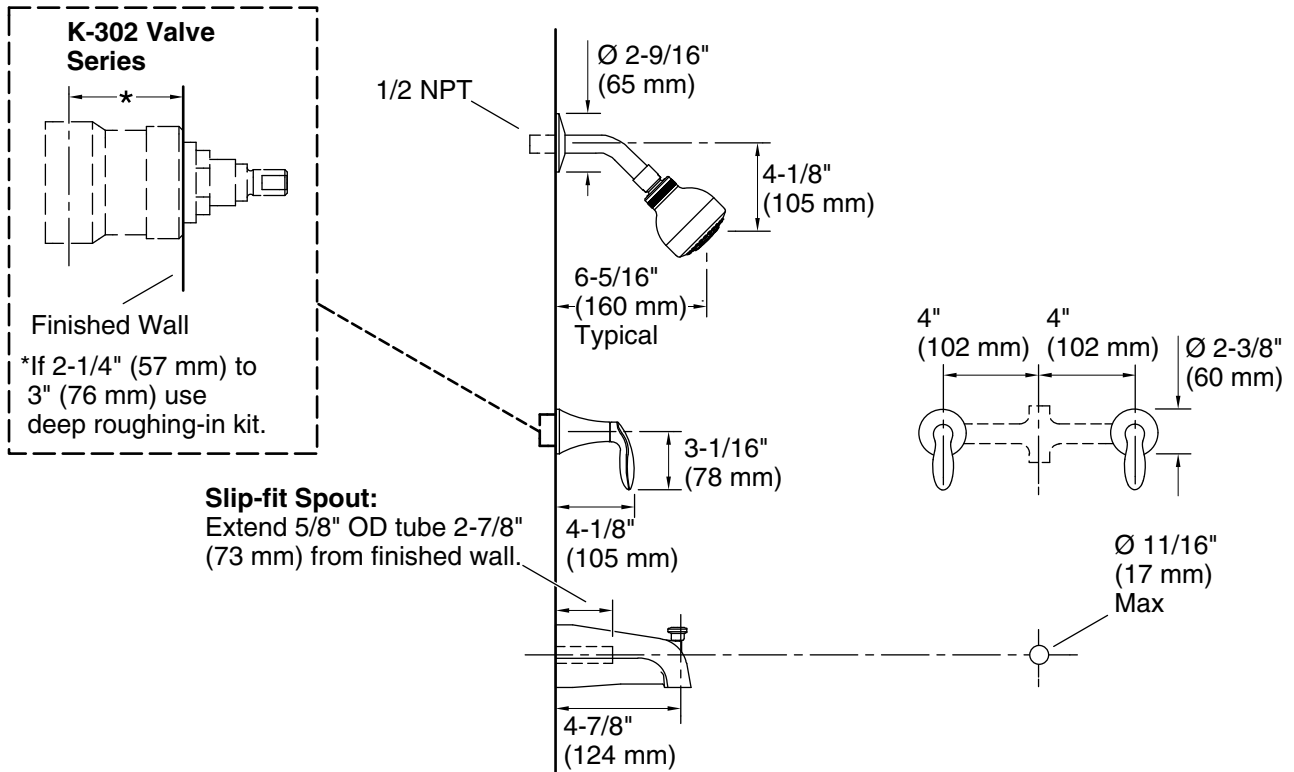

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 4-7/8" (124 mm)

Shower/Rainhead rated max flow: 2.5 gal/min (9.5 l/min)

Notes

Install this product according to the installation instructions.