




MORRIS CAT#: 12250
Heat Shrinkable Ring Terminals - #8 Wire,
5/16" Stud

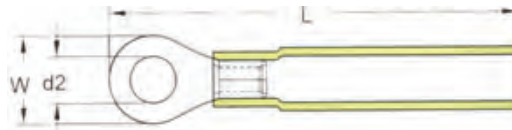

Features:

Heat Shrinkable Ring Terminals - #8 Wire, 5/16" Stud features include:

- Heat Shrinkable Ring Terminal Material: Electrolytic Copper
- Electro-Tin Plated for corrosion resistance
- Brazed Seam
- Serrated Barrel provides excellent electrical contact & resistance to pull-out forces
- Insulation Material: High Density PE Heat Shrink
- Maximum Electric Current: 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- Maximum Rating: 600 Volts
- Shrink Temp: 302°F (150°C)
- Resistant Temp: 14°F ~ 221°F (-26°C ~ 105°C)
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

MAXIMUM ELECTRIC CURRENT:

AWG	22	20	18	16	14	12	10
AMP	9	12	17	18	30	35	50

MAXIMUM ELECTRIC RATING: 600 Volts
SHRINK TEMP: 302°F (150°C)
RESISTANT TEMP: 14°F ~ 221°F (-10°C ~ 105°C)
INSULATION MATERIAL: High Density PE Heat Shrink
TERMINAL MATERIAL: Electro-Tin Plated Copper
FEATURES: Brazed Seam, Serrated Barrel

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	D2	W	L	BAG QTY	MASTER BAG QTY
I2250	RED	8	5/16	.591	1.693	100	-