


969* 1/2"-2"

ULTRAPRESS®

Brass Check Valve
200 psig @ 250°F †
Horizontal Swing, Press Ends

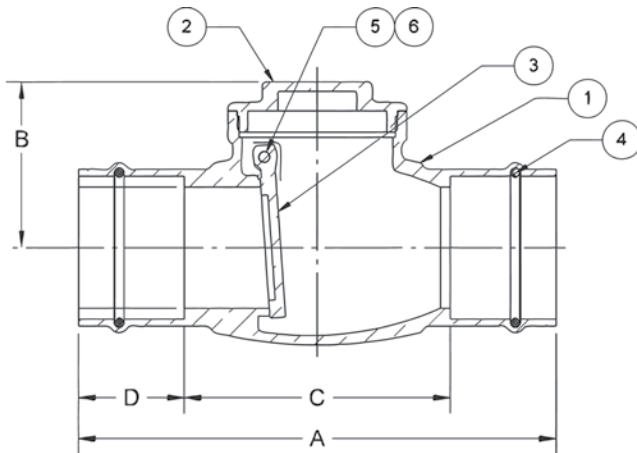

Note: Not intended for use in potable water.

MATERIAL LIST			
No.	PART	MATERIAL	SPECIFICATION
1	Body	Brass	ASTM B283, C37700
2	Cap	Brass	ASTM B283, C37700
3	Disc	Brass	ASTM B283, C37700
4	O-Ring	EPDM	D2000 NSF61
5	Pin	St. Steel	ASTM A276 TY. 304
6	Side Plug	Brass	ASTM B124, C37700

* Ultra Press Valves are designed and qualified for use in copper tubing systems only, Types K, L, & M per ASTM B88. For installation instructions please see engineering section on website.

DIMENSIONS - INCHES/MILLIMETERS					
Units	Size	A	B	C	D
Inches	1/2	3.35	1.38	1.7	0.83
mm		85	35	43	21
Inches	3/4	3.74	1.43	1.75	0.99
mm		95	36	45	25
Inches	1	4.36	1.74	2.38	0.99
mm		111	44	61	25
Inches	1 1/4	4.97	1.99	2.92	1.02
mm		126	51	74	26
Inches	1 1/2	6.13	2.28	3.3	1.42
mm		156	58	84	36
Inches	2	7.16	2.48	3.99	1.59
mm		182	63	101	40

INNOVATION IN EVERY VALVE

The information presented on this sheet is correct at time of publication. Milwaukee Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to www.milwaukeevalve.com. † State of California Prop 65
WARNING: Cancer and Reproductive Harm. For more information visit www.p65warnings.ca.gov.



MILWAUKEE VALVE