

Features

Solid brass construction
Euro-motion ceramic disc 35 mm valve cartridge
Cartridge stem adapter ensures secure handle-to-stem interface
Two-function, push-button control spray engine with solid brass housing
Magnetic docking system secures spray engine to spout
Pivoting-ball spray engine inlet fitting for enhanced directional control
8.62" (21.9 cm) spout height at outlet
7.42" (18.8 cm) spout reach (c-c)
ADA Compliant (Handles Only)
1.8 GPM (6.8 LPM) Max

PULL-DOWN PREP SINK / BAR FAUCET


3180-5223



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

ASME A112.18.1/CSA B125.1
IAPMO/cUPC
NSF/ANSI/CAN 61, SECTION 9
NSF/ANSI 372
IPC
ADA & ICC/ANSI A117.1 (Handle Only)
Energy Policy Act of 1992
California Energy Commission
ASME A112.18.3 (Back Flow)
All applicable US Federal and State material regulations

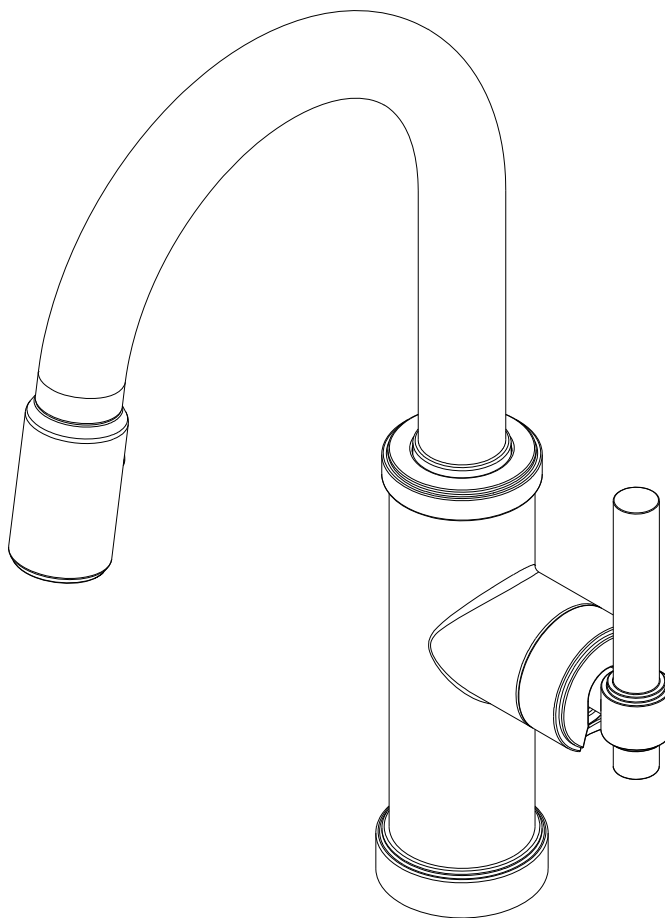

PRODUCT DIMENSIONS *(Units are in inches)*

Technical drawing of a vertical mast assembly. The drawing shows a side view of the mast with various components and dimensions. The dimensions are given in inches and millimeters (in brackets).

- Top dimension: 4.79 [121,7]
- Dimension from the top of the mast to the center of the horizontal arm: 6.82 [173,2]
- Dimension from the center of the horizontal arm to the bottom of the mast: 4.16 [105,6]
- Dimension from the bottom of the mast to the bottom of the horizontal arm: 3.31 [84,2]
- Dimension from the bottom of the mast to the bottom of the horizontal arm (labeled MAX DECK THICKNESS): 2.83 [71,9]

