




# STEP SAVING VALVES FOR THE PROFESSIONAL

**NEW PRESS × 1/4" COMPRESSION SIZES**



*Perfect for humidifiers and ice makers*

- New Press × 1/4" Compression sizes
- Ideal for branch or device connections in tight locations
- Lead-free DZR brass construction
- Replaces multiple components
- Saves labor, space, and leak paths
- Adjustable packing gland
- Reversible handle on select models



**WORK SMARTER**

**SAVE 15 MINUTES**

**ELIMINATE 2 LEAK PATHS**

**PRO-PAL T-VALVE**  
Forged DZR Brass Ball Valve w/ Integrated Tee Fitting, Adjustable Packing Gland

**LEAD-FREE BRASS**  
Certified to NSF/ANSI/CAN 61 & 372

SIZE	ITEM#	CTN/CASE	CASE WT
<b>OD Comp Valve × Press Run</b>			
1/4" × 1/2"	H-80670W-T12	8/96	40
1/4" × 3/4"	H-80670W-T34	6/48	26
3/8" × 1/2"	H-80671W-T12	8/96	38
3/8" × 3/4"	H-80671W-T34	6/48	25
<b>OD Comp Valve × Push Run</b>			
1/4" × 1/2"	H-60670W-T12	8/96	30
1/4" × 3/4"	H-60670W-T34	6/48	20
3/8" × 1/2"	H-60671W-T12	8/96	30
3/8" × 3/4"	H-60671W-T34	6/48	19
<b>OD Comp Valve × F1807 PEX Run</b>			
3/8" × 1/2"	H-10671W-T12	8/96	26
3/8" × 3/4"	H-10671W-T34	8/96	25
<b>OD Comp Valve × F1960 PEX Run</b>			
3/8" × 1/2"	H-30671W-T12	8/96	28
3/8" × 3/4"	H-30671W-T34	6/48	18



**Webstone**  
a brand of **NIBCO**

**VALVE INNOVATION  
INSTALLATION SOLUTIONS**


webstonevalves.com



# FULL-PORT OPTIONS FOR LARGER INSTALLATIONS



- Lead-free full port forged DZR brass construction
- Replaces multiple components
- Saves labor, space, and leak paths
- Adjustable packing gland
- Reversible handles
- Available G-Series models for a custom installation



**WORK SMARTER**

SAVE  
**15**  
MINUTES

ELIMINATE  
**2**  
LEAK PATHS

*Ideal for expansion tank and return header connections*



### PRO-PALT-VALVE

Full Port Forged DZR Brass Ball Valve w/ Integrated Tee Fitting, Adjustable Packing Gland, & Reversible Handle

#### LEAD-FREE BRASS


Certified to NSF/ANSI/CAN 61 & 372

SIZE	ITEM#	CTN/CASE	CASE WT
<b>FIP Valve x Press Run</b> 250 PSI CWP/250°F Max			
1/2"	H-82672W	4/40	23
1/2" x 3/4"	H-82672W-T34	4/16	16
3/4"	H-82673W	4/16	16
3/4" x 1/2"	H-82673W-T12	4/40	34
1"	H-82674W	2/16	26
1" x 1 1/4"	H-82674W-T114	2/16	30
1 1/4"	H-82675W	2/16	39

#### BODY ONLY • INSTALL W/ (3) G-UNION FITTINGS

<b>G-Thread Valve x G-Thread Run</b> 200 PSI CWP/200°F Max			
1"	H-G7674W	1/12	22
1" x 1 1/2"	H-G7674W-T112	1/12	30
1 1/2"	H-G7676W	1/8	30

## G-SERIES FITTINGS & ACCESSORIES

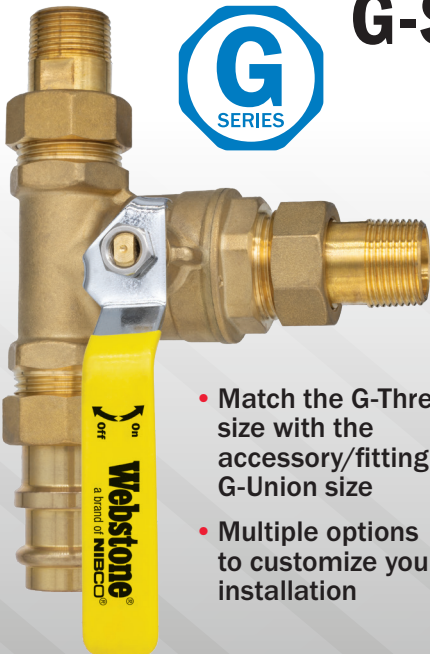

- Match the G-Thread size with the accessory/fitting G-Union size
- Multiple options to customize your installation

G-UNION SIZE	SYSTEM PIPING	FIP	MIP	SWT	Press	Push	F1960 PEX	F1807 PEX
<b>Forged DZR Brass Fitting</b>								
1"	1/2"	H-7-2102W WP	H-7-4102W WP	H-7-5102W WP	H-7-8102W WP	H-7-6102W WP	H-7-3102W WP	H-7-1102W WP
1"	3/4"	H-7-2103W WP	H-7-4103W WP	H-7-5103W WP	H-7-8103W WP	H-7-6103W WP	H-7-3103W WP	H-7-1103W WP
1"	1"	H-7-2104W WP	H-7-4104W WP	H-7-5104W WP	H-7-8104W WP	-	H-7-3104W WP	H-7-1104W WP
1 1/2"	1"	H-7-2164W WP	H-7-4164W WP	H-7-5164W WP	H-7-8164W WP	-	-	--
1 1/2"	1 1/4"	H-7-2165W WP	H-7-4165W WP	H-7-5165W WP	H-7-8165W WP	-	-	-
1 1/2"	1 1/2"	H-7-2166W WP	H-7-4166W WP	H-7-5166W WP	H-7-8166W WP	-	-	-

### G-UNION ELBOW

Forged DZR Brass Fitting

#### LEAD-FREE BRASS

Certified to NSF/ANSI/CAN 61 & 372

SIZE	ITEM#	CTN/CASE
G-Union x G-Thread	150 PSI CWP Max	
1"	H-7-G144W-A	10/60



### DUAL SCALE TEMPERATURE GAUGE

w/ Integrated Forged Brass Fitting • 1 1/2" Dial Temperature Range 32°- 248°F

#### LEAD-FREE BRASS

SIZE	ITEM#	CTN/CASE
G-Union x G-Thread		
1"	H-32000W	10/100