



PEERLESS®

Mounting without escutcheon plate

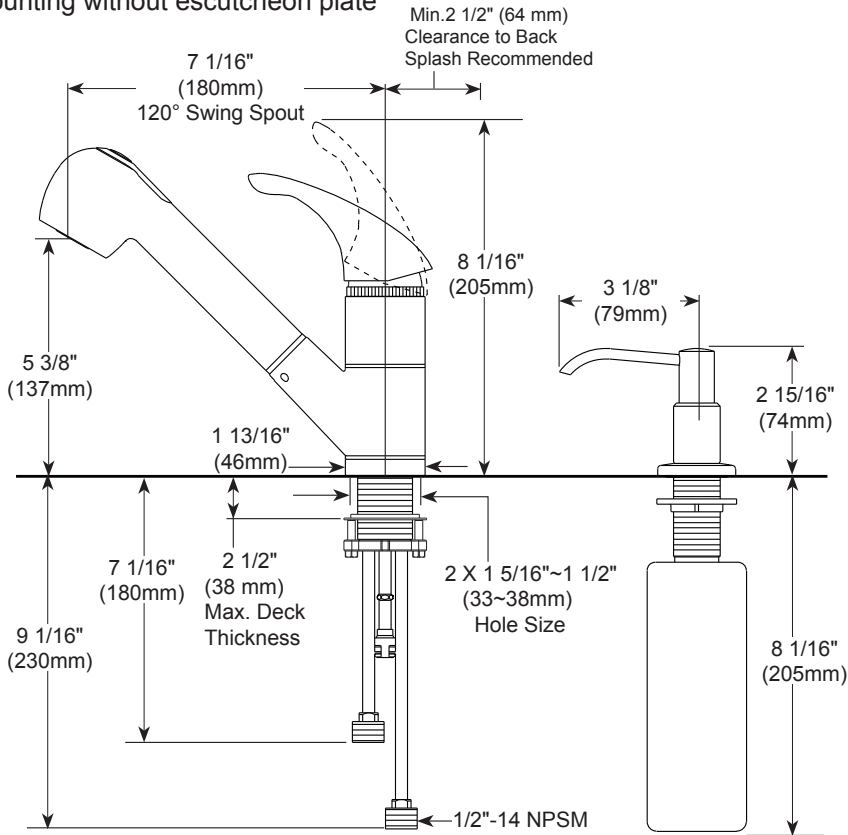


Mounting with escutcheon plate

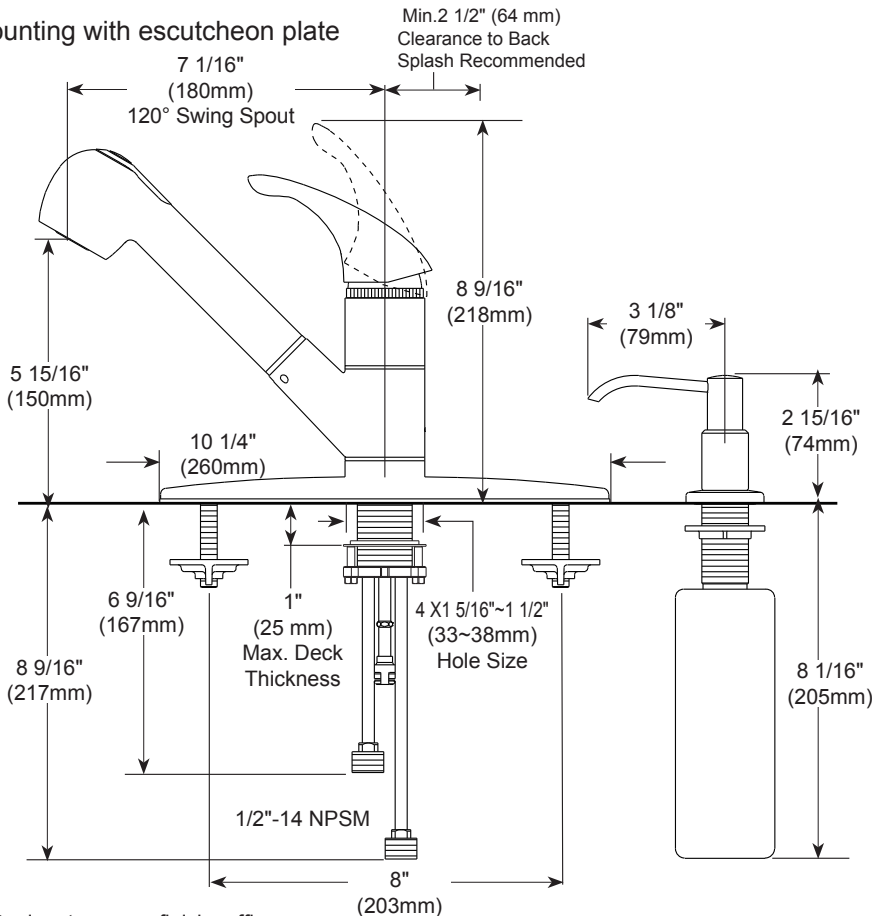

▲ Designate proper finish suffix

PSP-K-P18550LF Rev D

P18550LF▲
P18550LF▲-SD

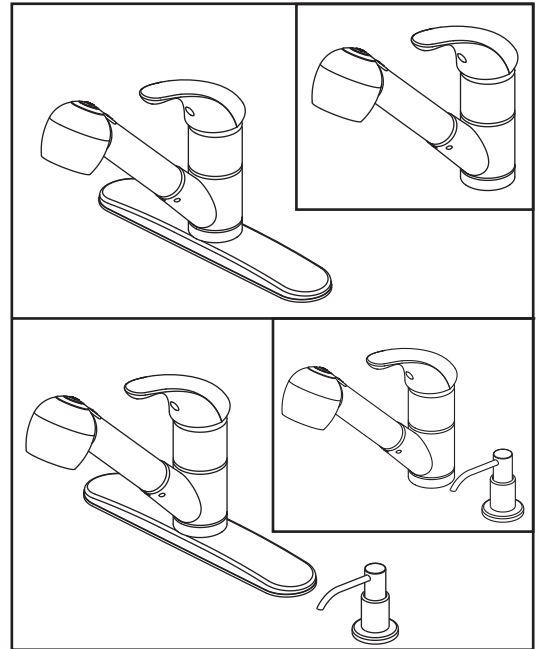

KITCHEN FAUCETS

- Single handle pull-out
- 1, 2, 3 or 4 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa (P18550LF▲)
- Maximum 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa (P18550LF▲-SD)
- Single handle kitchen faucet for exposed mountings on 1 and 3 hole sinks with 8" centers. (P18550LF▲ only)
- Single handle kitchen faucet for exposed mountings on 2 and 4 hole sinks with 8" centers. (P18550LF▲-SD & P18550LF▲-SD-W)
- Standard 7 1/16" (180mm) long spout swings 120
- Replaceable rotating ball valve with replaceable non-metallic seats
- 1/2"-14 NPSM threaded male inlet adapters.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ☐ Indicates compliance to ICC/ANSI A117.1