

*For Residential and Commercial Applications*

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## PLS1-\*\*KC      Stainless Steel Flexible Braided Faucet Water Connector - Compression Inlet x Compression Outlet



**Use:** For use only in potable water distribution systems in accessible locations only.

**Part Listing:**

- PLS1-12KC F      3/8" compression x 3/8" compression x 12" length, flag label
- PLS1-16KC F      3/8" compression x 3/8" compression x 16" length, flag label
- PLS1-20KC F      3/8" compression x 3/8" compression x 20" length, flag label

<b>Operating Specifications</b>	
<b>Temperature</b>	<b>Pressure</b>
40° - 160° F, Intermittent to 180° F	125 PSI maximum

<b>CONNECTOR MATERIAL SPECIFICATIONS</b>	
<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	Stainless steel wire
<b>Barb</b>	Brass
<b>Ferrule</b>	Stainless steel
<b>Nut</b>	Brass
<b>Washer</b>	Rubber
<b>Compression Nut</b>	Brass
<b>Compression Ring</b>	Brass

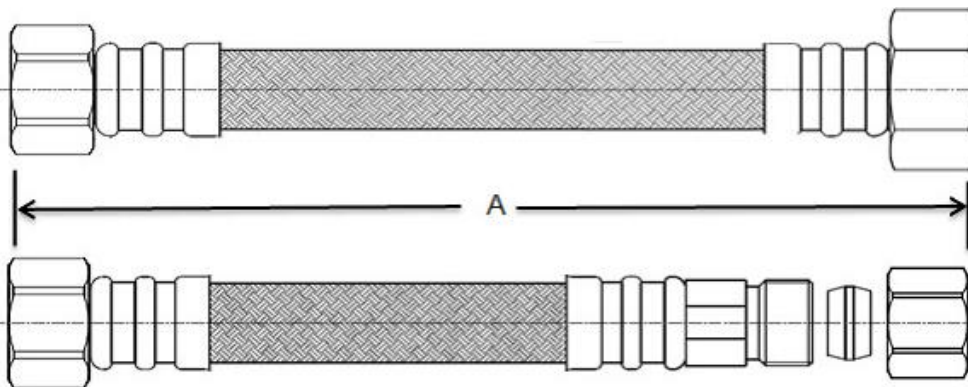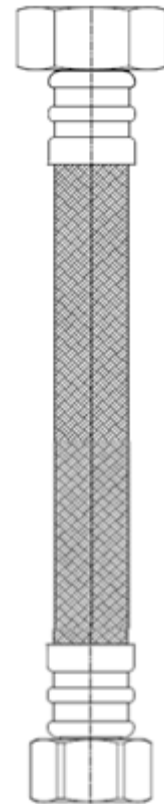

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>DIM. A</b>
PLS1-12	12.0/13.0
PLS1-16	16.0/17.0
PLS1-20	20.0/21.0

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9



*This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.*

