


## SIDEWINDER® FOR WOOD - Horizontal Application

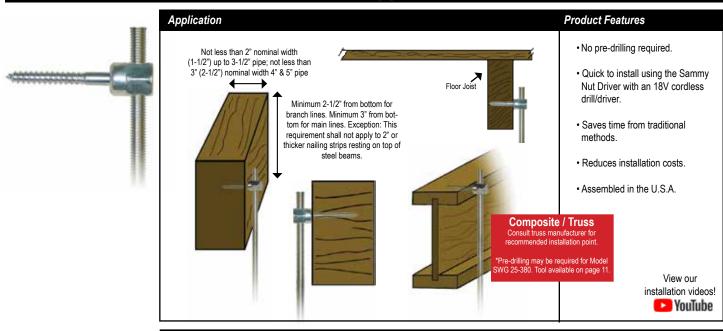

	-	1		
	1	ì		
	4	b		_
ı			ı	
١	89	81	ı	


#14 SW Red Nut Driver Part # 8114910

## Case Qty Part Screw Ultimate **UL Test** Box Approvals Model Size Descriptions Shear (lbs) Load (lbs) Qty HORIZONTAL MOUNT 8020957 SWG 10 300 25 (4) 3/8" 1/4 x 1" 622 (Fir) 125 **.** 3/8" 8021957 1050 125 **SWG 20** 1/4 x 2" 1725 (Fir) 25 Ð 3/8" 8022925 SWG 25-380 3/8 x 2-1/2" 2249 (Fir) 1500 25 125 Ų, 3/8"\* 8023925 **SWG 30** 1/4 x 3" 1884 (Fir) 25 125

## SAMMYS SWIVEL HEAD™ FOR WOOD - Swivel Application



Part # 8273910

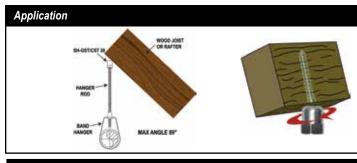

## **Product Features**

- · Eliminates distortion of threaded rod.
- Accommodates up to 3 ½" x 12 pitch roof.
- · Allows 17° deflection from vertical.
- · Saves time from traditional methods.
- · Reduces installation costs.
- · Assembled in the U.S.A.

	Approvals	Rod Size	Part Number	Model	Screw Descriptions	Ultimate Pullout (lbs)	UL Test Load (lbs)	FM Test Load (lbs)	Min Thickness	Box Qty	Case Qty
	SWIVEL MOU	JNT									
	Ω.⊚	3/8"	8139957	SH-GST 20	1/4 x 2"	1257 (Fir)	1050	1475		25	125
-		3/8"*	8269957	SH-GST/CST 20	5/16 x 1-3/4"	1903 Dim. Lumber 1406 @ 45°off vertical Dim. Lumber	1500 850 @ 45°			25	125

May require pre-drilling; consult joist manufacturer. #14 SH Orange

<sup>\*\*</sup> Will not swivel until installed with black nut driver.