



# SUREBONDER®

BETTER BONDING™

SINCE 1968



**SPECIALTY ADHESIVES**

**PROFESSIONAL GLUE GUNS**

**HOT MELT GLUE MANUFACTURER**

INDUSTRIAL PRODUCT CATALOG

# ADHESIVE GUIDE

FORMULA	APPLICATION	AVAILABLE SIZES	
		DIAMETER	LENGTH
425	<b>APAO</b> adhesive ready for either bead or spray delivery. In bead form use for glue assist projects and in spray form use for foam-to-foam, foam-to-fabric applications and more. 3 Minute Open Time. Color: White	7/16"	10"
		5/8"	15"
601	<b>LOW MELT PACKAGING</b> adhesive for sealing corrugated cartons. Will bond to most porous materials. 5 Second Open Time. Color: Tan	7/16"	10", 15"
		5/8"	2", 10"
		5/8"	8" (Ridged)
		3/4"	2 1/2"
		Pellets	
701	<b>FAST-SET PACKAGING</b> adhesive for sealing corrugated cartons. Also great for carpet back seaming, resists cracking at low temperatures. Will bond to most porous materials: wood, paper, and cloth. 15 Second Open Time. Color: Tan  Also available in Pellets, ask for details.	7/16"	10", 15"
		5/8"	2", 10"
		5/8"	8" (Ridged)
		3/4"	2 1/2"
		1"	3"
1 3/4"	1 3/4"		
707	<b>HIGH PERFORMANCE</b> adhesive for difficult-to-bond substrates. Will adhere to most porous or non-porous materials. Bonds to glass, leather, metal, plastic, magnets, ceramics, wood, ABS, PVC and some vinyls. 30 Second Open Time. Color: Clear	5/16"	4"
		7/16"	10", 15"
		5/8"	10"
		Pellets	
711	<b>FAST SET PACKAGING</b> adhesive for sealing corrugated cartons. Excellent hot tack, short open time and good delivery rate. Good adhesion to plain and some coated corrugated packaging and paper products. 10 Second Open Time. Color: Tan	7/16"	10", 15"
		5/8"	2", 10"
		3/4"	2 1/2"
		1"	3"
		Pellets	
725	<b>GENERAL PURPOSE ALL-TEMP</b> adhesive. Works at either low temp (250° F) or high temp (380° F). Bonds to porous and non-porous substrates. 60 Second Open Time. Color: Clear  Also available in Glue Rolls and Pellets, ask for details.	5/16"	4", 10"
		7/16"	4", 10", 15"
		5/8"	2", 10"
		5/8"	8" (Ridged)
		3/4"	2 1/2"
1"	3"		
735	<b>HIGH STRENGTH</b> adhesive for metal, plastic, fabric, leather, wood, ceramics, coated papers and non-porous materials. Exhibits good resistance to shock in low and ambient temperatures. 25 Second Open Time. Color: Amber	7/16"	10", 15"
		5/8"	2", 10"
		3/4"	2 1/2"
		1"	3"
		Pellets	
738	<b>GENERAL PURPOSE</b> adhesive for woodworking and carpets. Low viscosity, very good hot tack. 15 Second Open Time. Color: Tan	7/16"	4", 10"
		5/8"	10"
		3/4"	2 1/2"
739	<b>HIGH STRENGTH WOOD</b> adhesive provides a strong bond to wood and is also used for auto body dent removal. 25 Second Open Time. Color: Amber	7/16"	10"

FORMULA	APPLICATION	AVAILABLE SIZES	
		DIAMETER	LENGTH
830	<b>LOW MELT HIGH PERFORMANCE</b> adhesive works well with either high or low temp glue guns. High temp bonds to: corrugated cartons and most porous materials. Low temp bonds to: corrugated cartons and also heat sensitive substrates such as styrofoam, paper, fabric and ribbons. 25 Second Open Time. Color: Off-White	7/16" 5/8" 1"	15" 8" (Ridged) 3"
925	<b>ACRYLIC HIGH PERFORMANCE</b> adhesive developed for superior bonding to hard-to-bond surfaces. This adhesive is strong and flexible with a medium open and set time. Bonds to: concrete, vinyl, metal, rubber, tile, stone, ceramics, leather, melamine, coated papers, foil, wood, nylon, fabric, glass and plastic. 60 Second Open Time. Color: Clear	7/16" Pellets	10"
930	<b>3 MINUTE HIGH PERFORMANCE</b> adhesive, use in bead or spray form. Has a long open time for difficult-to-bond surfaces. Bonds to a variety of plastics, metal, wood, vinyl, glass and ceramics. 180 Second Open Time. Color: Off-White	7/16" 5/8"	10" 15"
3190	<b>HIGH PERFORMANCE</b> adhesive for difficult-to-bond substrates. Will adhere to most substrates, porous or non-porous materials. Bonds to glass, leather, metal, plastic, magnets, ceramics, wood, ABS, PVC and some vinyls. 45 Second Open Time. Color: Clear	7/16"	10"
4588	<b>GENERAL PURPOSE</b> polyamide adhesive, elastomeric high performance general purpose hot melt. Excellent impact resistance at low temperatures. Excellent high temperature resistance. Bonds to many substrates: metal, plastic, wood, leather, fabric, non-woven fabric, film and foil. 25 Second Open Time. Color: Amber	7/16"	10"
B-10154	<b>FUGITIVE PRESSURE-SENSITIVE</b> adhesive forms a peel-able bond between many substrates: polyethylene, polypropylene and paper. Most commonly used for affixing credit cards to brochures. It can also be used in spray form. Long Open Time. Color: Clear	0.8 lb Chubs	
B-2000	<b>GENERAL PURPOSE "LOW STRINGING"</b> adhesive adheres to non-porous materials: metal, plastic, glass and ceramics. Traditionally, used in glue skillets for the floral industry. 35 Second Open Time. Color: Cream	Pellets	
B-4930	<b>AGGRESSIVE TACK PRESSURE-SENSITIVE</b> adhesive forms a permanent bond to many substrates. Bonds to metal, wood, plastic, foam and paper. Long Open Time. Color: Clear	0.8 lb Chubs	
S-12478-10	<b>POLYAMIDE</b> adhesive, elastomeric high performance general purpose hot melt. Excellent impact resistance at low temperatures. Excellent high temperature resistance. Bonds to many substrates: metal, plastic, wood, leather, fabric, non-woven fabric, film and foil. 75 Second Open Time. Color: Amber	7/16"	10"

# PROFESSIONAL GLUE GUNS



## PRO2-500 ADJUSTABLE TEMP

- Adjustable temp from 220° F to 400° F
- 500 Watt heater, greater glue output
- Comfort rubber grip handle
- Stroke adjustment screw
- Integrated gun balancer mount hole
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- Lighted on/off switch

Includes: Extra nozzle + storage case  
 Uses: 5/8" (0.62") dia. glue sticks  
 Weight: 1.75 lbs | Watts: 500



## PRO9700A ADJUSTABLE TEMP

- Adjustable temp from 220° F to 400° F
- Ergonomic long trigger design
- Comfort rubber grip handle
- Stroke adjustment screw
- Integrated gun balancer mount hole
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- Lighted on/off switch

Includes: Extra nozzle, 2 detachable stand styles + storage case  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 1.6 lbs | Watts: 300



## PRO2-220 ADJUSTABLE TEMP

- Adjustable temp from 220° F to 400° F
- Ergonomic long trigger design
- Stroke adjustment screw
- Integrated gun balancer mount hole
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- Lighted on/off switch

Includes: Extra nozzle, 2 detachable stand styles + storage case  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 1.3 lbs | Watts: 220



## PRO2-220HT HIGH TEMP

- Operating temp of 380° F
- Ergonomic long trigger design
- Stroke adjustment screw
- Integrated gun balancer mount hole
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- Lighted on/off switch

Includes: Extra nozzle, 2 detachable stand styles + storage case  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 1.3 lbs | Watts: 220





**PRO8000A QUICK HEATING**

- Operating temp of 380° F
- Dual Heaters
- Ergonomic finger trigger design
- Stroke adjustment screw
- Integrated gun balancer mount hole
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- Lighted on/off switch

Includes: Extra nozzle + 2 detachable stand styles  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 1.45 lbs | Watts: 180



**PRO2-100 HIGH TEMP**

- Operating temp of 380° F
- For high-temp applications
- Ergonomic long trigger design
- Comfort rubber grip handle
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- On/off switch

Includes: Detachable wire stand  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 0.9 lbs | Watts: 100



**PRO2-100L LOW TEMP**

- Operating temp of 250° F
- For low-heat applications
- Ergonomic long trigger design
- Comfort rubber grip handle
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- On/off switch

Includes: Detachable wire stand  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 0.9 lbs | Watts: 100



**HE-750 HIGH TEMP**

- Operating temp of 380° F
- Ergonomic finger trigger design
- Interchangeable nozzles available

Includes: Detachable wire stand  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 0.8 lbs | Watts: 80



**PRO2-80 HIGH TEMP**

- Operating temp of 380° F
- Ergonomic long trigger design
- Integrated gun balancer mount hole
- Protective heat resistant nozzle cover

Includes: Detachable wire stand  
 Uses: 7/16" (0.43") dia. standard glue sticks  
 Weight: 0.85 lbs | Watts: 80



# BATTERY OPERATED GLUE GUNS



## PRO2-60 18V CORDLESS

- Operating temp of 380° F
- Works with any 18 Volt Ryobi® style battery (not included)
- Comfort rubber grip handle
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- On/off switch and power indicator light

Includes: Glue gun

Uses: 7/16" (0.43") dia. standard glue sticks

Weight: 0.85 lbs | Watts: 60

NOTE: Battery & charger are required but NOT included



## HYBRID-120 18V CORDLESS/CORDED

- Operating temp of 380° F
- Works with any 18 Volt Ryobi® style battery (not included)
- Ergonomic long finger trigger design
- Interchangeable nozzles available
- Protective heat resistant nozzle cover
- On/off switch and power indicator light

Includes: Glue gun, extra nozzle, 8ft. A/C power cord + storage case

Uses: 7/16" (0.43") dia. standard glue sticks

Weight: 1.15 lbs | Watts: 120

NOTE: Battery & charger are NOT included

# CORDLESS GLUE GUN KITS

## PRO2-60KIT

- Kit Includes:
- (1) PRO2-60 cordless glue gun
- (1) 18V Ryobi® style lithium-ion battery
- (1) Ryobi® style charger



**WORKING TIME  
WITH 2Ah BATTERY**



## HYBRID-120KIT

- Kit Includes:
- (1) HYBRID-120 cordless glue gun
- (1) 18V Ryobi® style lithium-ion battery
- (1) Ryobi® style charger
- (1) Extra nozzle
- (1) Storage case
- (1) 8ft. A/C power cord



**WORKING TIME  
WITH 2Ah BATTERY**

## FREEDOM TO GLUE ANYWHERE!



## BATTERY ADAPTERS

- For use with either PRO2-60 or HYBRID-120 cordless glue guns
- Slide and click adapter into your existing 18V or 20V battery
- 3 Models available

**MIL-18V** (Fits Milwaukee® 18V Battery)

**MAK-18V** (Fits Makita® 18V Battery)

**DEW-20V** (Fits DeWalt® 20V Battery)



**Cordless  
Glue Gun**

+

**18V/20V  
Adapter**

+

**Existing  
Battery**

SUREBONDER® is a registered trademark of FPC and FPC is a trademark of FPC Corporation. All other trademarks or trade names are of their respective owners.

# SPRAY TECHNOLOGY

DISPENSE GLUE AS  
BEAD OR SPRAY

**ADJUSTABLE  
SPRAY PATTERN**  
FROM NARROW TO WIDE



## SPRAY-500

- Operating temp of 400° F
- Lighted on/off switch + LED "Ready" light
- Comfort rubber trigger grip
- Integrated gun balancer mount hole
- Use as bead or spray glue gun

Includes: 1 Bead nozzle, 1 spray nozzle, quick connect hose with air/pressure regulator + storage case

Uses: 5/8" (0.59") dia. glue sticks  
Weight: 3.5 lbs | Watts: 500

NOTE: Air compressor is NOT included but is required for spray applications. For bead use air compressor is NOT needed and air line MUST be disconnected before use.

## APPLICATIONS

Great for heat sensitive materials and large area coverage

- Insulation
- Cubicle & Office Partitions
- Case Inserts
- Rug Backings
- Furniture & Upholstery
- Headliners
- Packaging



# FEEL THE MOTORIZED POWER

SPEED, POWER & PRECISION FOR  
**MAXIMUM OUTPUT**

WITH MINIMAL USER EFFORT

## APPLICATIONS

Perfect for high volume projects

- Large Box Sealing
- Case Inserts
- Furniture & Upholstery
- Packaging
- Wood Working

### MGG-450

- Operating temp of 380° F
- Lighted on/off switch + LED "ready" light
- Rubber trigger grip
- Integrated gun balancer mount hole

Includes: Extra nozzle + storage case  
Uses: 7/16" (0.43") dia. standard glue sticks  
Weight: 2.75 lbs | Watts: 450

NOTE: NO air compressor needed

### MGG-500

- Operating temp of 380° F
- Lighted on/off switch + LED "ready" light
- Rubber trigger grip
- Integrated gun balancer mount hole

Includes: Extra nozzle + storage case  
Uses: 5/8" (0.62") dia. glue sticks  
Weight: 2.75 lbs | Watts: 500

NOTE: NO air compressor needed



# SPECIALTY ADHESIVES & APPLICATORS



## 753 STATIONARY PNEUMATIC HOT MELT APPLICATOR

- Designed for hands-free assembly line applications
- Adjustable temp of 200° F - 500° F
- 2 Pound melt tank capacity
- Shot timer - dispenses exact amounts of glue
- Foot switch for on-demand gluing
- Adjustable air pressure regulator
- NO complicated gear pump

Note:  
Air compressor  
is required but  
NOT included

Includes: 3 Interchangeable nozzles: 0.040", 0.080", 0.125" dia.  
Operating air pressure: 40 - 70 psi  
Dimensions: 8 3/8" x 10 1/4" x 18 1/2"  
Weight: Approx. 33 lbs.

## PRO100 ADHESIVE SYSTEM

- Dispenses pressure-sensitive adhesives
- Operating temps of LOW: 250° F & HIGH: 325° F
- Uses: Hot melt glue cartridges, **sold separately**

Works with  
permanent & removable  
adhesives



## AT-4930 GLUE CARTRIDGE

- General purpose, pressure-sensitive adhesive with an aggressive tack
- Works on foam, plastic, paper and more

## AT-10154 GLUE CARTRIDGE

- Fugitive, removable, pressure-sensitive adhesive with a flexible bond
- Works with polyethylene, polypropylene, paper and more

NOTE: Glue cartridges are sold separately

# Glu Dabs

## GLU DABS

- Pre-made pressure-sensitive dots of adhesive
- Attach samples, offers, cards, etc. to products with no dry time
- For permanent or removable assembly applications
- Convenient dispenser box
- 6,000 Dabs per box
- Each dab is approx. 3/8" dia.
- 4 Formulas Available

DOT-L Low tack strength, removable, best for cardstock or paper  
DOT-M Medium tack strength, removable, best for cardstock or heavy paper  
DOT-H High tack strength, removable, best for product to product  
DOT-S Super tack strength, permanent, best for product to product




# ACCESSORIES

**THERE'S A NOZZLE FOR EVERY PROJECT!**

## SPECIALTY NOZZLES

- (A) 6032 "T" Carpet nozzle
- (B) 102 Block (ribbon) nozzle
- (C) 103F 0.053" Flat extension
- (D) 103R 0.125" Round extension
- (E) 103N 0.080" Needle extension
- (F) 101 0.160" Check valve
- (G) 103CS-125 0.125" Cap
- (H) 103CS-90 0.090" Cap
- (I) 103C-076 0.076" Cap

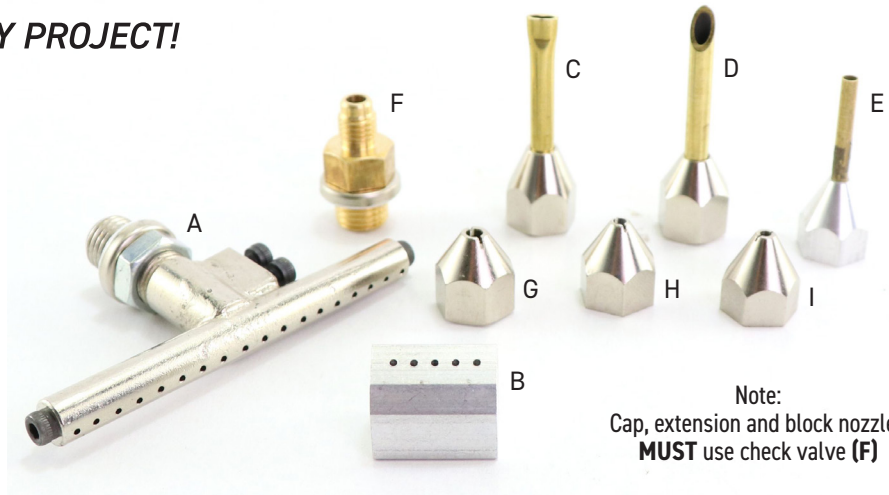

## GLUE PADS

- Protect and keep your work surface clean!
- Double-sided silicone pads
- Provide a non-stick, heat resistant surface for up to 400° F
- Easy to clean - allow glue to dry and peel off, use hot soapy water
- Perfect for any project
- 3 Sizes Available


- 6104 4" Round diameter pad
- 6100 8" x 8" Square pad
- 6201 19" x 19" Square pad with rules

**KEEP YOUR WORK SURFACE  
CLEAN & PROTECTED**

*HEAT RESISTANT*

*EASY TO CLEAN*

*SILICONE PADS*

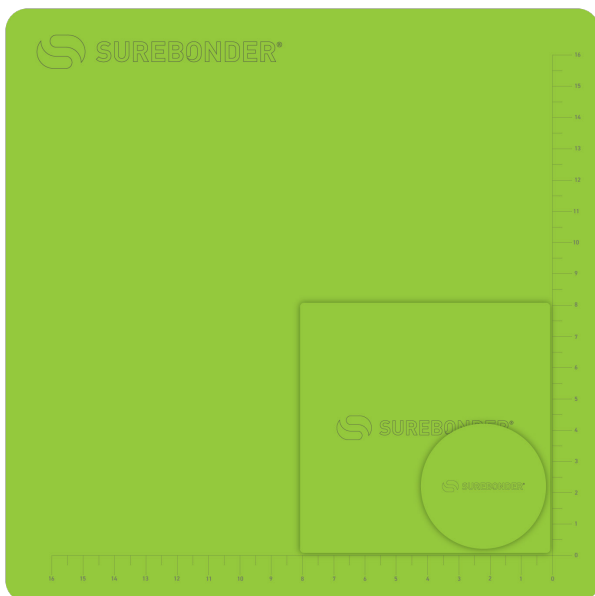



# SUREBONDER®

BETTER BONDING™  
SINCE 1968

Leading manufacturer of shaped

**hot melt products**

offering the best solutions  
for all of your projects!

