

CTS STRAP

» 525-02 and 525-03 SERIES

SimpleStrap™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief SimpleStrap™ CTS tube straps shall be used where necessary to secure 1/2" and 3/4" CTS tubing in residential or commercial applications. Strap is designed to work with Sioux Chief's perforated 525 series support brackets to secure horizontal water supply stub outs when penetrating through a wall or to stabilize 1/2" or 3/4" vertical pipe runs within the stud cavity. The SimpleStrap is compatible with copper, PEX or CPVC.

MATERIALS

Standard: High impact polypropylene (gray)

Glueable: ABS (natural)

INSTALLATION

Secure bracket to vertical wood or metal studs. Hold strap at an angle and position small round "tooth" through hole on support bracket at desired location. Move strap so that the steel bracket is captured behind the small vertical ears located above the pipe hole. Lift side of the strap opposite tooth up and over to hook onto the bracket. Push CTS tube or stub out through pipe hole. One step glue can be used on glueable clamp option on horizontal wall penetrations.

WORKING TEMPERATURE

140°F

Impact resistant to 0°F

SAFE WORKING LOAD

25 lbs.


DIMENSIONS

A: tube size	1/2" CTS	3/4" CTS
B: overall length	3.36"	3.36"
C: overall height	1.15"	1.15"
D: centerline of pipe to top of bracket	1.035"	1.16"



525-03

525-02G

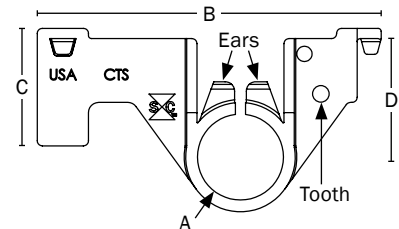

Made in USA

Create Item Number

525-0A

e.g. 525-02: 1/2" CTS SimpleStrap

TUBE SIZE A

2 = 1/2" CTS

3 = 3/4" CTS

2G = 1/2" CTS, glueable

3G = 3/4" CTS, glueable